
HAMPTON BAY.

Use and Care Guide Solid Wood Countertop

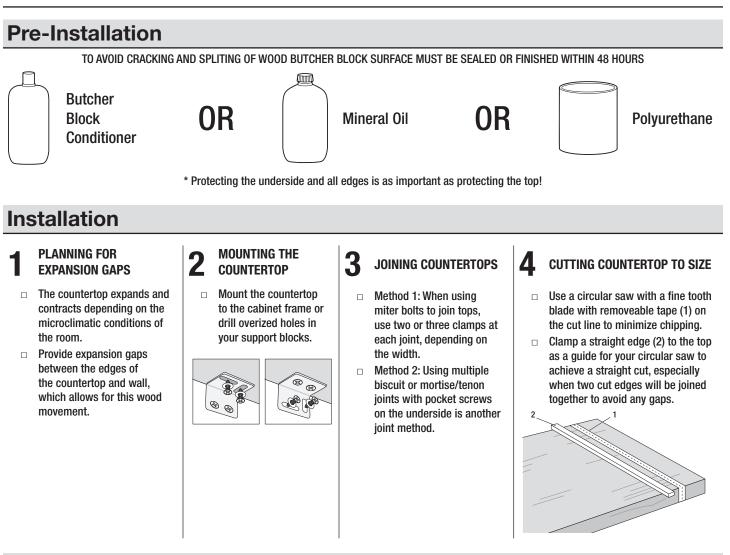

Maintenance

Finishing your countertop with oil or oil-wax

Strictly follow the manufacturer's instructions as to the use of any oil or oil-wax. Protective coating is sufficient when water remains on the countertop after a spill, without tendency to spread and penetrate the wood. Oil the countertop every three (3) to six (6) months to restore coating and each time when the surface begins to tarnish or drops of spilled water lose their natural shape and penetrate into the wood.

Low-maintenance options

Other finishing methods are allowed that provide equal protection against moisture such as polyurethane. Please see finish manufacturer's instructions for finish application.

Care and Cleaning

- Remove any spills from the surface. Do not allow the water to lie on the surface for a long time.
- $\hfill\square$ Always use protective mats or pads under hot dishes, or leave them to cool on the stove.
- Use a soft cloth and warm water when cleaning. Never use concentrated cleaning detergents, especially those containing bleach.

Additional Resources

Scan QR code for full detailed instructions.

Contact the Customer Service Team at 1-855-HD-HAMPTON or visit www.HAMPTONBAY.com.

