

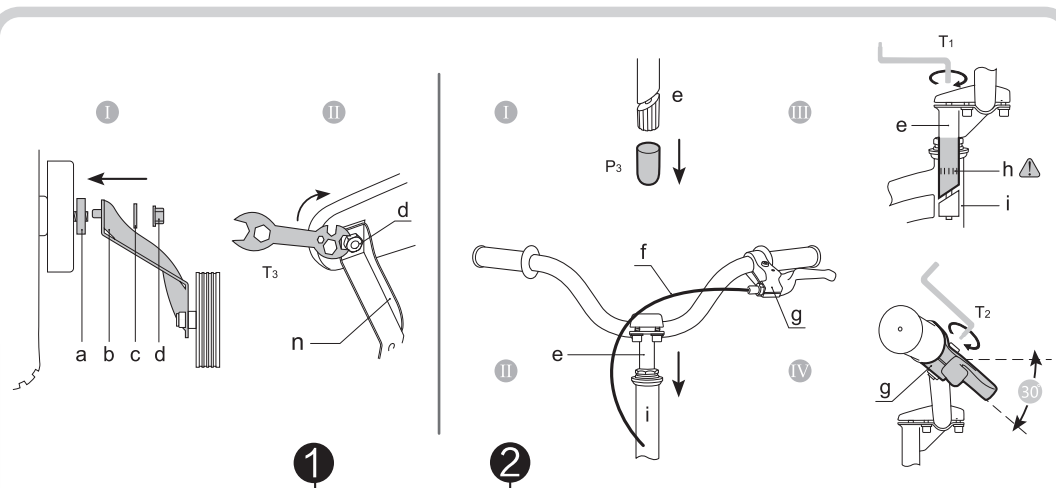


Installation Guide

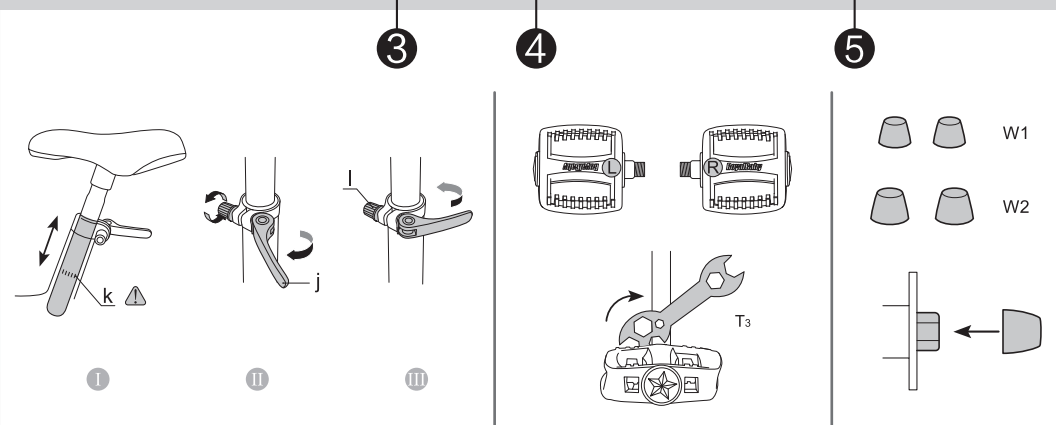

The illustration is for reference only.
The specification is subject to certain
items.

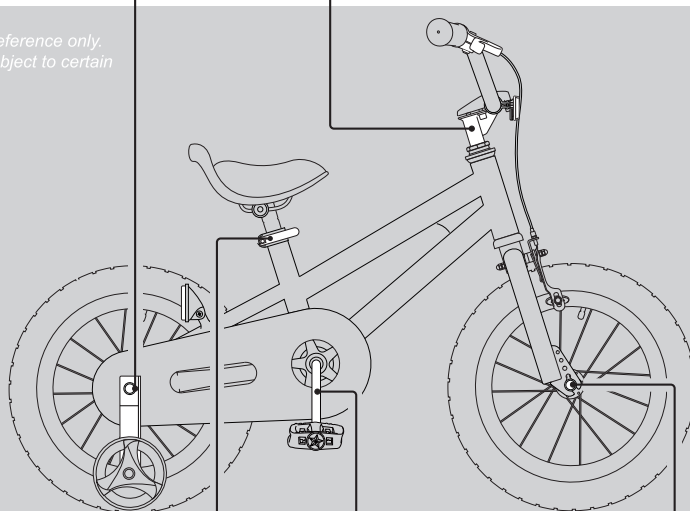

Preparation before assembling

- Prepare a scissor.
- Open the tools kit box and take out assembly tools (T1, T2, T3) and the training wheels, etc.
- Remove protective film and plastic protector (P1, P2, P3) (Please dispose as recyclable).

Start to Assemble

1 Fix the training wheels

(If the bike has already been equipped with a kickstand, move to the next step to assemble the pedals)

Use the supplied spanner T3 to remove the rear axle nut (d) and the nut washer (c) by screwing in counter-clockwise direction. Then successively assemble the training wheel washer (a), training wheel supporter (b), nut washer (c), and the nut (d). Tighten the nut (d) in clockwise direction and make sure the training wheel supporter is fixed.

Fix the other training wheel on the other side the same way.

2 Install the handlebar

Remove the black plastic Cap (P3) from the end of the stem wedge (e). Insert the stem (e) into the head tube (i) of the bicycle. Ensure that the Minimum Insertion Line (h) is below the top of the head tube (i) and the brake control cables (f) are in front of the bicycle. Align the stem and handlebar so it is in line with the front wheel. Tighten the bolt on the top of stem with the Hexagon wrench (T1) clockwise. Adjust the brake lever (g) into 30-40 degree. Tighten the bolt on the top of the brake lever (g) with the Hexagon wrench (T2) supplied with the bike.

3 Install the seat

Loosen the lever of the quick-release (j). Insert the seat post into the frame of the bicycle and adjust the seat to the proper height and angle. Tighten the adjusting nut (l) by hand and move the quick-release lever (j) forward to the closed position. If the seat still can move after installing, you must loosen the quick release and tighten the adjusting nut and re-tighten the quick release again till the seat is firmly fixed. (For the quick release with a safety button, you should push the button to loosen the quick release.) Make sure that the mark "Minimum Insertion" line (k) shouldn't be seen after installation.

4 Install the pedals

Match the pedal marked R with the right-hand crank arm, and match the pedal marked L with the left-hand crank arm. Place the threaded pedal into the threaded hole on the crank arm. Slowly turn the spindle the correct direction--CLOCKWISE for the right side pedal, COUNTERCLOCKWISE for left side pedal. Finally, use the wrench (T3) to tighten completely.

5 Plug on the plastic caps

Install the water proof plastic caps (W1, W2) onto nuts at both ends of front and rear axles.

By now the assembly of main parts of your RoyalBaby bicycle has completed. If you buy other components, such as the mudguards, basket, kickstand, please read the corresponding instructions to install them.

Please read the INSTRUCTIONS FOR USE AND MAINTENANCE carefully before your first riding. We strongly recommend that you perform full checks on bicycle before every riding, especially on the brakes and the tyres. Regular maintenance are really necessary.

If you have any more questions concerning assembly or riding, please feel free to contact us. Our after-sales service email: service@r-baby.net

Wish your child enjoy cycling!



Front Reflector---Fixed on the handlebar



Rear Reflector---Fixed on the bracket of the right rear fork

* Kickstand---Assemble the kickstand to the position where the left training wheel is. The procedure of assembling the kickstand is the same as that for training wheel. Kickstand is available for 16/18 inch bicycles.

