


Metal construction


Brass valve bodies

**Features** 

**PURIST**®

## K-14406 ALSO K-14407





# ALSO K-14407

# 0

- Reversible quarter-turn washerless ceramic disc valves
  Lower flow aerator options are available (refer to the continuous)
- Lower flow aerator options are available (refer to the Kohler Price Book)
- Pop-up drain with lift rod and tailpiece

Flexible connections for easy installation

- · Cross or lever handles
- 2.2 gpm (8.3 lpm) flow rate
- 5 1/2" (14 cm) spout

#### **Codes/Standards Applicable**

Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- IAPMO/UPC
- NSF 61
- Energy Policy Act of 1992 (EPACT)
- ASME A112.18.1/CSA B125.1

#### Colors/Finishes

- . CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

#### **Specified Model**

Model	Description		ADA		ADA
K-14406-3	Lavatory faucet with short cross handles	□ CP	□ Other		
K-14407-3	Lavatory faucet with tall cross handles			□ CP	☐ Other
Model	Description		ADA		ADA
K-14406-4	Lavatory faucet with short lever handles	□ CP	□ Other		
K-14407-4	Lavatory faucet with tall lever handles			□СР	☐ Other


#### **Product Specification**

Two-handle widespread lavatory faucet shall be of metal construction. Faucet shall feature brass valve bodies. Faucet shall feature reversible quarter-turn washerless ceramic disc valves, assuring positive handle stop positioning. Faucet shall include flexible connections, 5 1/2" (14 cm) spout, pop-up drain with lift rod and tailpiece, and cross or lever handles. Faucet shall be rated at 2.2 gallons (8.3 L) per minute. Faucet shall have lower flow aerator options. Faucet shall be Kohler Model K-

### **PURIST**<sub>®</sub>

#### **Installation Notes**

Install this product according to the installation guide.

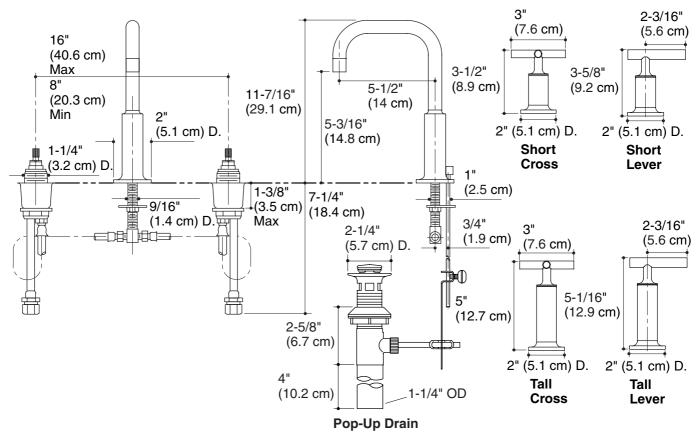

**Product Diagram** 

