

Ideal For


Flush Mount Ceiling | Drop-In Installation

Features

- Sleek Low Profile Design
- Instant Full Brightness (including in sub-zero temperatures)
- Full Range Dimmable
- Five Year Warranty
- UL/CUL Listed
- 3000 / 4000 / 5000 / Toggle 4way
- Energy Star®

Benefits

- 2 in 1 Installation -Install Flush to Ceiling or Wall Sconce
- No Light Bulbs to Replace or Dispose
- Durable
- · Long Life
- Even Light Distribution

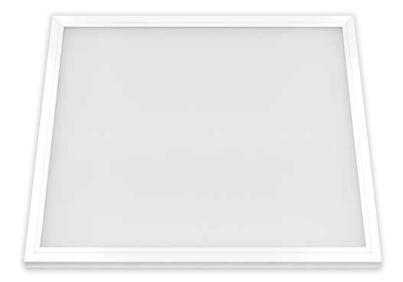



Specifications

Item Number	Input Power (Watts)	Input Line Voltage	CCT
FP1X1/4WY/WH/HD	11	120	3000K / 4000K/ 5000K
CRI	Lumens	Lumen Efficiency (LPW)	MOL
80	800	72.73	24"
Life Hours			
50,000			