



Parts List




A - wheel (1)




B - front frame (1)

Tools Required
2 Adjustable
Crescent Wrenches



C - wheel spacers (1)



D - long bolt (1)




E - washer (2)



F - nut (1)




G - detent pin (4)

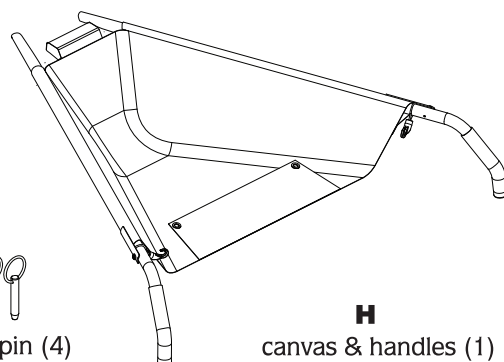



H
canvas & handles (1)

Easy To Assemble

1. Insert wheel spacers into wheel

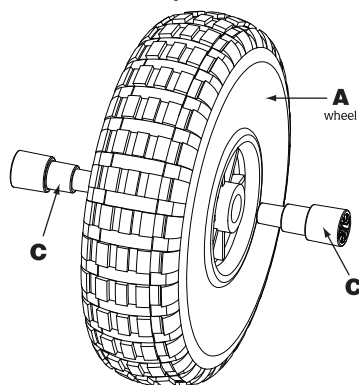

2. Assemble wheel to front frame.

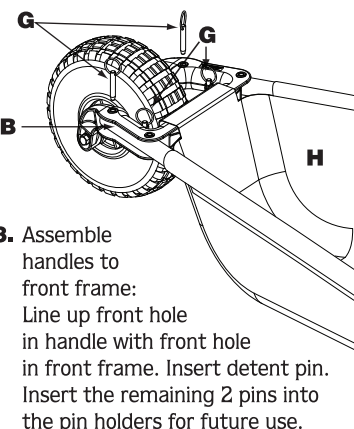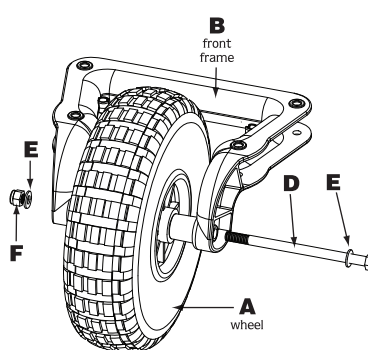


3. Assemble handles to front frame:
Line up front hole in handle with front hole in front frame. Insert detent pin. Insert the remaining 2 pins into the pin holders for future use.

Easy To Use


1. LOADING

(A) Open handles to their widest position.
(B) Fold rear flap down to rake material into wheel easy.

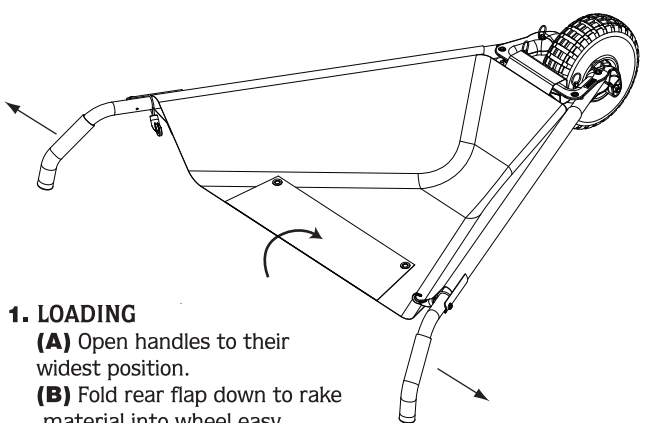


2. REAR FLAP USE

Use rear flap to keep loose material in the WheelEasy™ LE. Attach rear flap hooks as shown.

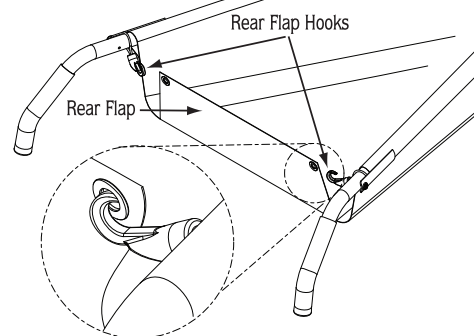

Easy To Store


In-Use
Pin Position

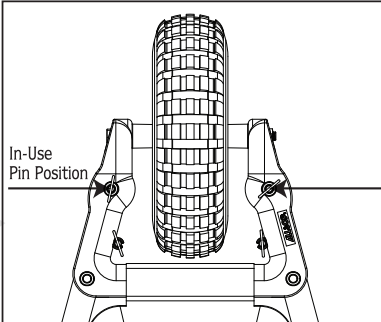

Position #1 – In-Use

Move detent pins to the forward, "in-use" position.


Transitional
Pin Position

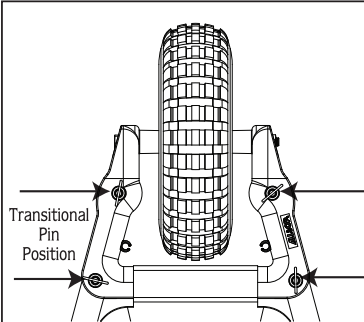

Position #2 – Transitional

Use additional pins to hold handles in place while changing positions
DO NOT USE IN THIS POSITION

Storage
Pin Position

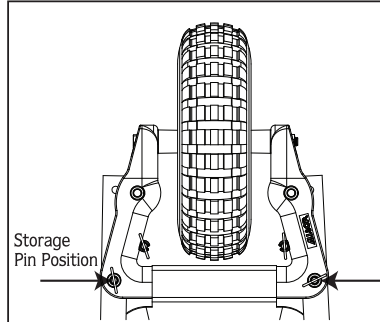

Position #3 – Fold and Store

Move detent pins to the rear, "storage" position to fold and store the WheelEasy™ LE.