

VEVOR[®]

TOUGH TOOLS, HALF PRICE

Technical Support and E-Warranty Certificate www.vevor.com/support

PRESSURE WASHER HOSE REEL CART

MODEL:GT0707

We continue to be committed to provide you tools with competitive price.

"Save Half", "Half Price" or any other similar expressions used by us only represents an estimate of savings you might benefit from buying certain tools with us compared to the major top brands and does not necessarily mean to cover all categories of tools offered by us. You are kindly reminded to verify carefully when you are placing an order with us if you are actually saving half in comparison with the top major brands.

VEVOR®

TOUGH TOOLS, HALF PRICE

PRESSURE WASHER HOSE REEL CART

MODEL:GT0707



NEED HELP? CONTACT US!

Have product questions? Need technical support? Please feel free to contact us:

 CustomerService@vevor.com

This is the original instruction, please read all manual instructions carefully before operating. VEVOR reserves a clear interpretation of our user manual. The appearance of the product shall be subject to the product you received. Please forgive us that we won't inform you again if there are any technology or software updates on our product.

	Warning-To reduce the risk of injury, user must read instructions manual carefully.
	This symbol, placed before a safety comment, indicates a kind of precaution, warning, or danger. Ignoring this warning may lead to an accident. To reduce the risk of injury, fire, or electrocution, please always follow the recommendation shown below.



Rules for Safe Operation

WARNING:

The following safety precautions are suggested. This Hose Reel Cart is designed, engineered and tested to offer reasonably safe and effective service, provided that it is operated in strict accordance with these instructions. Failure to do so may result in personal injury. Always observe the rules of safe operation. Please read and retain this manual.

1. Be alert for holes in the terrain and other hazards.
2. Follow maintenance and lubrication instructions as outlined in this manual.
3. Always wear substantial footwear. Do not wear loose fitting clothing that may get caught in moving parts.
4. DO NOT SIT OR STAND ON THIS ITEM.
5. This product is not a toy nor. Do not allow children to play with or near this item.
6. Use only on a flat, level, hard and smooth surface capable of safely supporting a fully loaded Chest.
7. Use as intended only.
8. Inspect before every use; do not use if parts are loose or damaged.

ASSEMBLY PRECAUTIONS:

1. Assemble only according to these instructions. Improper assembly can create hazards.
2. Wear ANSI-approved safety goggles and heavy-duty work gloves during


- assembly.
- 3.Keep assembly area clean and well lit.
 - 4.Keep bystanders out of the area during assembly.
 - 5.Do not assemble when tired or when under the influence of alcohol, drugs or medication.
 - 6.Product capabilities apply to properly and completely assembled product only.
 - 7.Assemble on a flat, level, hard and smooth surface capable of safely supporting a fully loaded Pressure Washer Hose Reel Cart.

SAVE THESE INSTRUCTIONS

Model	GT0707
Maximum Capacity. (5/8”Flexible Pipe)	300ft
Number of Wheels	4
Colour	Silver Gray

Carton Contents

Ref.	Description	Picture	QTY.
1	Side Frame		2
2	Cross Brace		1
3	Axle		2
4	Wheels		4
5	Hose Reel Ends		2

6	Push Handle		1
7	Hose Reel Center Hub		1
8	Water Coupling Tube		1
9	Crank Handle		1
10	Hose Extension		1
11	Wire Basket		1
12	Painted Water Coupler U-Bracket		1
13	Crank U-Bracket		1
14	Crank Bracket Bushing		1
15	Hose Washer		2
16	M6 x 35 Bolt		14
17	M6 x 25 Bolt		2
18	M6 x 15 Screws		13
19	Cotter Pin		4
20	12mm Large Washer		4
21	6mm Small Washer		16

22	M6 Nylock Nuts		16
23	Front Crank Frame		1
24	M6 Small Washer		13


Assembly Instructions

Tools Needed for Cart Assembly

(1) Screwdriver.

(1) M10 Wrench or Adjustable Wrench.

1. Install front crank frame to side frames using two M6 X 35 bolt sets. Next add cross brace to side frame using four M6 x 35 Bolt Sets. Slide axles through tabs on the bottom of side frames. See figure 1.

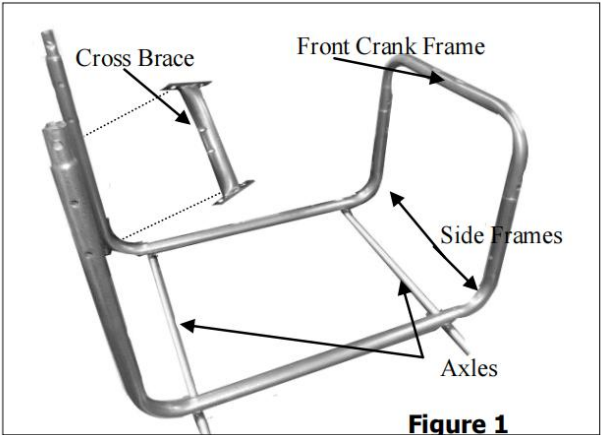

2. Install wheels using 12mm large washer and cotter pin.
See figure 2.



Figure 2

3. Attach hose reel end to the center hub using (6) M6 x 15 screws. repeat opposite side. See figure 3A.

Find the end of the center hub with the extra threaded screw hole and insert water coupler tube through this end first.

Attach water coupler tube to the center hub using the painted water coupler U-Bracket. See figure 3B.

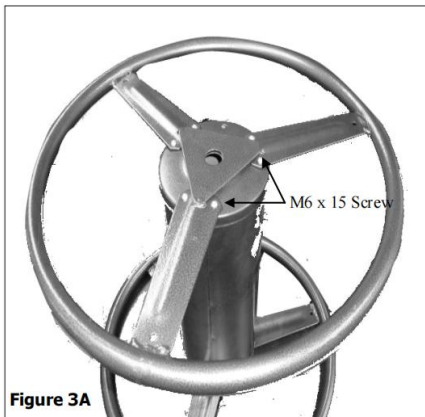


Figure 3A


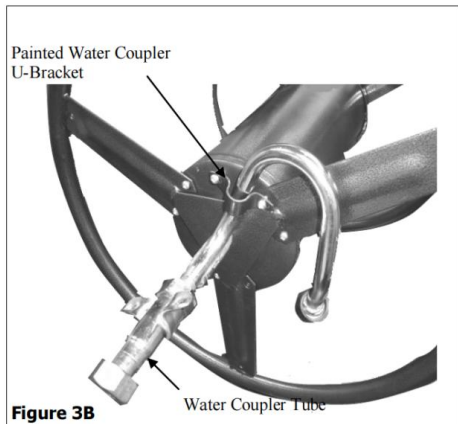



Figure 3B

4. Insert crank bushing into crank U-Bracket and attach to the front crank


frame using (2) M6 x 35 Bolt Sets. Insert crank handle through the crank bushing then slide hose reel onto crank handle securing with (2) M6 x 25 bolt sets. See figure 4.

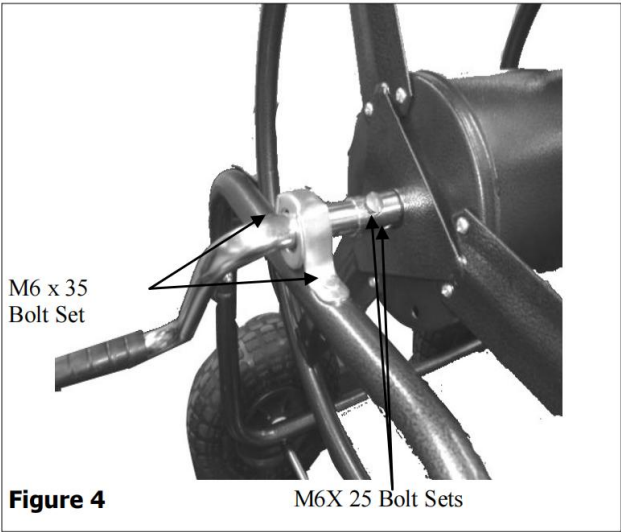


5.Attach opposite end of the hose reel to the cross brace using (2) M6 x 35 bolt sets.See figure 5.

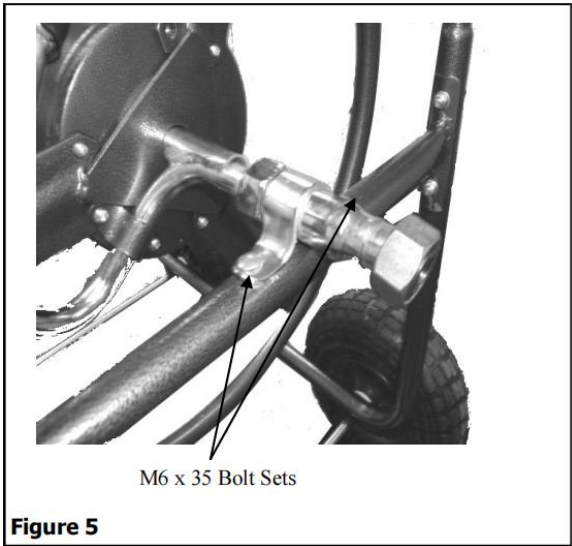


6. Assemble push handle onto cart frame using (2) M6x35 bolt sets. See figure 6.

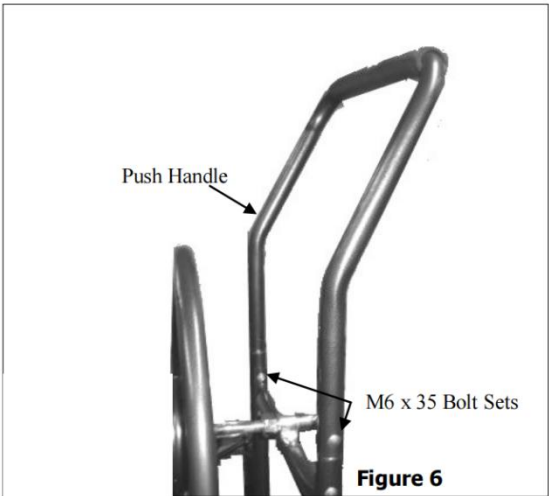


7. Attach basket to handle using (2) M6x35 bolt sets. See figure 7.

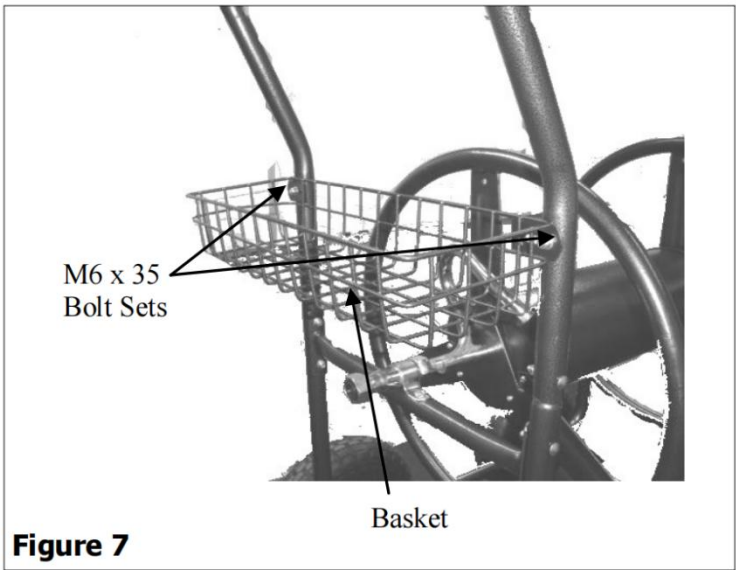

8. Insert rubber washers into hose extension and water coupler. See figure 8.

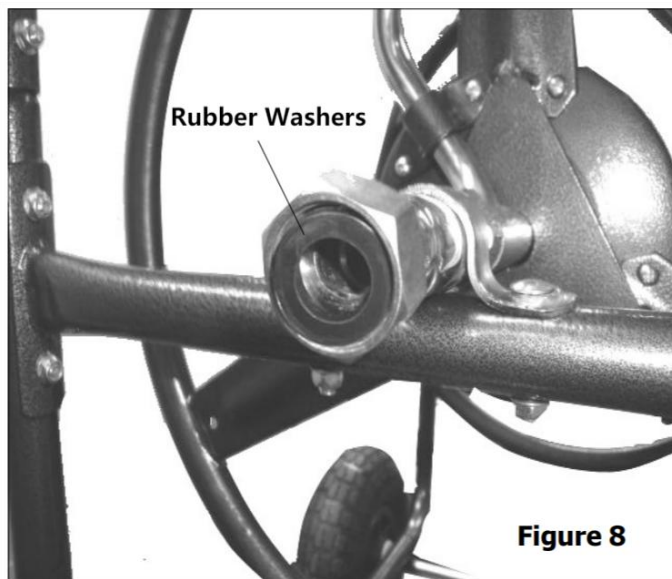

9. Attach hose extension to water coupler. See figure 9.

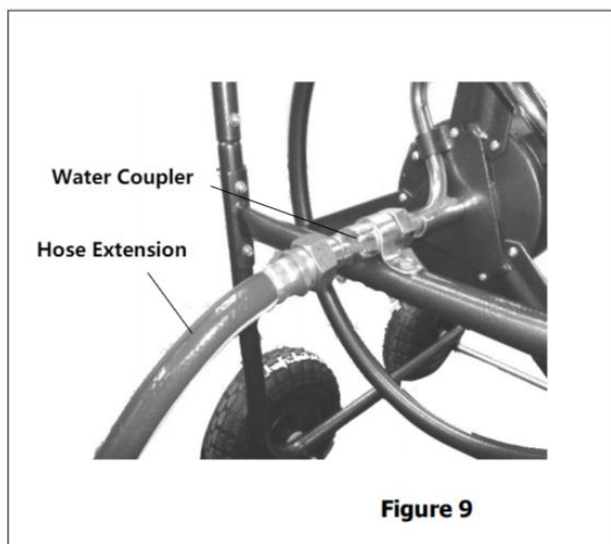

Connect the water pipe



Address: Baoshanqu Shuangchenglu 803long 11hao 1602A-1609shi
Shanghai

Imported to AUS: SIHAO PTY LTD, 1 ROKEVA STREETEASTWOOD
NSW 2122 Australia

Imported to USA: Sanven Technology Ltd., Suite 250, 9166 Anaheim
Place, Rancho Cucamonga, CA 91730

Made In China

VEVOR[®]

TOUGH TOOLS, HALF PRICE

Technical Support and E-Warranty Certificate

www.vevor.com/support