



MILTON AIR HOSE

Use & Care Guide

All **Milton Pneumatic Air Hoses** have been engineered to provide superior flexibility, are lightweight yet flexible, resists kinking, and lays flat. Unlike standard rubber air hoses, the Milton® air hoses are made from a hybrid polyvinyl chloride material, which is perfect for eliminating kinking and general wear and tear applications. This unique compressed air hose differs from the competition, as air hoses are fitted with sturdy solid brass hose ends as opposed to soft aluminum.

Milton Pneumatic Air Hoses are multipurpose air hoses that remain flexible down to -40°F/C and offer up to 300 PSI maximum working pressure while in use. **Milton Air Hoses** are designed for use with pneumatic air tools (pneumatic nailers, air impact guns, air wrenches, air grinders, etc) as well as automotive maintenance and other compressed air applications. **Milton Air Hoses** are UV, oil and abrasion resistant. This hose is great for everyday use in construction, automotive, industrial, agriculture and fleet applications. Unlike competitor air hoses, Lightweight **Milton Air Hoses** will not change color or fade when exposed to nature's elements. Available in various lengths and sizes, all **Milton Air Hoses** include bend restrictors on both ends to further prevent kinking and hose end deterioration.




HYBRID PVC AIR HOSE

Use & Care Guide

Care & Maintenance

- When cleaning your **Milton Air Hose**, use non-abrasive, non-bleach, solvent-free cleaners as this may reduce the life of your air hose
- Do not restrict movement of your air hose, or use as a substitute for air supply line
- Check air hose for wear before each use. Make sure all connections are secure and safe for operation
- Do not exceed manufacturer's maximum air pressure rating, or risk failure of product
- A longer air hose that extends beyond 25 feet or more has a tendency to have a drop of 15 psi in pressure. If this happens, it is ideal that the air pressure be regulated higher to compensate for drop in pressure at the tool (remember to never exceed the maximum pressure rating for the hose)
- To avoid tripping and accidental injury, always ensure to retract and store your air hose into a safe location out of high traffic areas

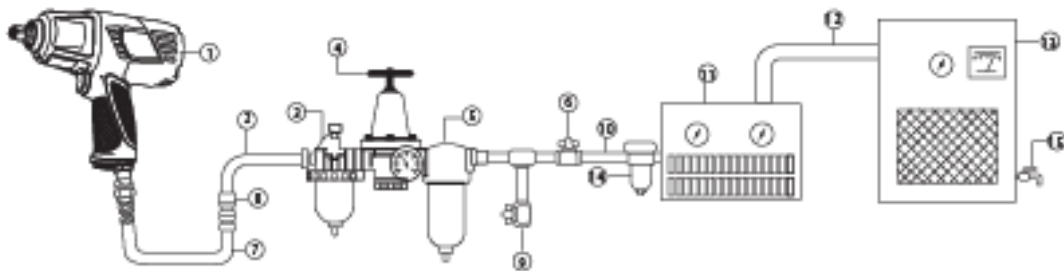

AIR SYSTEM LAYOUT :

- | | | |
|------------------------|-------------------------------------|-----------------------------------|
| 1. Air Tool | 6. Shut Off Valve | 11. Air Dryer |
| 2. COBRA FLEX Air Hose | 7. Whip Hose | 12. 1" or Larger Pipe and Fitting |
| 3. Lubricator | 8. Air Coupler Body and Plug | 13. Air Compressor |
| 4. Pressure Regulator | 9. Fluid Drain | 14. Overnight Auto Drain |
| 5. Micro Filter | 10. 1/2" or Larger Pipe and Fitting | 15. Drain Daily |



HYBRID PVC AIR HOSE

Use & Care Guide

LIMITED WARRANTY

Every Milton product is subject to a limited warranty, to the original purchaser only, to be free from defects in material and workmanship. Subject to certain exceptions referenced herein, Milton Industries Inc. will, at its option, replace or issue credit for a Milton product which, after examination, is determined by Milton to be defective in material or workmanship for a period of one (1) year after the date of purchase (certain Milton products carry a limited warranty of up to 3 years as indicated on that product). Milton customers must contact our Global Customer Service team to obtain an "RMA" (Returned Merchandise Authorization) form before sending any product back for credit or replacement. Return the product, copy of proof of purchase, and pre-approved "RMA" Number listed on the outside of the box to the Milton factory (address listed below), freight prepaid and insured. This limited warranty does not apply to damage Milton determines to be from repairs made or attempted by anyone other than Milton Industries Inc. authorized personnel, misuse, abuse, normal wear and tear, lack of maintenance, or accidents. Milton products which have been damaged due to being dropped, with a cracked or broken housing are considered misuse versus normal wear and tear and NOT covered under the terms of this limited warranty. Product deemed in need of replacement due to being 'worn out' and/or due to the product having 'reached its end of life' from high use application that would 'wear out' the product within course of one (1) year or less is excluded and NOT covered under the terms of this limited warranty.

THIS LIMITED WARRANTY IS EXCLUSIVE AND IS PROVIDED IN LIEU OF ALL OTHER WARRANTIES EXPRESSED OR IMPLIED. MILTON INDUSTRIES, INC., MAKES NO EXPRESS OR IMPLIED WARRANTY WHATSOEVER OF MERCHANTABILITY, FITNESS FOR ANY PURPOSE OR OTHERWISE. THE LIABILITY OF MILTON INDUSTRIES, INC., UNDER THIS LIMITED WARRANTY IS LIMITED TO THE REPLACEMENT OR ISSUANCE OF CREDIT FOR A DEFECTIVE PRODUCT AS DETAILED ABOVE, AND UNDER NO CIRCUMSTANCES SHALL MILTON INDUSTRIES, INC., BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL OR CONSEQUENTIAL DAMAGES OF ANY NATURE WHATSOEVER, INCLUDING, WITHOUT LIMITATION, LIABILITY FOR LOST PROFITS.

Milton Industries, Inc.
Attn: Warranty Returns
4500 W. Cortland St.
Chicago, IL 60639
(855)GO4-MILT
sales@miltonindustries.com