


USE AND CARE GUIDE

THREE PERSON FUTON SWING WITH RECLINERS

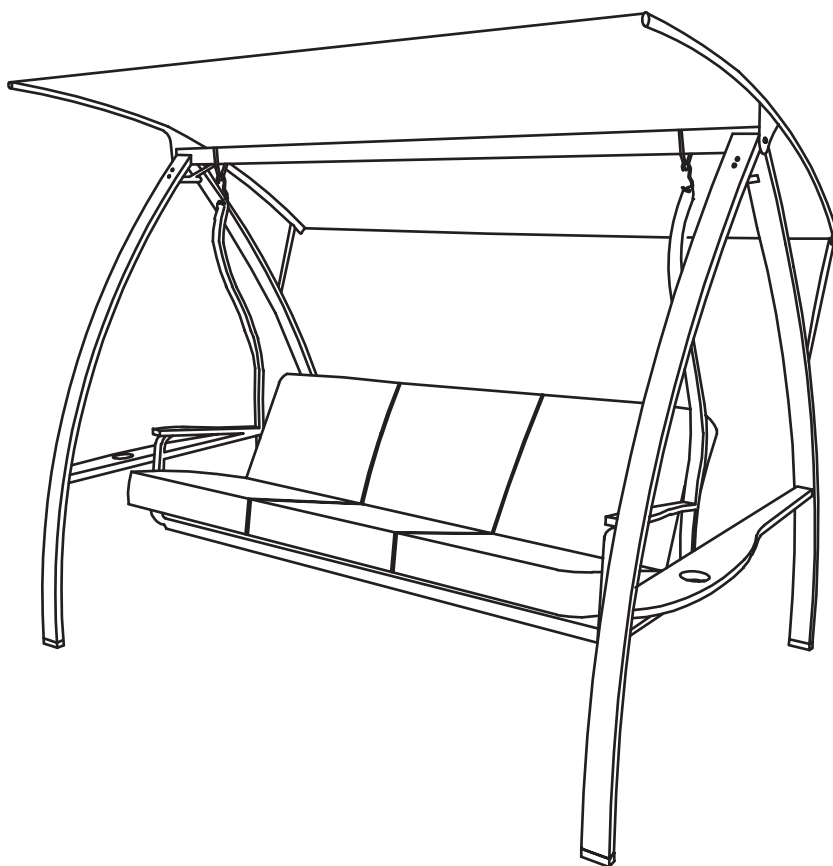

Questions, problems, missing parts? Before returning to the store,
call our Customer Service

THANK YOU

*We appreciate the trust and confidence you have placed through the purchase of this futon swing.
We strive to continually create quality products designed to enhance your home. Visit us online to see our full line of
products available for your home improvement needs. Thank you for choosing !*

Table of Contents

Table of Contents.....	2	Assembly	5
Safety Information.....	2	Care and Cleaning	8
Warranty.....	2		
Pre-assembly.....	3		
Planning Installation	3		
Tools Required	3		
Hardware Included.....	3		
Package Contents	4		

Safety Information

**WARNING:**Protective eyeglasses are recommended during assembly.

**WARNING:**Two or more people are needed to assemble the swing and to move the swing.

**WARNING:**Assemble and place the swing at least 6 ft. away from any obstructions,such as fences,walls,grills, tree branches,and electrical wires.

**WARNING:**Tighten all nuts, bolts, and components during assembly and periodically during use.

**WARNING:**Use proper caution when swinging. Gentle swinging is recommended. Do not leave young children alone on the swing.

**WARNING:**Maximum weight capacity of the swing is 600 lbs.

**CAUTION:** Assemble and locate the swing on level ground.

**CAUTION:** Lubricate all moving parts during periods of use.


Pre-assembly

PLANNING ASSEMBLY


Check the product package to ensure all hardware and package contents are included.

Please read all instructions thoroughly before assembling the swing.


TOOLS REQUIRED



M6 Allen Wrench
(#1)(Included)



M8 Allen Wrench
(#2)(Included)



Hex Wrench X2
(#3)(Included)

HARDWARE INCLUDED




NOTE: Hardware not shown to actual size.




AA




BB



CC



DD



EE



FF



GG




HH



II



JJ




KK

Part	Description	Quantity
AA	Bolt M8×15 Round Head	8
BB	Bolt M8×15 Hex Head	8
CC	Bolt M8×40	8
DD	Bolt M8×45	2
EE	Bolt M8×50	2
FF	Bolt M6×15	8
GG	Bolt M6×25	2
HH	Locknut	10
II	M6 capnut	4
JJ	Plastic washer	8
KK	Plastic caps	30

Pre-assembly (continued)

PACKAGE CONTENTS

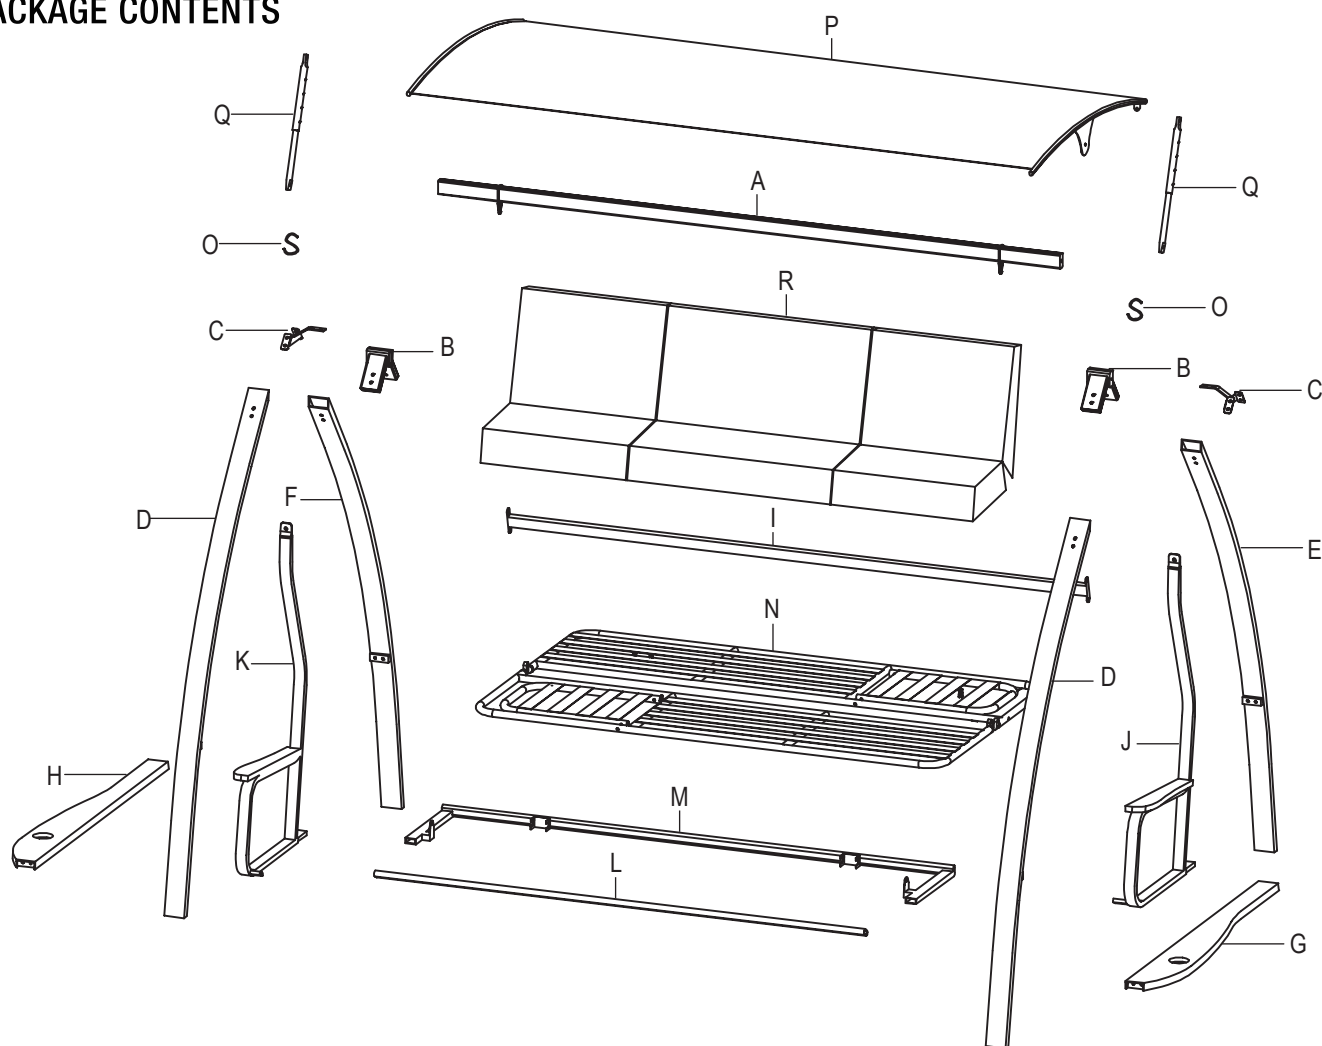


Part	Description	Quantity
A	Top cross bar	1
B	Joint part	2
C	Bracket	2
D	Front leg tube	2
E	Left back leg tube	1
F	Right back leg tube	1
G	Left side table	1
H	Right side table	1
I	Rear stabilizing bar	1

Part	Description	Quantity
J	Left swing arm & armrest	1
K	Right swing arm & armrest	1
L	Front seat cross bar	1
M	Rear seat cross bar	1
N	Seat & back frame	1
O	Hook	2
P	Canopy	1
Q	Canopy adjustment tube	2
R	Seat cushion	1


Assembly

1. Assembling the Metal Structure

- Insert the top cross bar (A) into the joint part (B).
- Insert the joint part (B) into the front leg tube (D), left back leg tube (E) and right back leg tube (F).

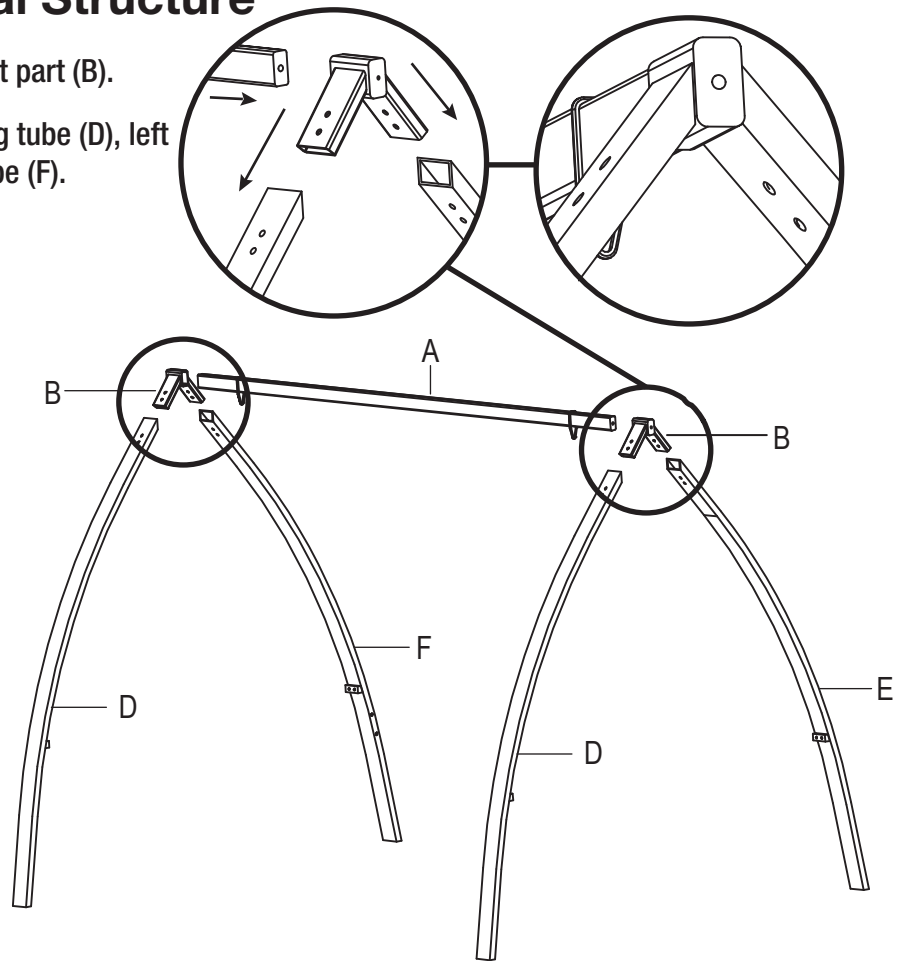


- Attach the bracket (C) to the top cross bar (A) with M8x15 bolts hex head (BB) and plastic caps (KK).
- Attach the bracket (C) to the front leg tube (D), left back leg tube (E) and right back leg tube (F) with M8x40 bolts (CC), locknut (HH), and plastic caps (KK).

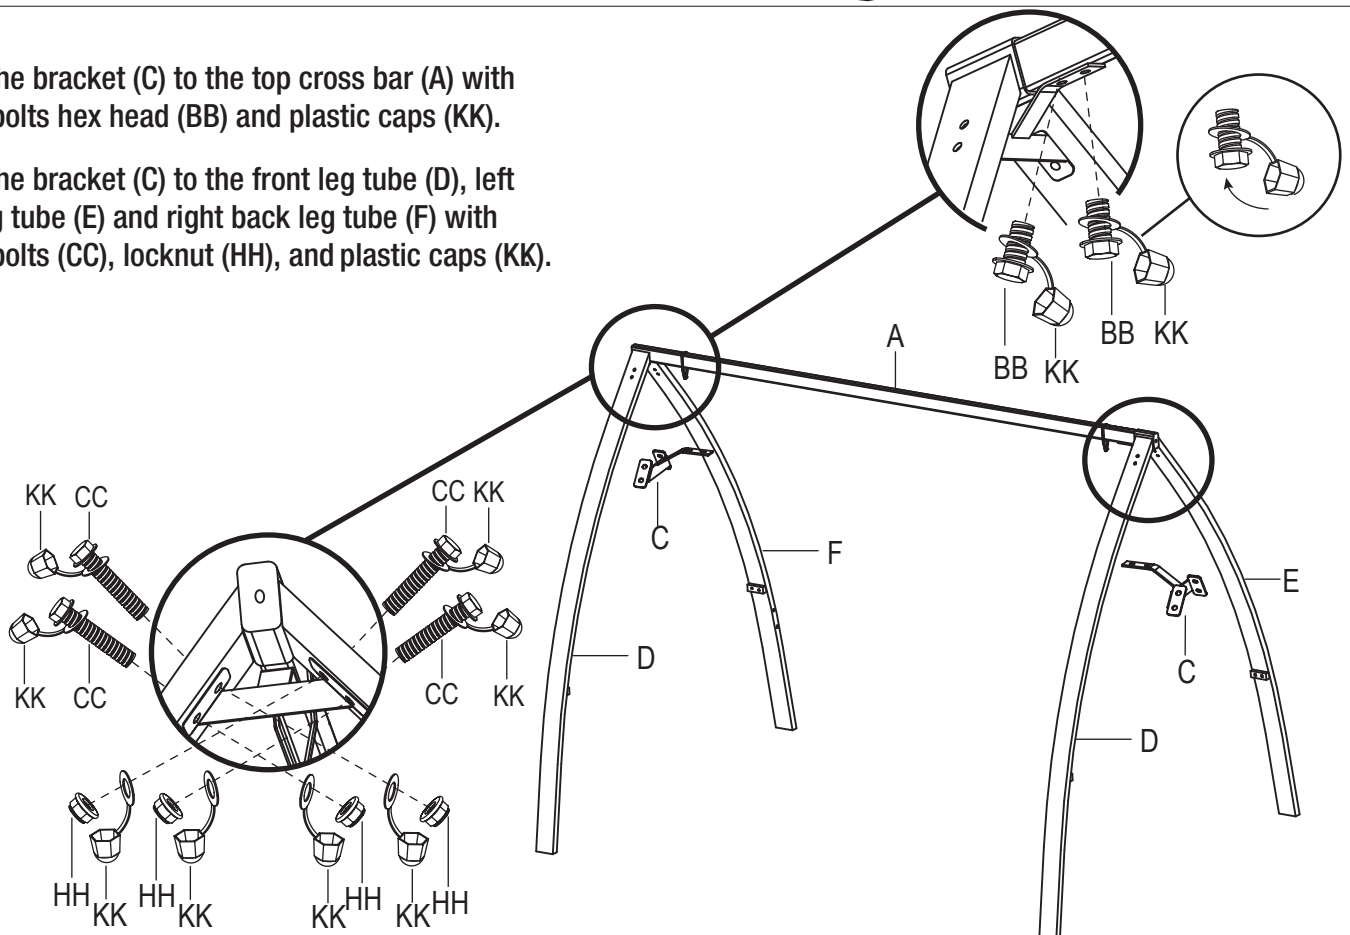


Assembly (continued)

- Attach the rear stabilizing bar (I) to the left back leg tube (E) and right back leg (F) with M8x15 bolts hex head (BB) and plastic caps (KK).
- Attach the Left side table (G) to the front leg tube (D) and left back leg tube (E) with M8x15 bolts round head (AA).
- Attach the right side table (H) to the front leg tube (D) and right back leg tube (F) with M8x15 bolts round head (AA).

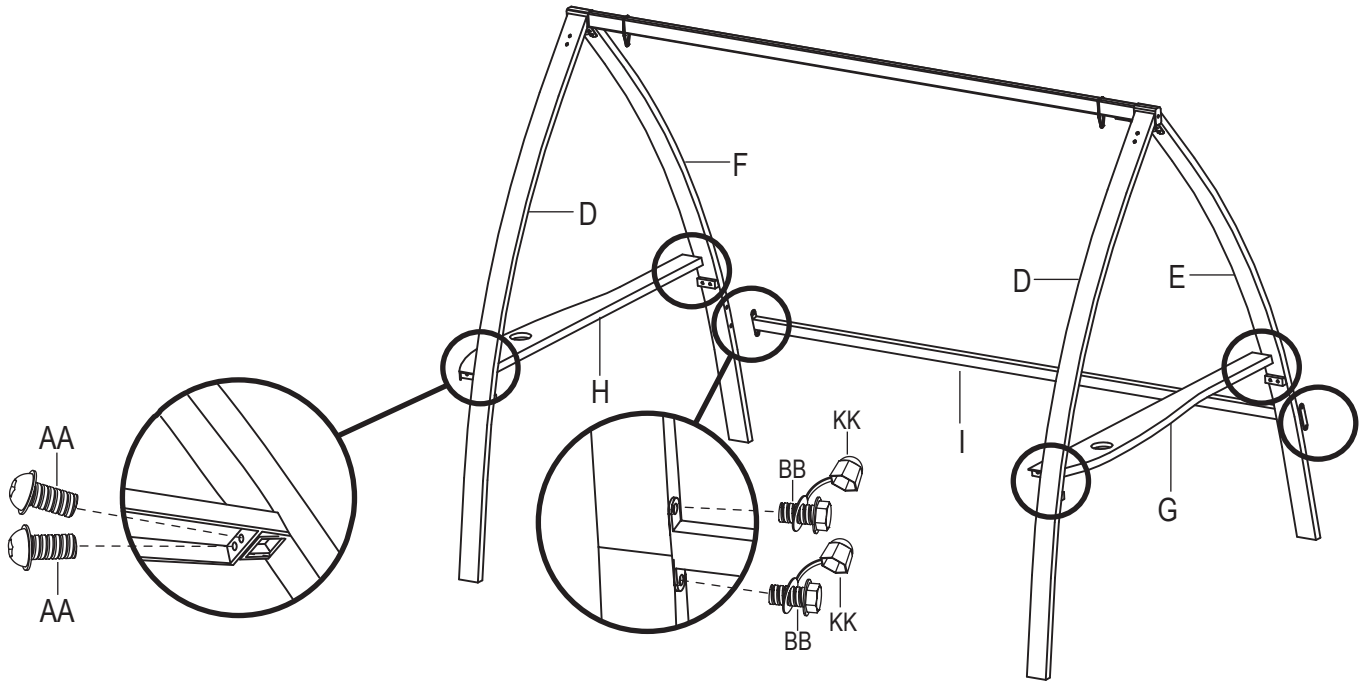

2. Assembling the Swing Arm


- Attach the front seat cross bar (L) to the left swing arm & armrest (J) and right swing arm & armrest (K) with M6x25 bolts (GG) and M6 capnut (II).
- Attach the Rear seat cross bar (M) to the left swing arm & armrest (J) and right swing arm & armrest (K) with M6x15 bolts (FF).

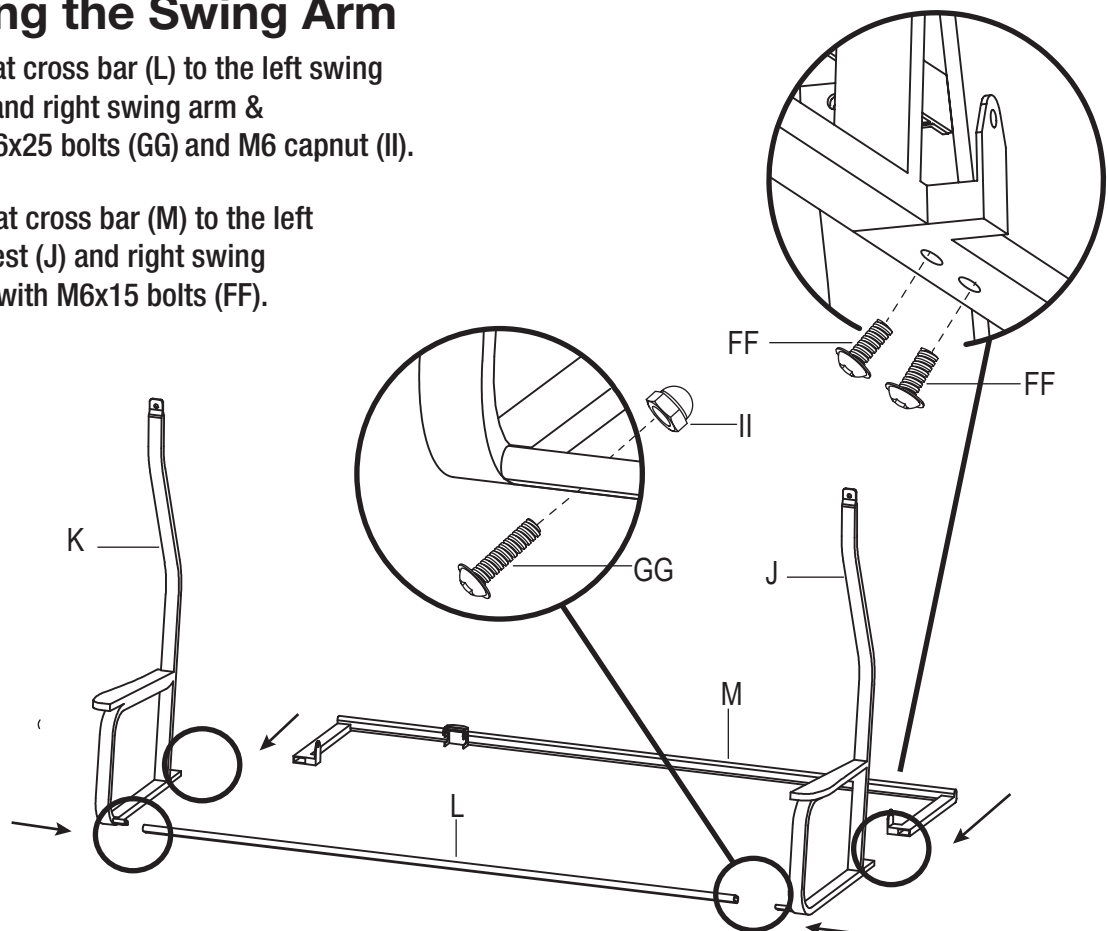


Assembly (continued)

3. Assembling the Seat

- Attach the seat and back frame (N) to the left swing arm & armrest (J) and right swing arm & armrest (K) with M8x45 bolts (DD), plastic washers (JJ), locknut (HH) and plastic caps (KK).

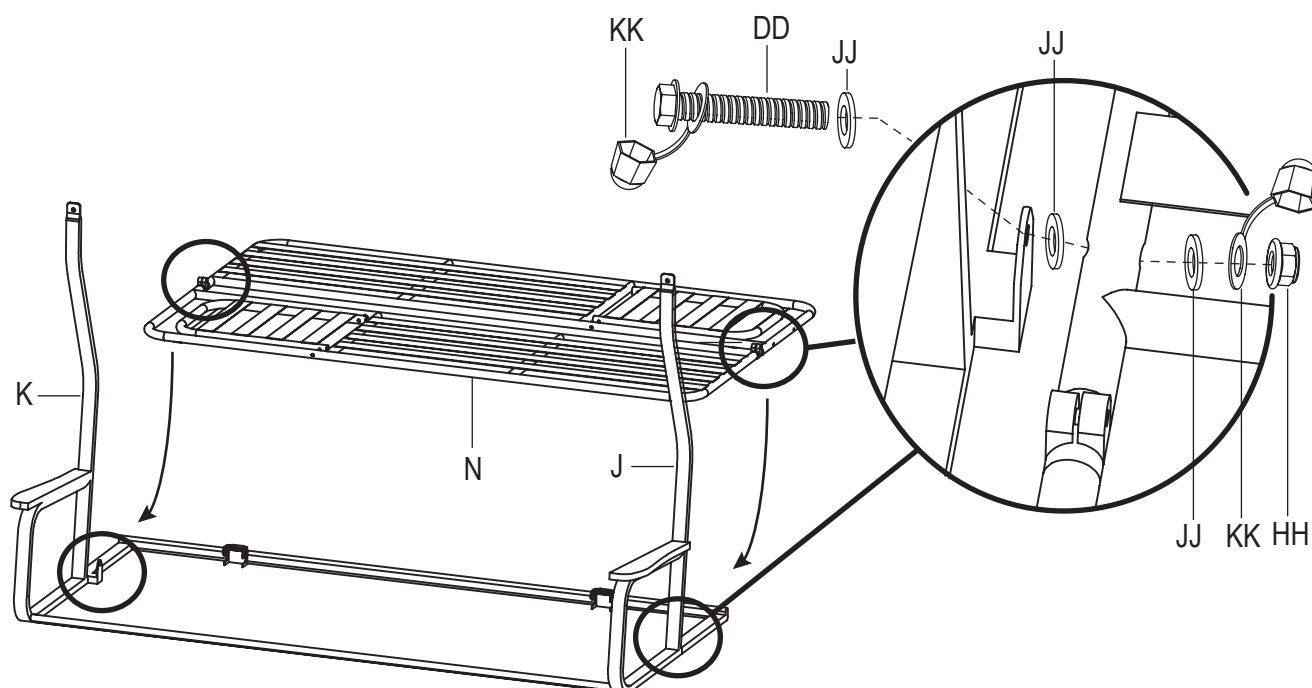


- Set the hook (O) into the holes on the left swing arm & armrest (J) and right swing arm & armrest (K).
- Set the hook (O) into the holes on the top cross bar (A).

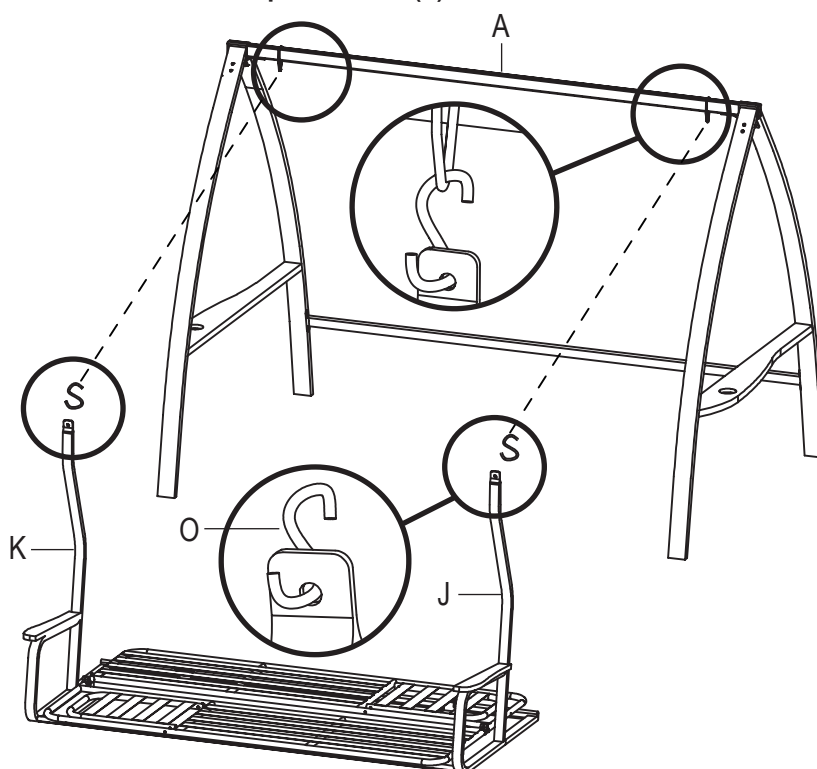

Assembly (continued)


4. Assembling the canopy

- Attach the canopy (P) to the top cross bar (A) with M8x50 bolts (EE), plastic washers (JJ) and plastic caps (KK).

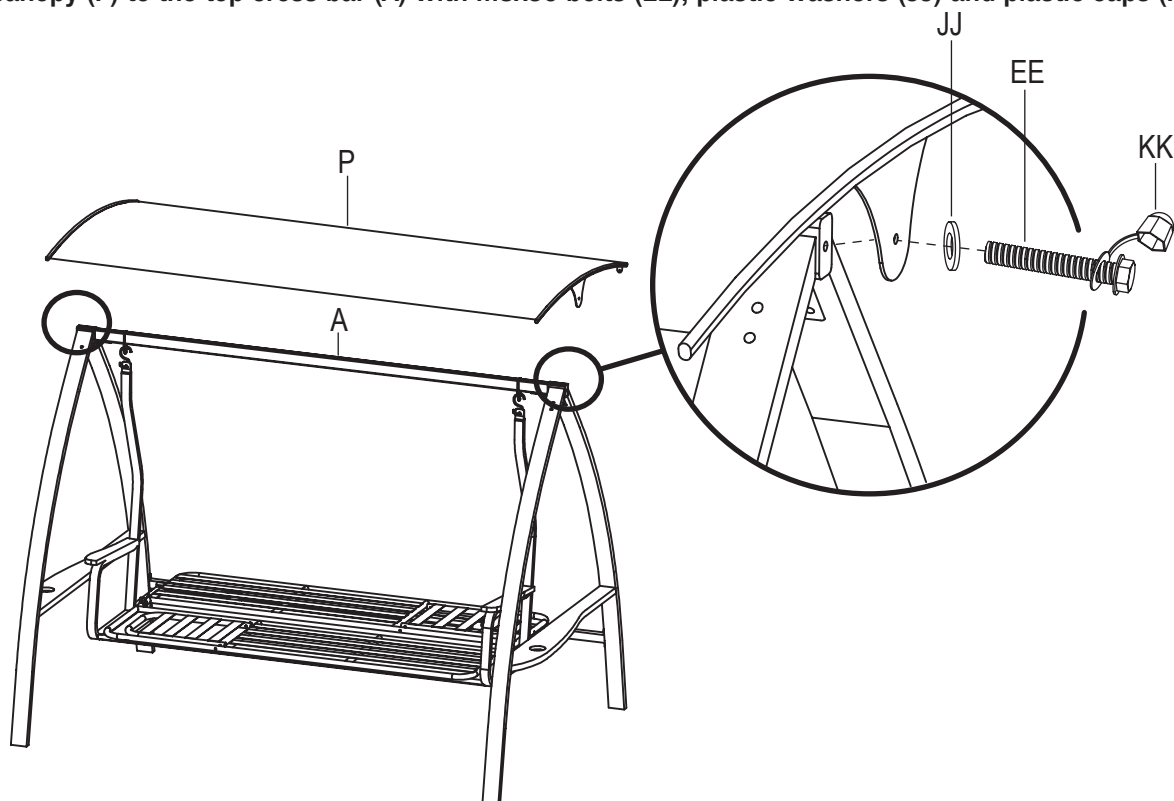


- Attach the canopy adjustment tube (Q) to the canopy (P) with M6x15 bolts (FF) and M6 capnut (II).

- Attach the canopy adjustment tube (Q) to the back leg tube (E&F) with M6x15 bolts (FF).

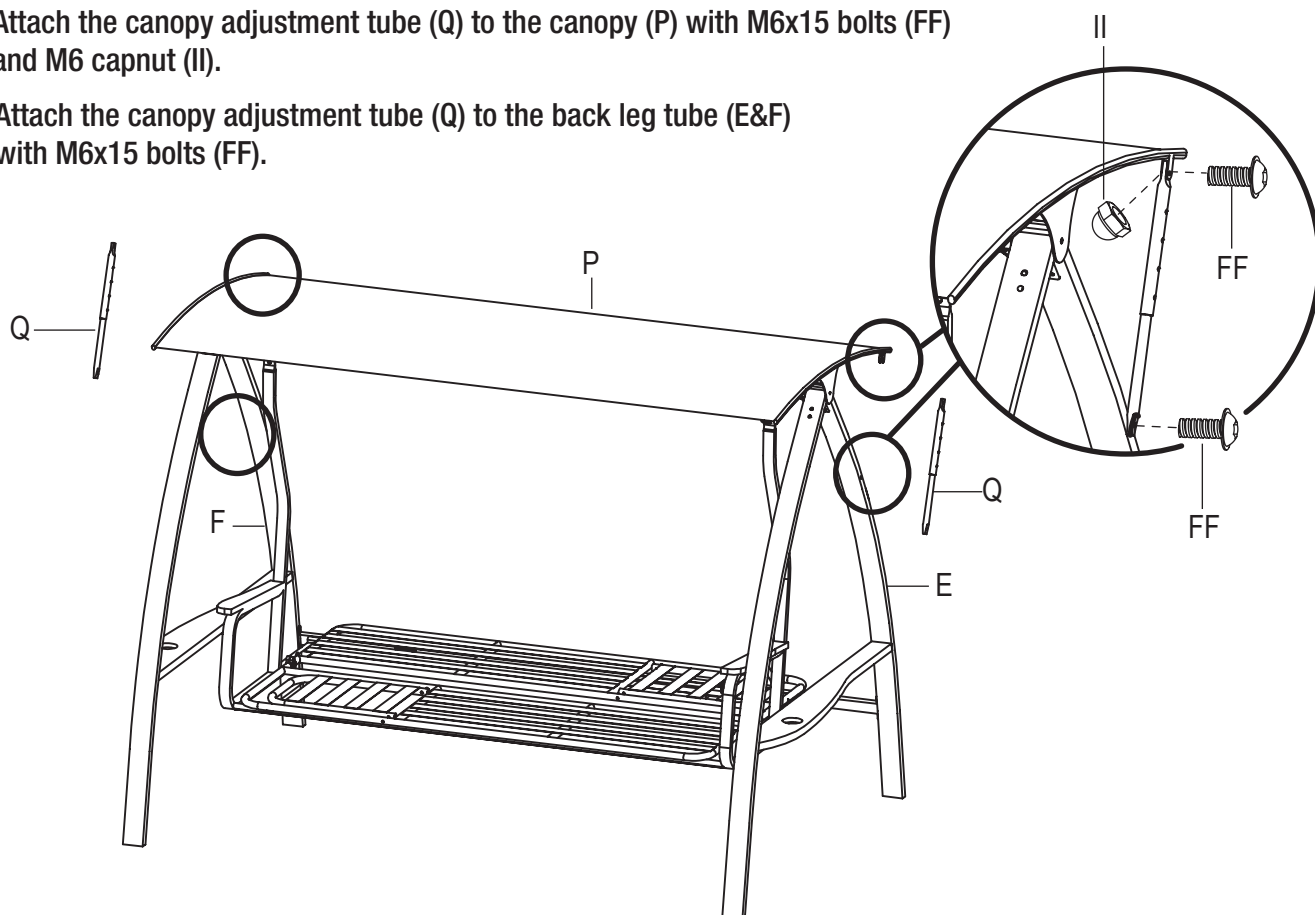


Assembly (continued)

- Push the pin on the canopy adjustment tube (Q) adjust the canopy angle.

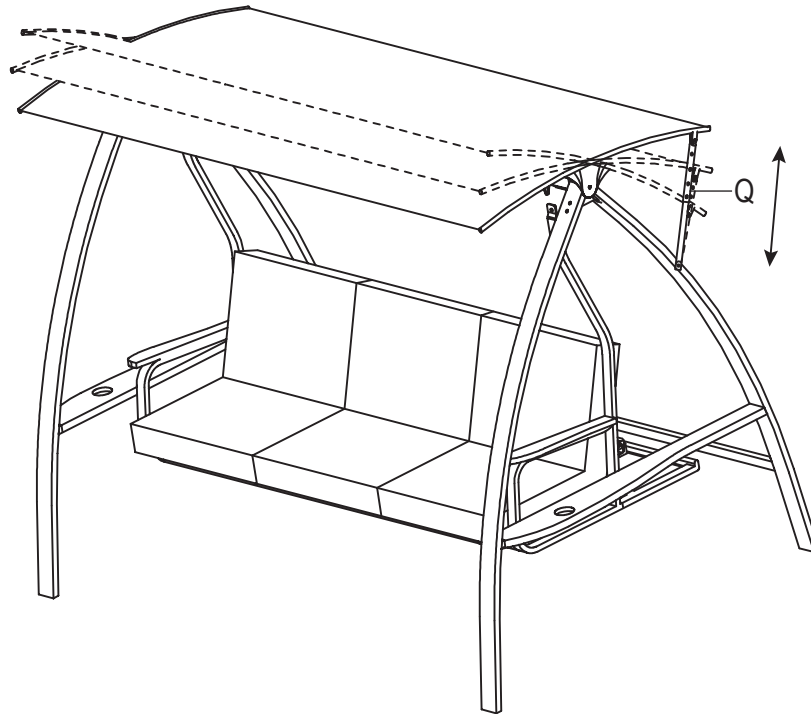

5.Installing the Cushion

- Lay the cushion (R) on the seat frame (N).
- Make sure that the safety latches are in the lock position when the seat is used in the upright position.
- Secure the velcro straps.

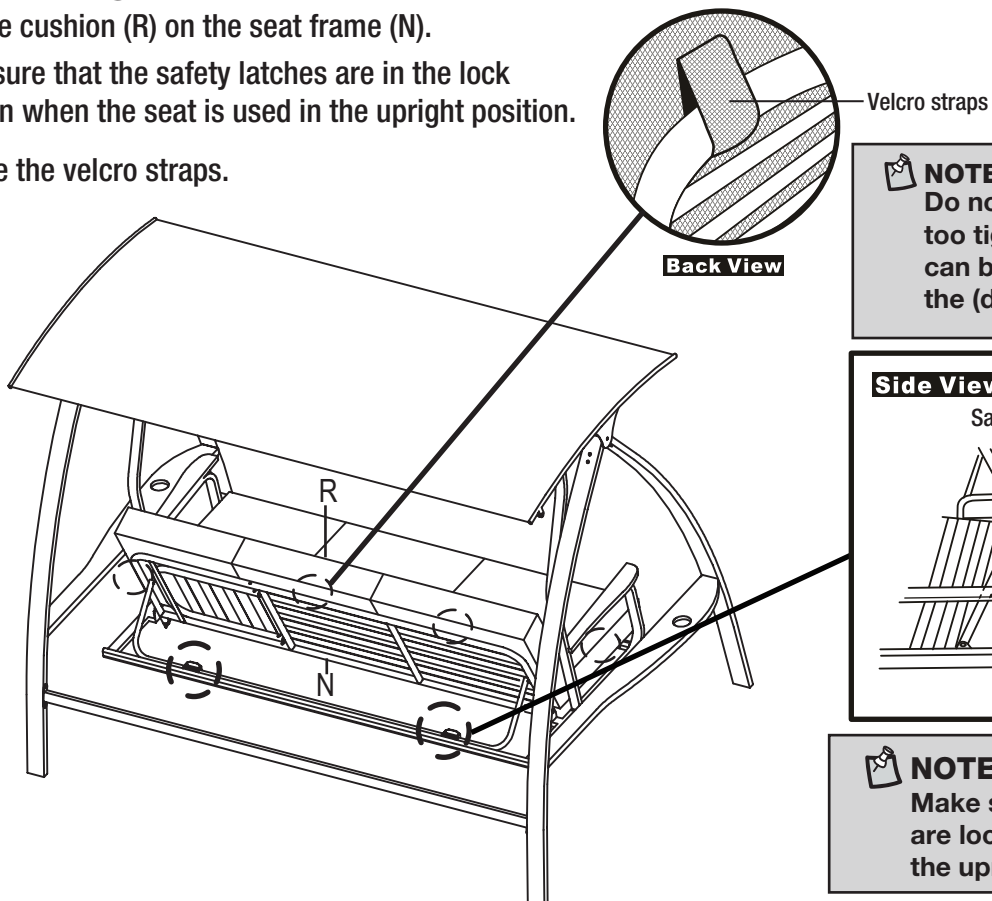


NOTE

Do not secure the velcro straps too tight so that the seat frame can be easily converted to the (daybed) position.

Side View

Safety latches

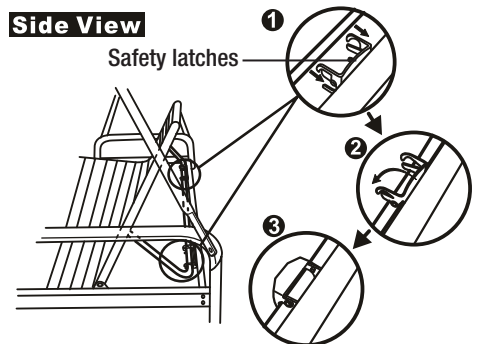



NOTE

Make sure that the safety latches are locked when the backrest is in the upright position.

Assembly (continued)

6. Stabilizing the Swing When Converting to Daybed

- Unlock the safety latches and lower the seat to the daybed position, make sure the top of the safety latch is laying flat.
- After laying the daybed down
 - Stabilizing the back and seat frame using the curved hooks on the rear seat cross bar (M) on each side. - very important
 - To keep the daybed from swinging insert the long L-shape hook on the rear seat cross bar (M) into the holes located on the rear stabilizing bar (I).

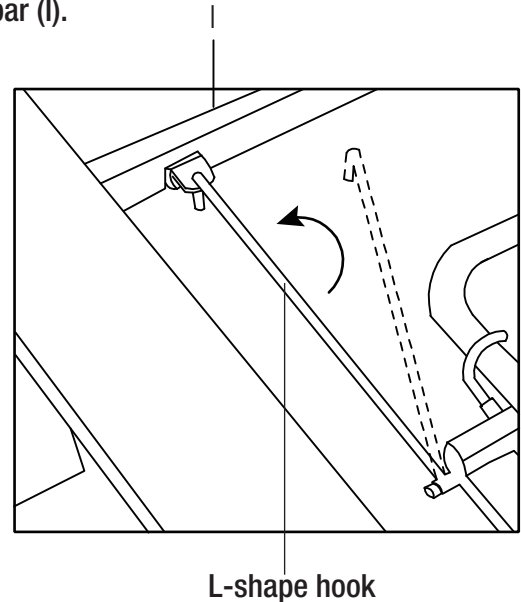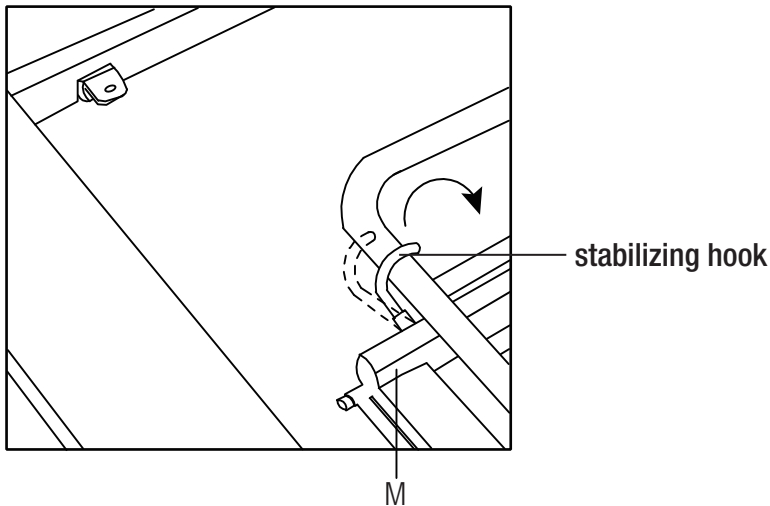

7. Using the Recliner


- Once the swing is secured in the daybed position, pull up the seat and cushion to secure the velcro straps.



Back View

NOTE

Do not secure the velcro straps too tight so that the reclining seats can be easily pulled up.



NOTE

To adjust the recliner for use, pull up the reclining bar to the desired position. Make sure it automatically locks in place.
To release the recliner, raise the recliner to the highest possible position, then slowly lay the seat to the flat position.

Retain this manual for future use.