


OPERATION INSTRUCTIONS:

Visit hydrotechproducts.com/getstarted for How to Videos

ASSEMBLING HOSE TO FAUCET OR SPIGOT

IMPORTANT: Complete the steps below before running water through the hose for the first time.

1. Remove the FLATJACKET™ Hose from the package and set on the ground. Pick up inside loop and walk to fully extend hose. **Completely unwind the coiled hose.**
2. Attach any spray nozzle or sprinkler to the aluminum fitting on the garden hose.
3. Attach the nylon connector on the garden hose to the spigot. (Extra rubber washer is included)
4. Turn on the spigot from your home's water supply to the garden hose.

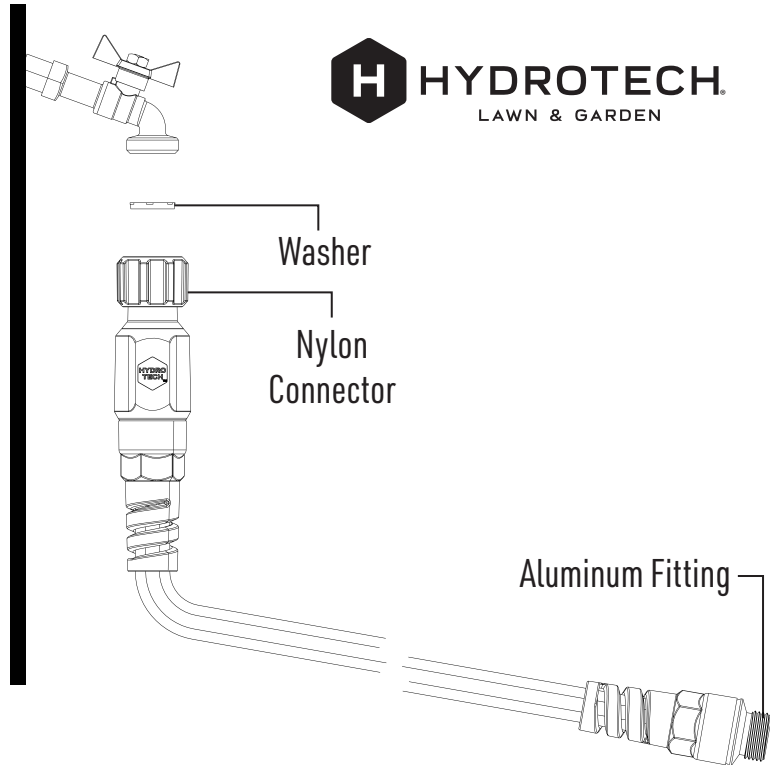

Operating pressure should be at least 60 PSI for maximum performance.

IMPORTANT INFORMATION:

STORING YOUR GARDEN HOSE

FLATJACKET hoses can be stored using any garden hose reel, storage box or pot.

To extend the life of your hose:

1. Do not store in direct sunlight or in extreme heat.
2. Do not leave hose outside in freezing temperatures, store indoors in the winter.
3. Empty any remaining water before storing.

⚠ WARNING

- Keep out of reach of children and pets.
- Strangulation hazard. Hose wrapped around neck may cause serious injury or death.
- Improper use of this product may cause serious injury or death.
- DO NOT attempt to disassemble the hose. Any attempt to disassemble the hose may cause the hose to function improperly or may cause injury or death.
- Although this hose is drinking/potable water safe, the water in ANY garden hose may become contaminated and cause serious health effects. Use caution if consuming water from a garden hose.