

DESCRIPTION

- Includes handshower, hose, and bracket
- Spot Resist Brushed Nickel finish
- 60" double interlock spiral chrome hose (metal)
- 1/2" IPS connection

OPERATION

- Six functions
- Rotate outer ring to select function

FLOW

- Designed to deliver 1.75 gpm (6.6 L/min) MAX at 80 psi
(for models manufactured after 3/1/18)
- Designed to deliver 2.0 gpm (7.6 L/min) MAX at 80 psi
(for models manufactured before 3/1/18)


STANDARDS

- Third party certified at WaterSense®, ASME A112.18.1/CSA B-125.1, and all applicable specifications referenced therein
- Products marked with 1.75 gpm are compliant with California water efficiency regulations

WARRANTY


- Lifetime limited warranty against material or manufacturing defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation

Visit www.moen.com/support for the complete details and limitations

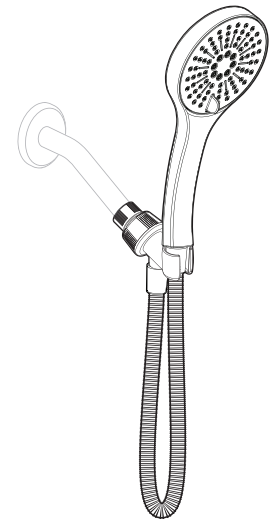

Iso™
6-Function Handshower
with Bracket & Hose

Models: 26056SRN

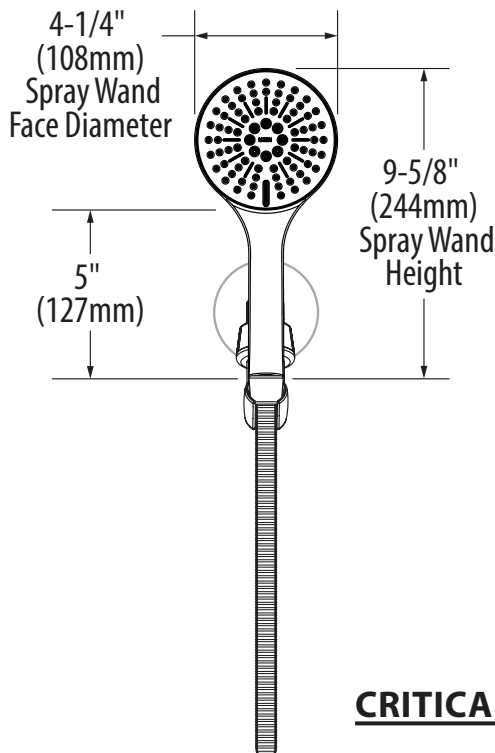

CRITICAL DIMENSIONS

(DO NOT SCALE)

