



THE SPEC LINE
WHAT THE JOB DEMANDS.®

920

Premium Exterior Elastomeric Sealant

Meets ASTM C920

WHAT'S YOUR JOB?

- SIDING
- WINDOWS
- DOOR
- TRIM

THE SPECIFICATION

Meets ASTM C920 - Standard Specification for Elastomeric Joint Sealants


THE PRODUCT

DAP® DYNAFLEX® 920 Premium Exterior Elastomeric Sealant is a high performance, elastomeric sealant developed for professional siding and window installations.

It provides a long lasting elastomeric seal which helps prevent water and air intrusion.

- All Weather Application
- No Cracking
- Primerless Adhesion
- Paintable
- 100's of colors available
- 4" spout for easy application

Color On The Tube

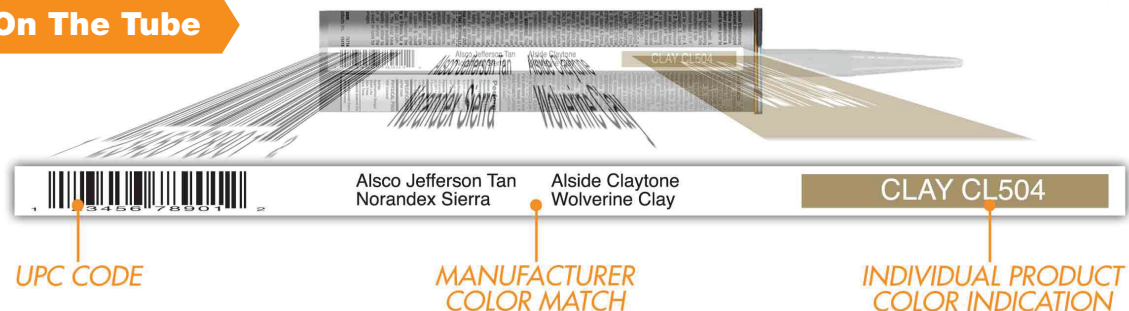

Premium Exterior Elastomeric Sealant

Meets ASTM C920

LIMITED WARRANTY: DAP Products Inc. warrants that this product, when applied in accordance with DAP's label, technical bulletins and applicable industry standards, will be free from defects in material for 12 months from the date of purchase, but makes no warranty as to appearance or color. Since methods of application and on-site conditions are beyond DAP's control and could affect performance, DAP makes no other warranties, express or implied, including the warranties of **Merchantability or Fitness for a Particular Use or Purpose**. If a product defect is encountered, call 1-888-DAP-TIPS for warranty fulfillment. You must have your sales receipt and product container available when you call. DAP's sole liability is either to supply replacement product or refund the purchase price. DAP will in no event be liable for incidental or consequential damages.

QUESTIONS? Call 888-DAP-Tips or visit dap.com & Click on "ASK the Expert"

Performance Facts

Amount per Cartridge:	296 mL (10 fl oz)
Recommended Bead:	1/4" to 3/8"
Coverage per Cartridge:	1/4" bead, 30.5 linear ft 3/8" bead, 13.5 linear ft

Recommended Use: Exterior siding, windows, doors & trim where a durable aesthetic seal is required.

Not Recommended For: Interior use; below water line or below grade applications; butt joints less than 1/4" wide or joints exceeding 1/2" wide x 1/2" deep.

Features: Adheres to Wet Surfaces • Washout Resistant
• Extreme Flexibility • Applies at Temperatures as Low as 20°F • Self Tooling • VOC Compliant • Paintable
• Excellent UV Resistance

Adheres To: Vinyl • PVC • Aluminum • Metal
• Fiber Cement • Masonry • Wood • Most Common Building Materials

SPECIFICATIONS:

ASTM C920 Meets or Exceeds
Type S, Grade NS, Class 25, Use NT, M, A & O

PHYSICAL PROPERTIES:

VOC Content:	66 g/L CA ARB <4% 1.5% wt/wt (NCCS)
Solids:	63%
Application Range:	20°F to 120°F
Shelf Life:	24 months
Skin Time:	5 minutes
Cure Time:	7 to 14 days

Uncured Sealant Clean-Up: Mineral Spirits (Do not use to clean skin)

Cured Sealant Clean-Up: Cut or Scrape
Will Not Freeze

Case Code	Size	Color	Product Code	Case Weight (lb)	Case Pack	Case Dimensions (LxWxH)	Case Volume (cu ft)	UPC Check Digit	Cases per Pallet
89200	10 oz	WHITE	89200	13	12	8x6x12.5	0.35	2	132
89202	10.1 oz	CLEAR	89202	9.4	12	8x6x12.5	0.35	6	108
*N/A	10 oz	*COLORS	*N/A	13	12	8x6x12.5	0.35	*N/A	132

* For updated additional 920 SKU colors refer to www.dap.com