




# INSTRUCTIONS FOR INSTALLING CAFE DOOR GRAVITY HINGE SET

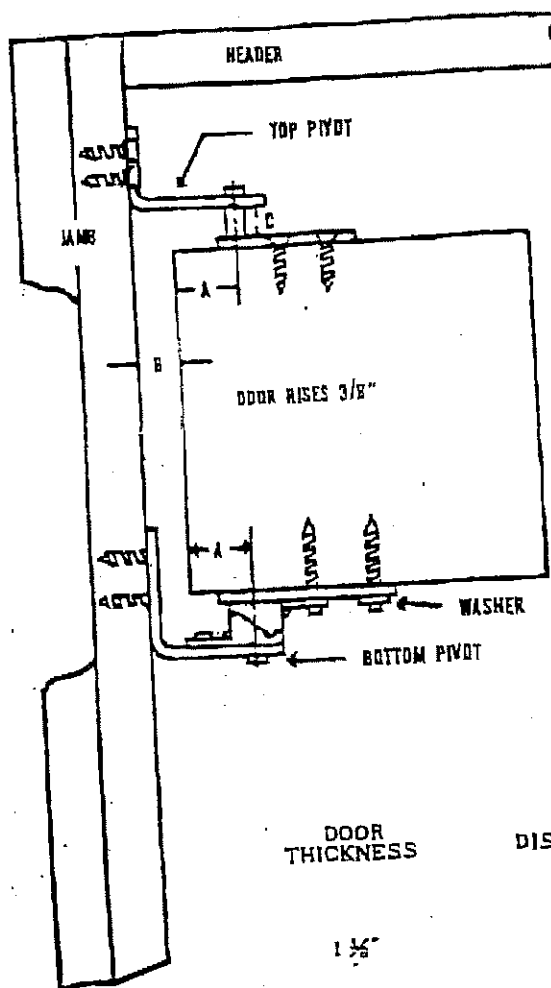

## STEP 1:

Attach top and bottom door plates, making certain they are centered in door. Locate distance "A" in chart "A" according to door thickness. This will provide proper swing clearance at "B". Insert screw in center of slotted hole of bottom door plate.

## STEP 2:

Mount bottom jamb bracket.

## STEP 3:

Place door on bottom pivot with the door closed. Slip top jamb bracket over pin of door bracket, then mark and mount top jamb bracket plumb with bottom jamb bracket. Space "C" must be no less than  $\frac{3}{4}$ " for the door to swing properly.

## STEP 4:

Align door by adjusting screw in bottom door plate.

## NOTE:

A swinging clearance of no less than  $\frac{1}{4}$ " between doors is required.

DOOR  
THICKNESS

$1\frac{1}{2}$ "

DISTANCE "A"

$\frac{3}{16}$

DISTANCE "B"

$\frac{3}{16}$