

2in & 2.5in Fauxwood Cordless Blinds Installation Instructions




Package Contents

2.5 in. Fauxwood Blinds Include Crown Valance & Ends (DD)



2 in. Fauxwood Blinds Include Deluxe Valance & Ends (DD)

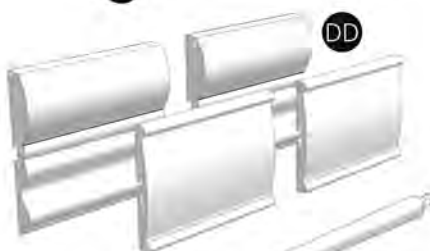

Note: Depending upon your purchase, your package will contain a complete Crown Valance (for 2.5 in. blinds) or a complete Deluxe Valance (for 2 in. Blinds).

BB

EE





Hardware Pack

Name

Quantity

AA	Faux Wood Blind	1
BB	Tilter Wand	1
CC	Valance	1
DD	Valance Ends	2
EE	Hardware Pack	1

Hardware Pack Contents

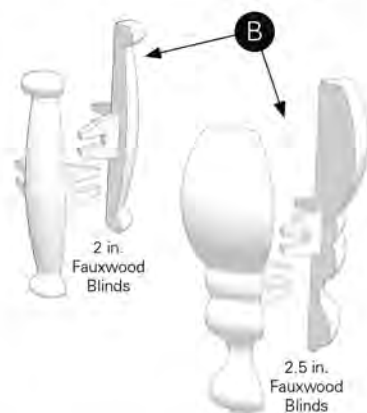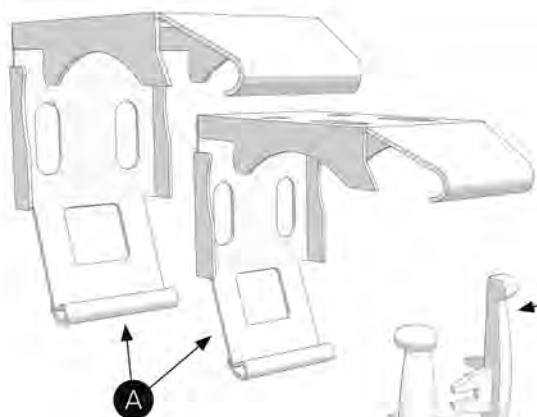

Name

Quantity*

A	Mounting Brackets	2 - 5*
B	Valance Corner Connectors	2
C	Phillips Head Screws +	4 - 10*
D	Screw Anchors	4 - 10*
E	Valance Clips	2 - 5*
F	Tilter	1

Tools Required:

Measuring tape or ruler
Pencil
Phillips head screw driver +
Drill

Note:

If mounting in drywall or plaster wall, use the provided plastic screw anchors (D).

* Quantities will change with size of shade.

Inside or Ceiling Mount Installation Instructions


Step 1 - Inside Mount - Install Mounting Brackets

Pencil mark the mounting screw holes then pre-drill holes for mounting screws.

With mounting brackets (A) level and flush with the window frame or ceiling, use the provided Mounting Screws (C) and screw through the top of the Mounting Brackets (A) and tighten.

Note: If mounting to a drywall or plaster wall, use the provided plastic screw anchors (D).

Note: It is important to position the mounting brackets where they will not interfere with the function of the internal parts of the headrail assembly.


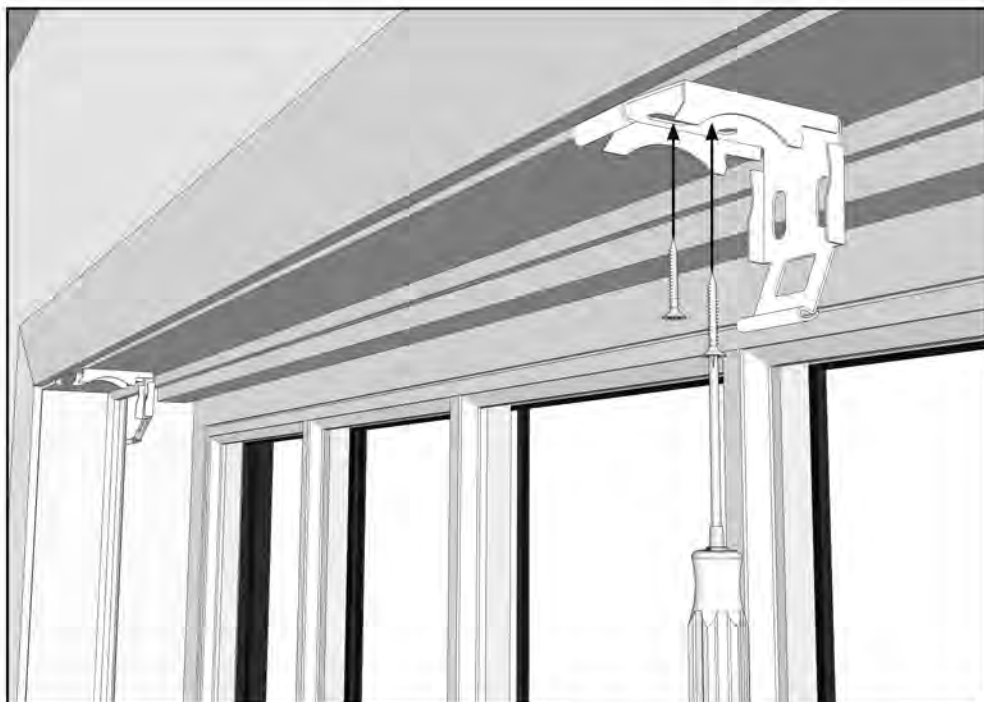


Step 2 - Inside Mount - Attach Valance Clips And Hang Shade

Before hanging shade (AA), attach the valance clips (E) by pressing them downward onto the headrail assembly. You will not be able to attach the clips once the shade is installed, so they must be attached prior to hanging the shade. See fig. (a).

Insert the top front groove of the headrail assembly into the upper holding clip of the mounting brackets.

Rotate the headrail assembly until the back of the headrail snaps and locks into the mounting brackets (a).

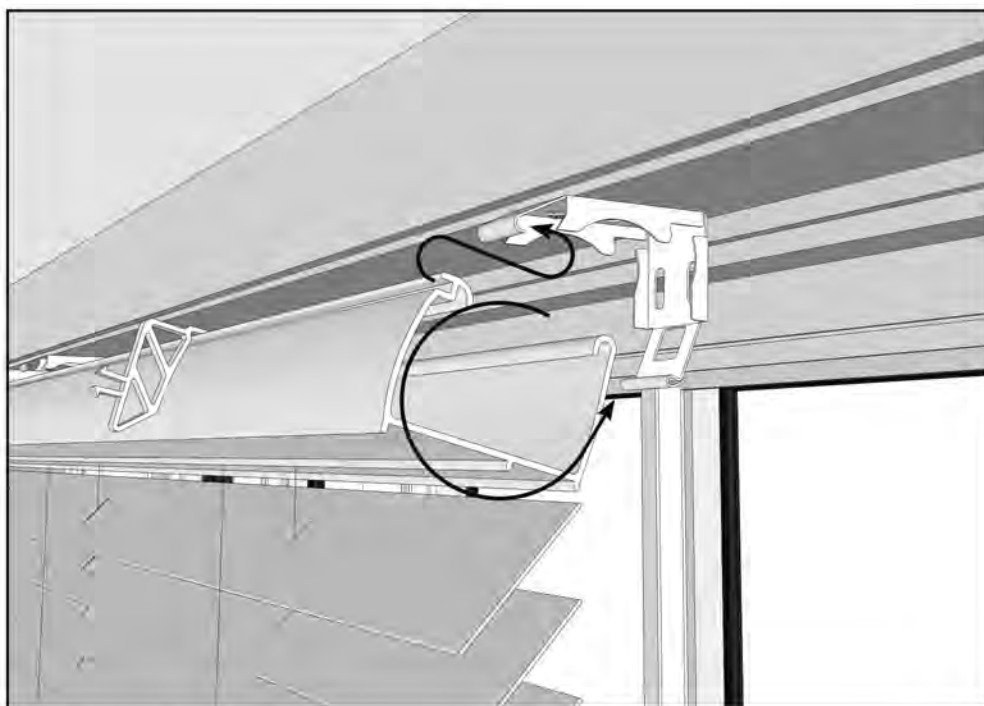
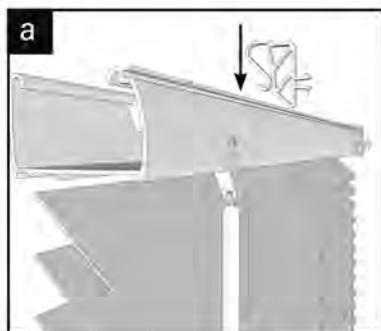


Inside or Ceiling Mount Installation Instructions (continued)

Step 3 - Inside Mount - Attach the Tilter and Control Wand


Insert the Tilter (F) into the tilt control mechanism in the headrail assembly by aligning and pushing into the unit until it clicks and locks into place.

Place the hook at top of Tilter Control Wand (BB) through the hang hole in the Tilter (F).

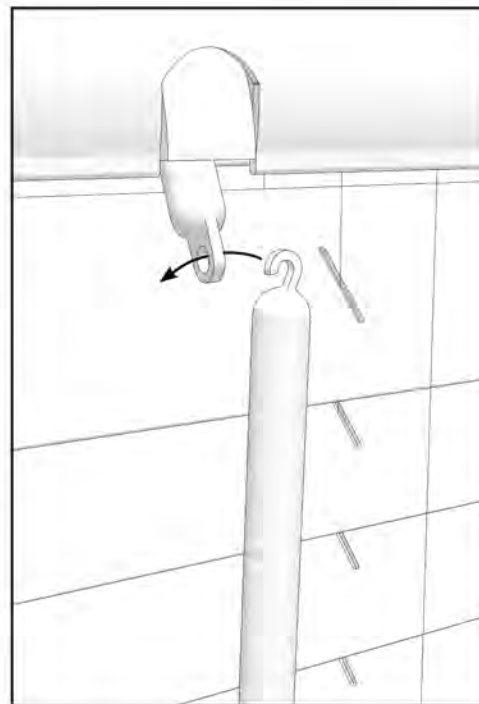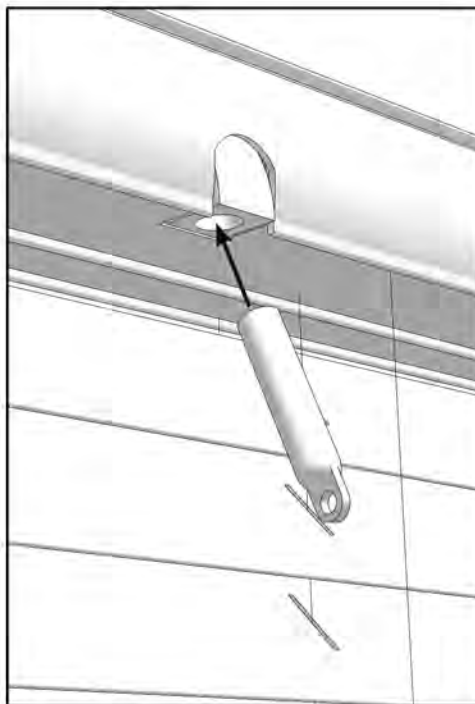

Step 4 - Inside Mount - Attach Valance (Optional)

Align the groove on the back of the Valance (CC) with the Valance Clips (E) and push back on valance (CC) until it snaps onto the Valance Clips (E).

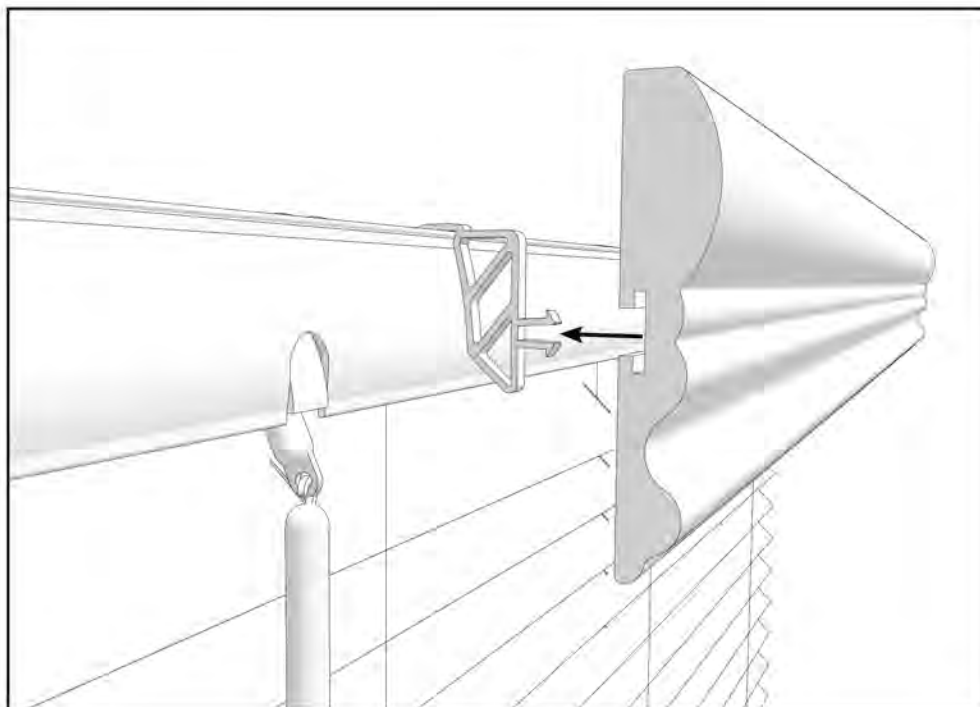

Outside Mount Installation Instructions


Step 1 - Outside Mount - Install Mounting Brackets

Pencil mark the mounting screw holes then pre-drill holes for mounting screws.

With mounting brackets (A) level and flush with the window frame or ceiling, use the provided Mounting Screws (C) and screw through the back of the Mounting Brackets (A) and tighten.

Note: If mounting to a drywall or plaster wall, use the provided plastic screw anchors (D).


Note: It is important to position the mounting brackets where they will not interfere with the function of the internal parts of the headrail assembly.

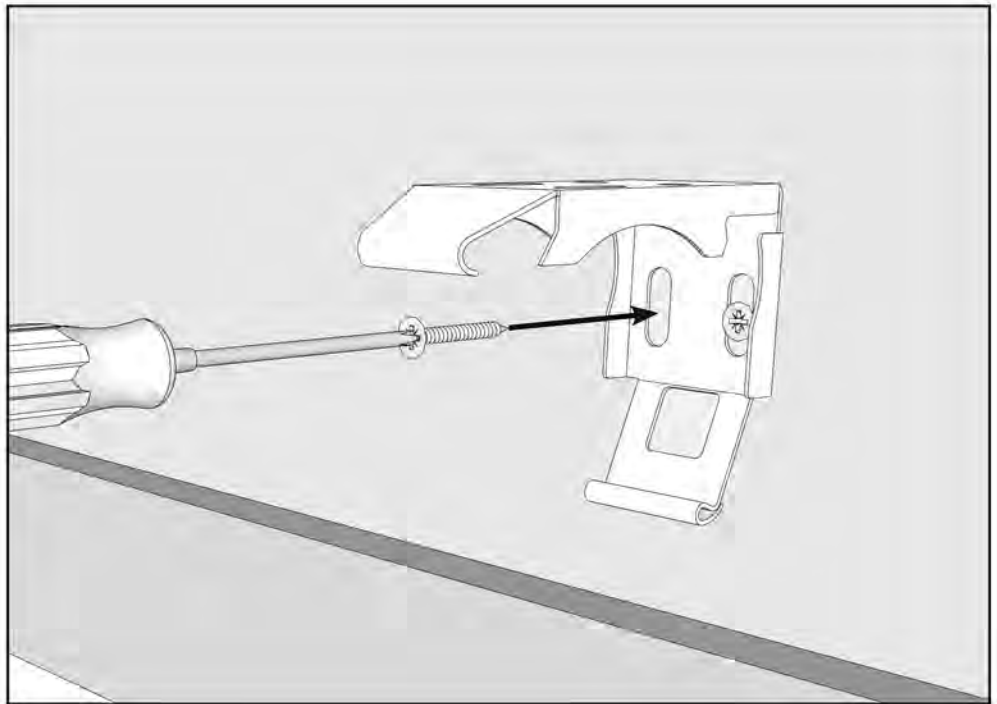

Step 2 - Outside Mount - Hang Shade

Lift blind (AA) into position and insert the top front groove of the headrail assembly into the upper holding clip of the mounting brackets (A).

Rotate the headrail assembly until the back of the headrail snaps and locks into the mounting brackets (A).


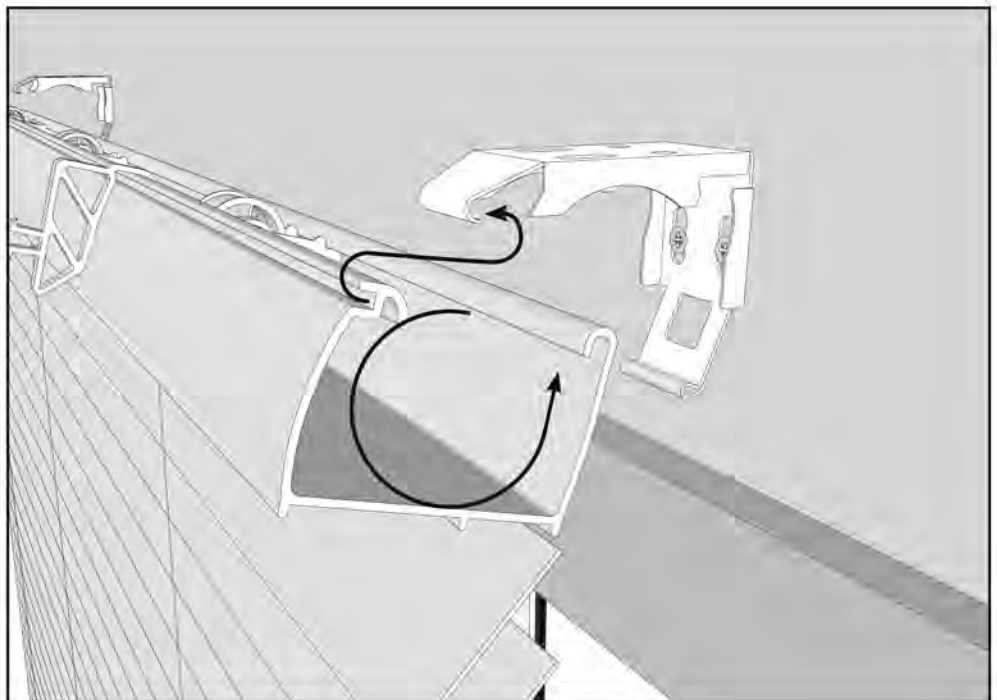


Outside Mount Installation Instructions (continued)

Step 3 - Outside Mount - Attach the Tilter and Control Wand

Insert the Tilter (F) into the tilt control mechanism in the headrail assembly by aligning and pushing into the unit until it clicks and locks into place.

Place the hook at top of Tilter Control Wand (BB) through the hang hole in the Tilter (F).

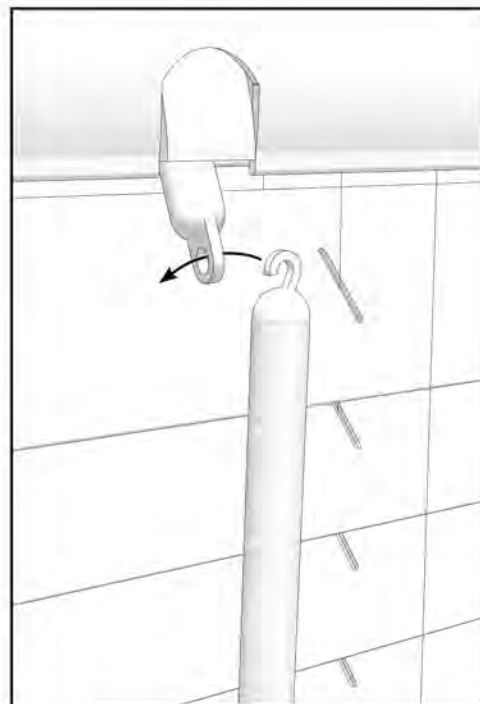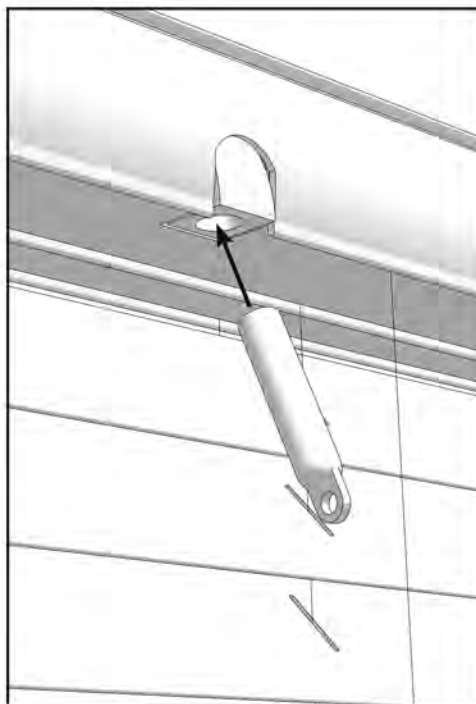

Step 4 - Outside Mount - Assemble & Install Valance (Optional)




Optional:

Insert the left and right side Valance Corner Connectors (B) into the groove located on the backside of the Valance (CC). (fig. 3A)


Attach both Valance Ends (DD) to each Valance Corner Connector (B). (fig. 3B)

Attach the Valance Clips (E) to the headrail assembly by pressing them downward until they click into place. (fig. 3C)


Raise the assembled valance into position and align the groove on the back of the valance with the valance clips. Push back on valance (BB) until it snaps onto the valance clips (E). (fig. 3D)

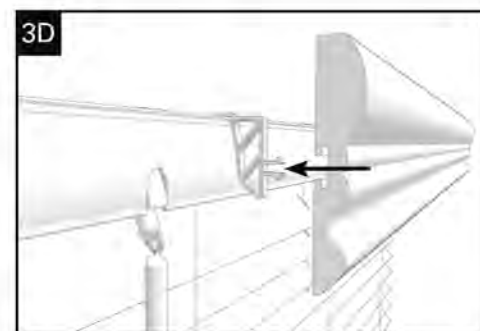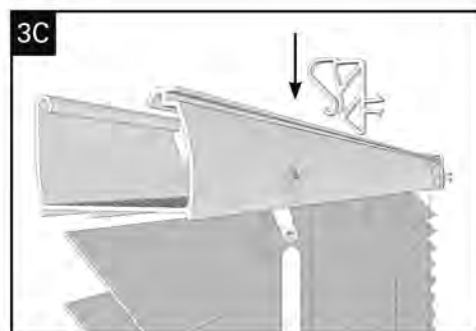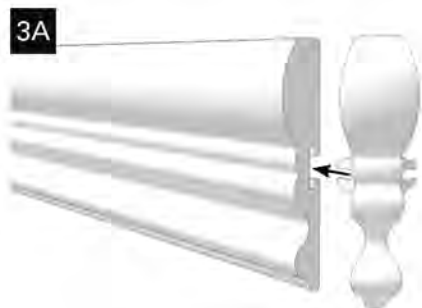


Operation

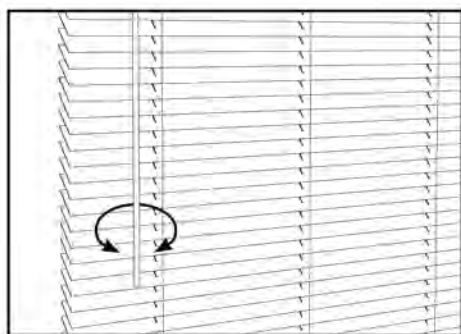

Rotate the filter control wand clockwise or counterclockwise to open or close the blind slats.

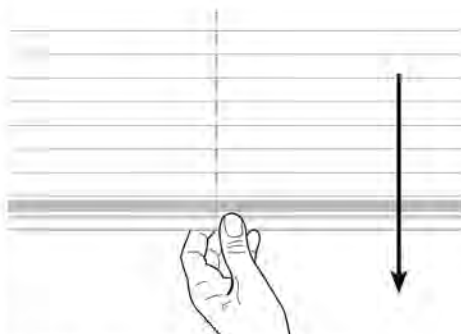

To lower the blind (AA) pull down from the bottom to the desired position and release.

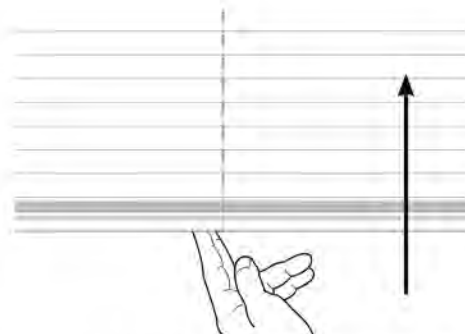

To raise the blind (AA) push up from the bottom to the desired position and release.

Cleaning

Periodic Vacuuming with proper attachments suggested. Spot clean with mild detergent free soap, testing first in an inconspicuous area.

One-Year Limited Warranty

What is covered under this warranty:

Entire product against manufacturing defects (i.e., a flaw in the product design, materials or workmanship that causes the product to no longer function (properly).

What is NOT covered under this warranty:

- Normal wear and tear

Failure due to:

- abuse • exposure to salt air • improper installation • accident • extraordinary use • misuse • alterations
- improper operation • improper cleaning • misapplication • damage from pets/insects • improper handling

Any shade that has with the passing of time:

- loss of color intensity • yellowing or cracking of plastic parts

Costs that are associated with:

- shipping • product removal • transportation to and from the retailer • product remeasure
- incidental or consequential damages • product reinstallation

Note: In the event there are multiple shades in the same room, only the defective shade will be replaced.

THIS SHALL BE YOUR SOLE REMEDY UNDER THIS WARRANTY:

If this product is found to have manufacturing defect in materials or workmanship, we will (at our discretion) do one of the following:

- repair the product • replace the product • refund the cost of the product

Note: Colors vary from lot to lot and may not match previous purchases exactly.

Discontinued items or color selections will be replaced with the closest equivalent current product.

To obtain warranty service:

If you suspect this product has a manufacturing defect in materials or workmanship:

1. Locate the sales receipt or your proof of purchase.

Your Rights under State Law:

This limited warranty gives you specific legal rights, and you may have other rights, which vary from state to state. Some states do not allow limitations on how long a warranty lasts, so the above limitations may not apply to you. No representative or unauthorized employee has the authority to increase or alter the obligation of this warranty. This limited warranty supersedes any previous versions.