Sant/Fin. Signal of the state o

SEPT. 2012 COMPLIANT

High performance, cast-iron gas boiler

Lower profile makes installations easy

The boiler you choose for your home now will affect your family's comfort—and pocketbook—for many years to come. Sentry boilers provide a blend of efficiency and reliability that will keep your home comfortably warm and your fuel costs low year after year. A new Sentry boiler can save up to 30% or more on fuel bills compared to a typical old boiler operating at 60% efficiency.

Sentry is ideal for a wide variety of gas boiler requirements as a replacement or for new installations. Its advanced design provides years of trouble-free, high efficiency operation, while providing easy installation especially in sites with low chimney connections or low overhead clearance.

- Reliable natural draft design
- Quality control features
- High performance heating
- Thermal targeting technology to conserve fuel by monitoring heating demand
- Low water cut-off function
- Thermal pre-purge option to save fuel
- Display shows boiler water temperature and boiler control's setting
- LED lights provides information of boiler operation
- *See installation instructions for specific applications and clearances.



- Input: 5 models 34,000 to 150,000 Btu/hr
- Intermittent ignition Low clearance*
- Saves energy. AFUE to 84.4%



www.slantfin.com





High performance, cast-iron gas boiler

Computer-aided design. Highest quality manufacturing. Superior components.

- Advanced design heat exchanger
- 2. Relief valve
- 3. Thermal pins
- 4. Pressure temperature gauge
- 5. Metal push nipples (Avoids leaks)
- 6. Insulated base
- Long life burners


- Gas valve
- 9. Rollout safety switch
- 10. Circulator pump
- Brand name controls 11.
- Insulated jacket
- Integral draft hood 13.
- Reliable, motorized vent damper

RATINGS FOR SENTRY BOILERS - NATURAL AND L.P. GAS

0.000	MODEL Number†	CSA INPUT (Btuh)	DOE CAPACITY (Btuh)	NET AHRI RATING WATER (Btuh)*	WATER (Sq.Ft.)	EFFICIENCY AFUE%	DIMENSIONS-Inches		
									C-VENT DIAMETER
						INTERMITTENT IGNITION	A	В	INTEGRAL DRAFT DIVERTER
	S-34	34,000	29,000	25,000	167	84.0	8-1/8	14-5/8	4
	S-60	60,000	51,000	44,000	293	84.4	11-1/8	17-5/8	4
	S-90	90,000	76,000	66,000	440	84.2	14-1/8	20-5/8	5
	S-120	120,000	101,000	88,000	587	84.1	17-1/8	23-5/8	6
	S-150	150,000	125,000	109,000	727	83.4	20-1/8	26-5/8	7

* Net ratings are based on a piping and pick-up allowance of 1.15. Slant/Fin should be consulted before selecting a boiler for installation having unusual piping and pick-up requirements. Ratings must be reduced by 4% at 2,000 feet elevation and an additional 4% for every additional 1,000 feet elevation over 2,000 feet. †Type of gas: after model number, specify gas by name "Natural" or "Propane"

Note: All Sentry boilers are tested and rated for capacity under the U.S. Dept. of Energy (D.O.E.) Test Procedure for boilers.

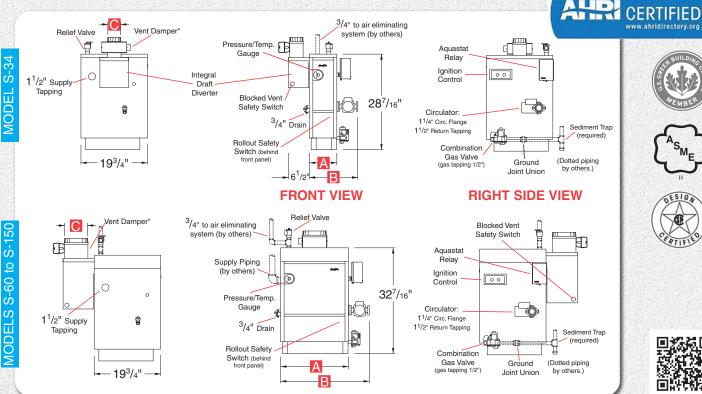





U.S.A. Slant/Fin Corporation • 100 Forest Drive Greenvale, NY 11548 • 516-484-2600 www.slantfin.com

Canada Slant/Fin LTD/LTEE • 6450 Northam Drive Mississauga, Ontario L4V 1H9 • 905-677-8400 www.slantfin.ca