

FLOOR LAMP

IMPORTANT SAFETY INSTRUCTIONS

Read and Save:

1. To reduce the risk of electric shock, this lamp has a polarized plug (one blade is wider than the other). The plug will fit in a polarized outlet only one way. If the plug does not fit fully into the outlet, reverse the plug. If plug still does not fit, contact a qualified electrician. Never use an extension cord unless the plug can be fully inserted. Do not alter the plug.
2. Do not install non-factory wiring or any other electrical components. Altering or modifying the lamp in any way will render the product unsafe.
3. Avoid laying objects directly over the power supply cord to avoid cutting or damaging the wire.
4. Keep curtains, shades, wall hangings and all other fabrics and objects away from the lamp, lamp switch and light bulb. Lamps are not designed to support additional weight.
5. Place the lamp on a stable, level surface in an area where the lamp will not be tipped over or bumped.
6. This lamp is approved for indoor use only.

BULB REPLACEMENT (bulb not included)


Requires 60 Watt max E26 Type A Bulb or CFL or LED equivalent.

DO NOT EXCEED RECOMMENDED BULBWATTAGE.

1. Turn off and unplug the lamp and allow bulb to cool before replacing bulb.
2. Light bulb should never touch the lamp shade.

CLEANING AND MAINTENANCE.

1. To clean: use a soft, dry cloth only.
2. Do not use chemical or abrasive cleaning solutions.

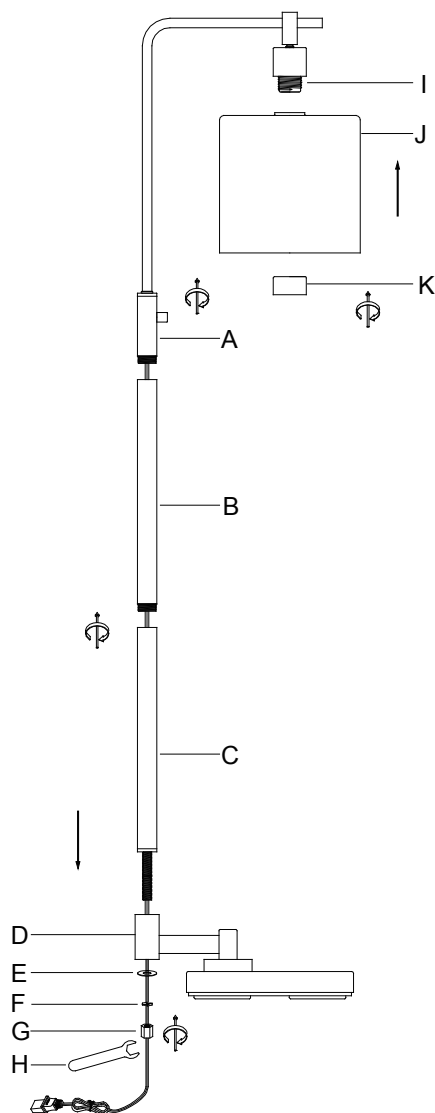

ASSEMBLY INSTRUCTIONS

1. Carefully unpack and line up all parts.
2. Insert and thread the tube (B) onto the tube (A) by turn clockwise until the tubes are evenly joined.
3. Insert and thread the tube (C) onto the tube (B) by turn clockwise until the tubes are evenly joined.
4. Insert the tube (C) onto the base (D).
5. Install the big Washer (E) and small washer (F) onto the tube (C), then secure the nut (G) by wrench (H) which is included.
6. Check and make sure the lamp socket body and base (D) are pointing towards the same direction.
7. Remove the pre-assembled ring (K) from the socket assembly (I) , place the shade (J) onto the socket assembly (I), then secure with the ring (H) until secure.
8. Install the light bulb (not included) onto the socket assembly (I).
9. Insert the plug into an electrical outlet.
10. Use the rotary switch on Tube (A) to turn the lamp ON and OFF.
11. Adjust the swivel joint slightly to straighten the shade (J) if necessary.