
STEP 6 - SECONDARY HAND RAIL

HANDRAIL INSTALLATION

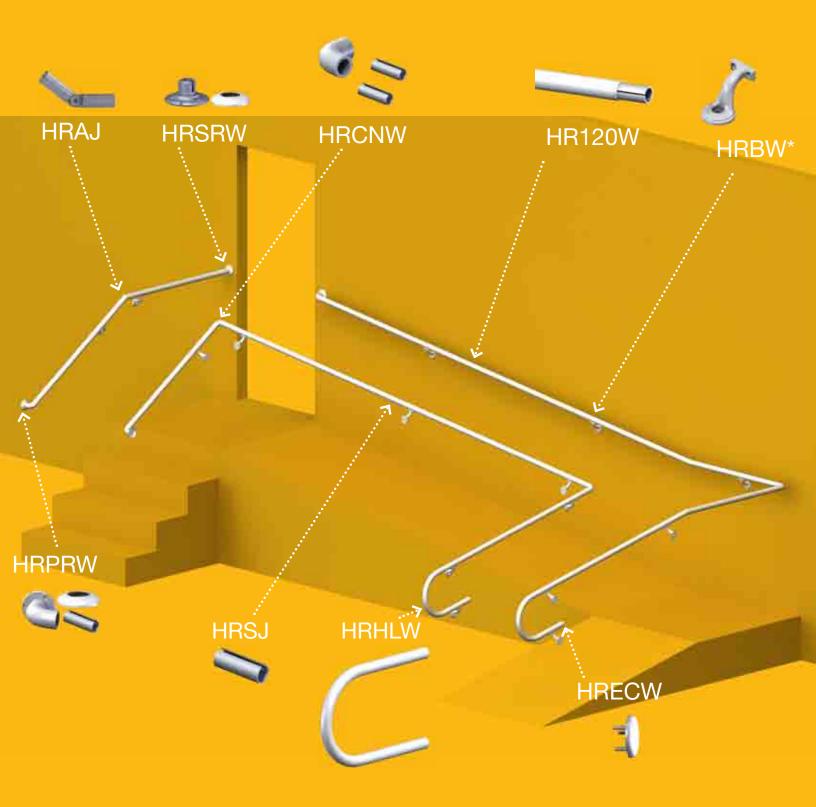

^{*} Brackets should be placed underneath joint or on both sides of the joint, no more than 6' apart