



LED Lighted Bathroom Mirror Installation

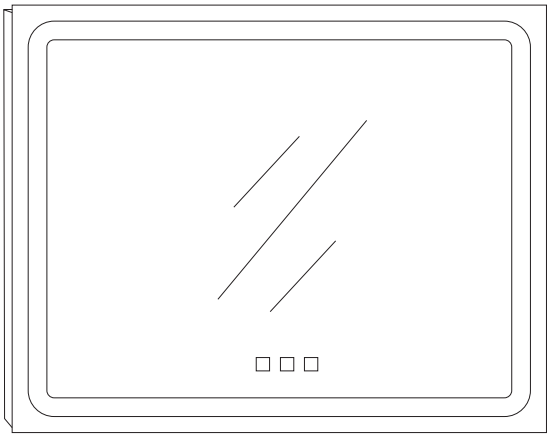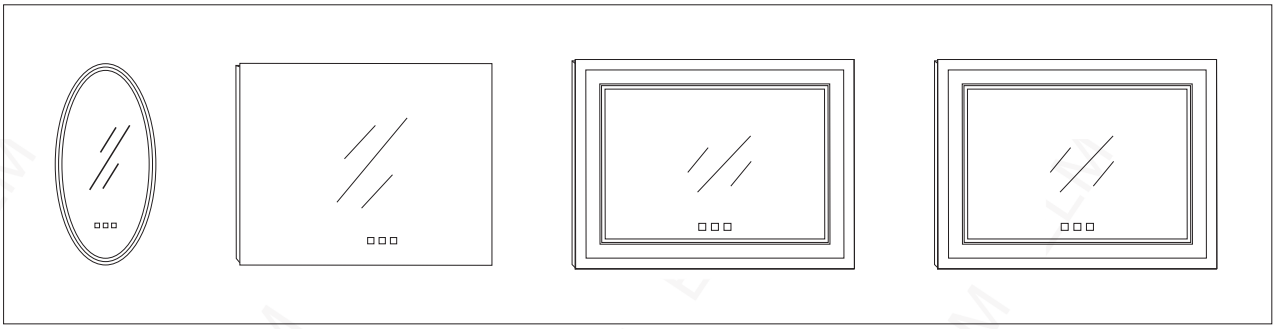





Please prepare below tools before assembly.(Not Included)			
 ELECTRIC DRILL	 PENCIL	 HAMMER	 TAPE MEASURE
 + SCREWDRIVER	 - SCREWDRIVER	 RULER	

Electrical Safety Instructions

INSTALLATION has to be made by a qualfed/registered electrician.

Important

Read this instruction carefully and refer back to them during installaton to ensure that your product is fitted safely and correctly.

Always switch off the electrical supply at the mains during installation and maintenance.It is recommended that the fuse is withdrawn or the circuit breaker is switched off for the necessary circuit before installation.

Fitting in Bathrooms is subject to the appropriate zone in accordance with IEE Regulations. This product is suitable for zone 2 and outside zones. IT IS NOT suitable for installation in Zone O or Zone I.It is also not suitable for installation in saunas, steam rooms or shower cubicles.This product is only suitable for permanent instalation.DO NOT connect to a trailing plug and socket outlet Altough this product has an Ingress Protection rating of IP44 it is only suitable fir indoor use. DO NOT attach the product to surfaces that are damp or otherwise electrically conductive.

Installation Care&Safety

Wear suitable eye protection when drilling.Take care when using power tools near water the use of a residual current device (RCD) is advised.Beware of hidden cables or pipes.Take care if drilling on tiled surfaces in case the drill slips. A piece of masking tape applied to the wall before marking out the fixing holes will stop the drill from wandering.



- DO NOT strike glass components with hard or pointed items.
- DO NOT place very hot or very cold items against or in clase proximity to glass surfaces unless an adequately thick insulation material isused to prevent such items coming in contact with the glass.

The nominal thickness of the mirror glass used in this product is 5mm.If the glass becomes chipped or broken replace immediately.

This product should be positioned well away from curtains and other fabrics.Never cover the mirror This product is heated,we recommend that it is turned off after use and should never be left on for prolonged periods of time

This product could be dangerous if installed incorrectly.

PLEASE RETAIN THIS INSTRUCTION LEAFLET FOR FUTURE REFERENCE.

Cleaning

WHEN THE MIRROR MUST BE CLEANED, IT IS NECESSARY TO SWITCH IT OFF FIRSTLY!

DO NOT use abrasives or solvents when cleaning this product Wipe of fall water spillages as soon as possible using a soft, damp cloth.
DO NOT submerge mirror in water, DO NOT let go of water in the mirror.

Compliance

All electronic components used in this products are UL listed.

Wiring

This product is designed and manufactured in class II category.no need earth connection. The product need hardwired with the supply cable lead from the wall. Also we provide extra 1.5m U.S. 2-pin plug for easy connection with exist wall socket.

Lights&Control


The integrated LED light source and system are not support to replaced by consumers, please DO NOT change by yourself.
The lights(and defogger) are controlled by touch sensor on mirror surface to turn on/off and adjust brightness and color temperatures.
Keeping the mirror lights on, then you also could control it on&off by wall switch, if connect with it.The last working condtion before switching off would be kept while turn on again, either brightness level or color temperature.

Assembly Instructions

Before install, please read follow installation procedure.

Installation Procedure

Before starting your installation, please make sure
·The wall surface must be of suitable strength and construction
·The main electricity supply has been power-off

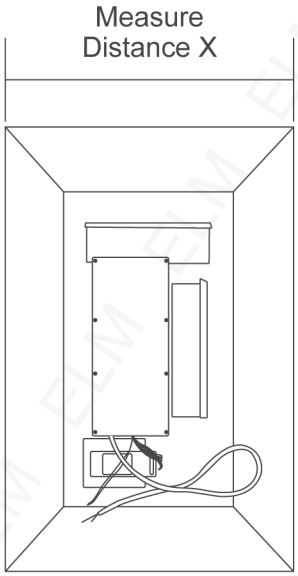

②Measure the distance(X) between the key-hole centers on the back of the mirror (can behang vertically or horizontally) .
②Draw a horizontal line on the wall according to the height you want hang the mirror.


Mark the dril positions on the horizontal line using dimension(X) taken from step I, Ensure the hole positions are horizontal by using a spirit level.(step 2) Accurately mark the 2 hole positions with a pencil, drills and fit the wall plugs.

NOTE： The wall plugs supplied are only suitable for solid stone / brick walls. For any other wall types，


please go to stores to buy the correct plugs & screws after checking.

②The next step is to make the electrical connection from the mirror to the mains supply.Use the
connection wire found at the rear of the mirror to make the necessary connections.
②Insert the wall screws supplied into the wall plugs. Leave approximately 5-10mm of the screw standing
proud of the walL. Mount the mirror onto the screws fitted to the wall Ensure mirror is securely mounted.
To remove the mirror, the mirror should first be lifted and then pulled away from the wall.

STEP 1

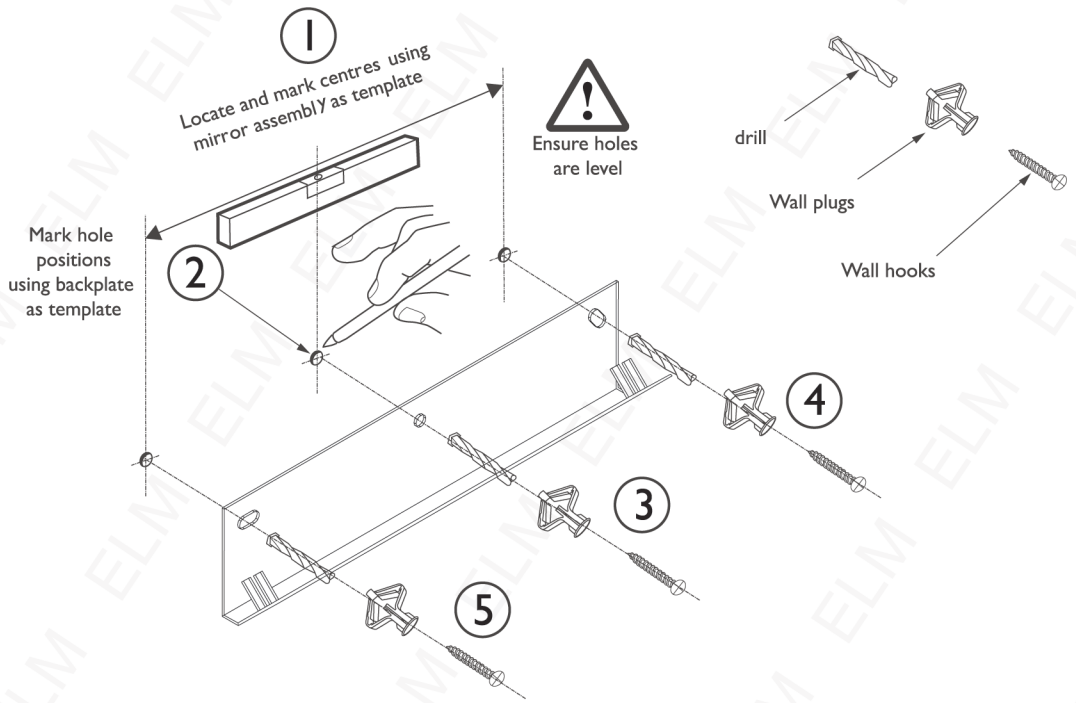





STEP 2

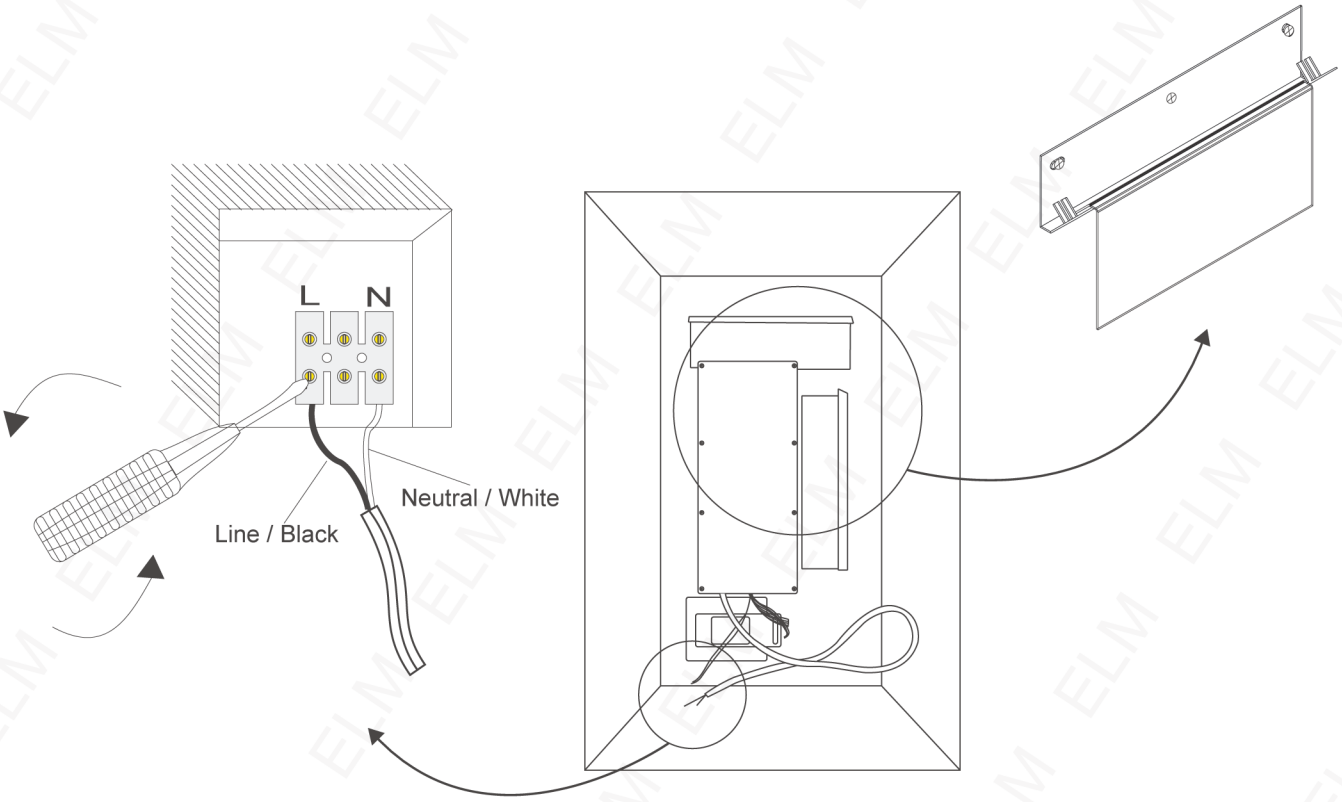

Please find the input cable with terminal block equipped on the end. Make connections with filed wire. Neutral to white and Line to black. This mirror was designed and produced according to CLASS || level (Double Insulation), no need ground wire connection. Just insert ground wire(green) if you have into the central hole of the terminal block.
Ensure all connection are tight in place.

Function Instructions

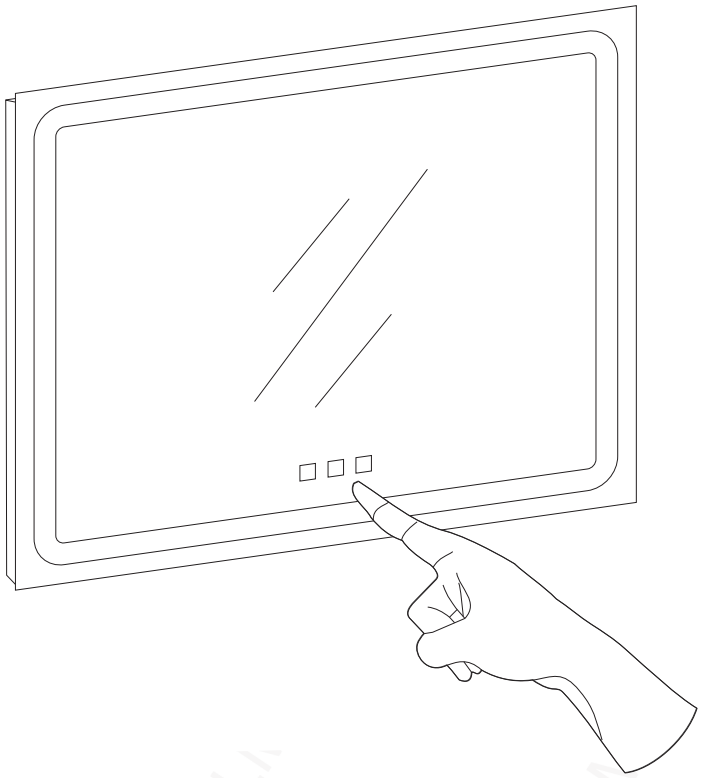

	**ON&OFF/Dimmer Switch** ①.Touch this button, control the LED Mirror ON-OFF ②.Press this button for few seconds, adjust light brightness at the strongest, medium and nightlight as your need.
	**Color Temperature Selection Switch** To select 3000K or 5500K as you like.
	**Defogger Function Switch** Touch this button, to control the anti-Fog function.