




Item No. BR24/BR24B
Installation Guide

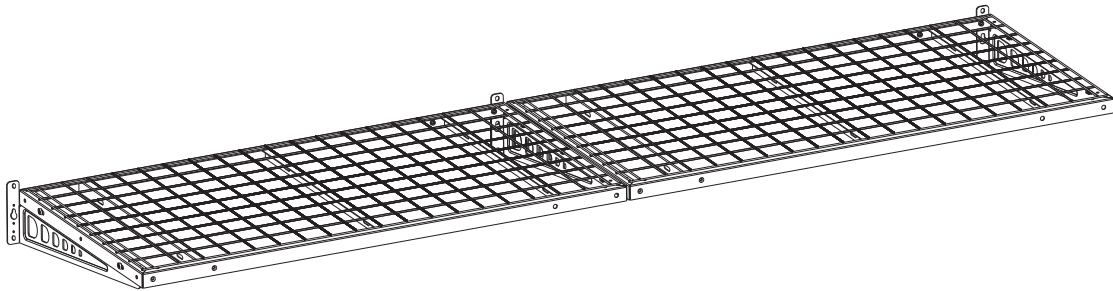

FLEXIMOUNTS




ADDRESS: 6475 Las Positas Rd. Livermore, CA 94551
ADDRESS: 4290 Concorde Road, Memphis, TN 38118
TEL: 1-855-421-2808

Attention
THIS IS A DO IT YOURSELF (DIY) PROJECT. DO NOT ATTEMPT THIS
INSTALLATION WITHOUT A BASIC UNDERSTANDING OF THE CONTENTS
IN THESE ASSEMBLY INSTRUCTIONS.



Package Contents





(A) Parts Included

①		Shelf Wall Bracket (3 pcs)
②		Wire Grid (2 pcs)
③		Reinforcing Plate (1 pc)
④		Installation Template (1 pc)

(B) Screw Set

A  M6x20mm Bolts (2 pcs)	B  M8x16 Bolts (8 pcs)	C  M8x20 Bolts (2 pcs)	D  M6 Nut (2 pcs)	E  M8 Nut (8 pcs)
F  4x4 Hex Wrench (1 pc)	G  5x5 Hex Wrench (1 pc)	H  Wrench (1 pc)	I  Level (1 pc)	
B1  St8x60 Tapping Screw (12 pcs)	B2  10x50 Expansion Pipe (12 pcs)	B3  Φ8 Washer (12 pcs)		

(C) Tools Needed for Assembly



						
Pencil	Pistol-Grip Drill / Hammer Drill	Tape Measure	Stud Finder	Ladder	Eye Protection	Screw Driver

Installation Steps


Step 1-A: Attach the shelf wall bracket to wood studs

Parallel Installation:


1. Use the stud finder to find the wood stud and confirm the suitable installation height. Mark the mounting holes using the installation template and level.
2. Drill a 2.4" (60mm) deep 0.2" (5mm) diameter pilot hole using 3/16" drill bit at the center of each marked point.
3. Attach three shelf brackets horizontally to the wall using tapping screws (B1), and washers (B3) and tighten it with the screw driver. Please use the reinforcing plate ③ as the middle wall bracket.

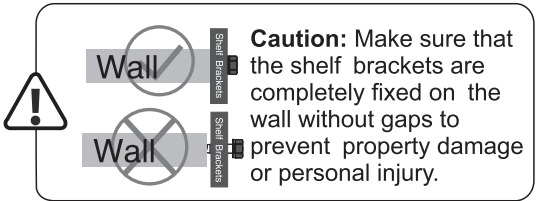


1. Suitable for stud distance of 16" or 24"

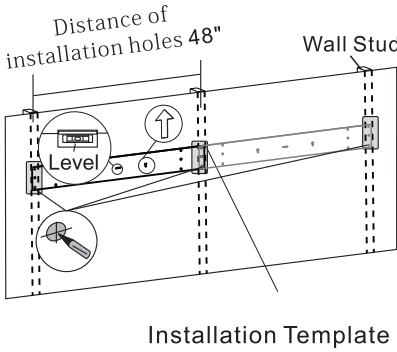

2.

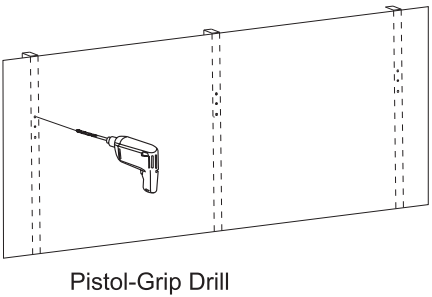


3.

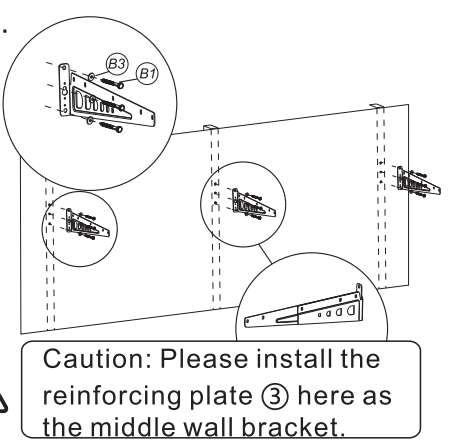


Vertical Installation:

Install two shelf brackets on the upper side and two on the lower side. Please pay attention that the reinforcing plate ③ needs to be installed on the left, either upper side or lower side is OK.


1. Suitable for stud distance of 18"




2.



3.

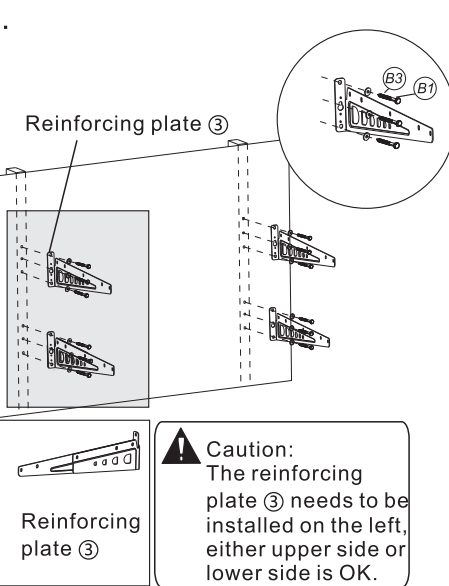

Distance of installation holes 48"






Suitable for stud distance of 16" or 24"

Step 1-B: Attach the shelf wall bracket to solid concrete wall


Parallel Installation:

1. Confirm the suitable installation height according to your actual need. Mark the mounting holes using the installation template and level.
2. Drill a 2.4" (60mm) deep 0.39" (10mm) diameter pilot hole using 3/8" drill bit at the center of each marked point.
3. Attach three shelf brackets horizontally to the wall using tapping screws (B1), expansion pipes (B2) and washers (B3) and tighten it with the screw driver. Please use the reinforcing plate ③ as the middle wall bracket.

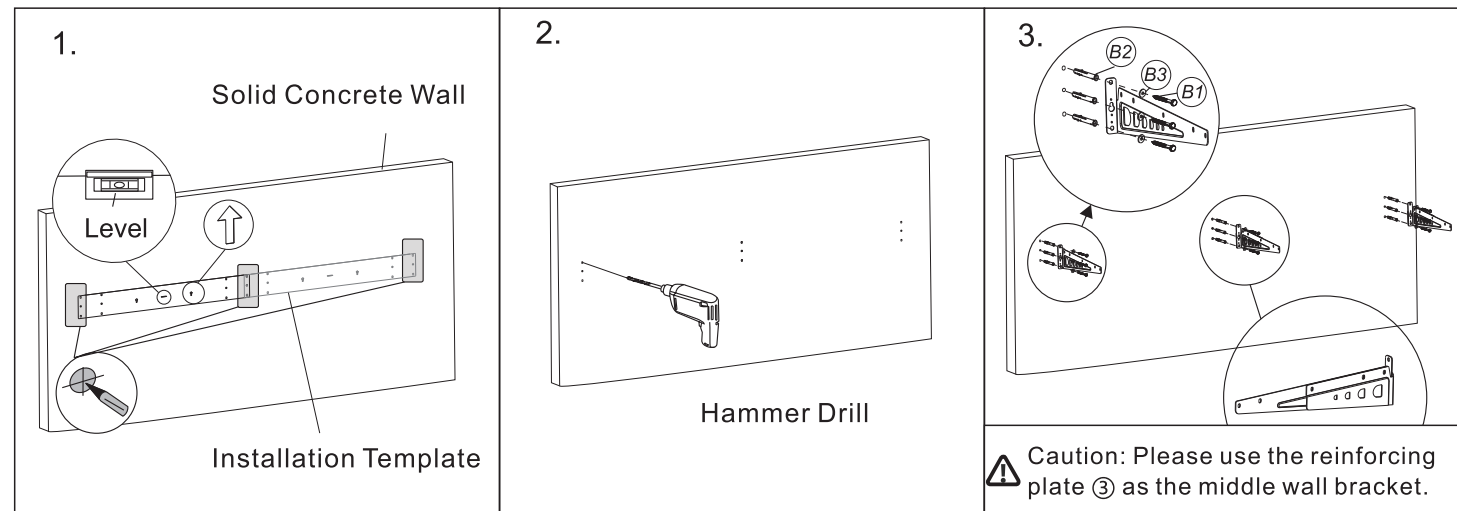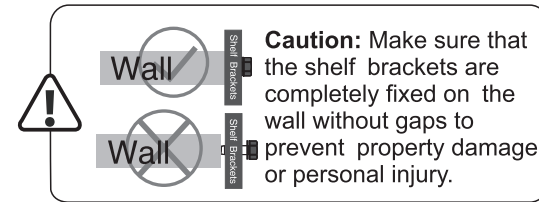

Vertical Installation:


Install two shelf brackets on the upper side and two on the lower side. Please pay attention that the reinforcing plate ③ needs to be installed on the left, either upper side or lower side is OK.

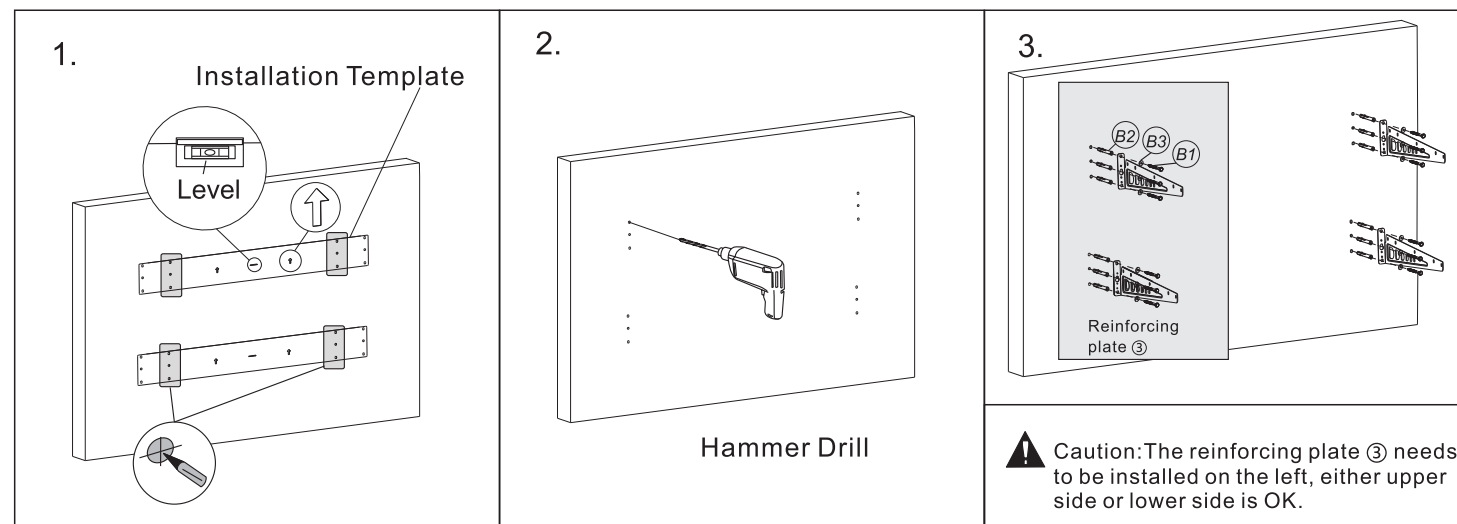

Step 2: Installation of wire grids


Parallel Installation:

1. Attach the wire grids ② to the shelf brackets ①.
2. Piece the two wire grids together with 2 pcs M6x20 Bolts (A) and 2 pcs M6 Nuts (D), 2 pcs M8x20 Bolts (C) and 2 pcs M8 Nuts (E), then tighten them with 4x4 Hex Wrench (F), 5x5 Hex Wrench (G) and Wrench (H). Connect the wire grids and shelf brackets with 2 pcs M8x16 Bolts (B) and 2 pcs M8 Nuts (E) on either side, then tighten it with 5x5 Hex Wrench (G) and Wrench (H).

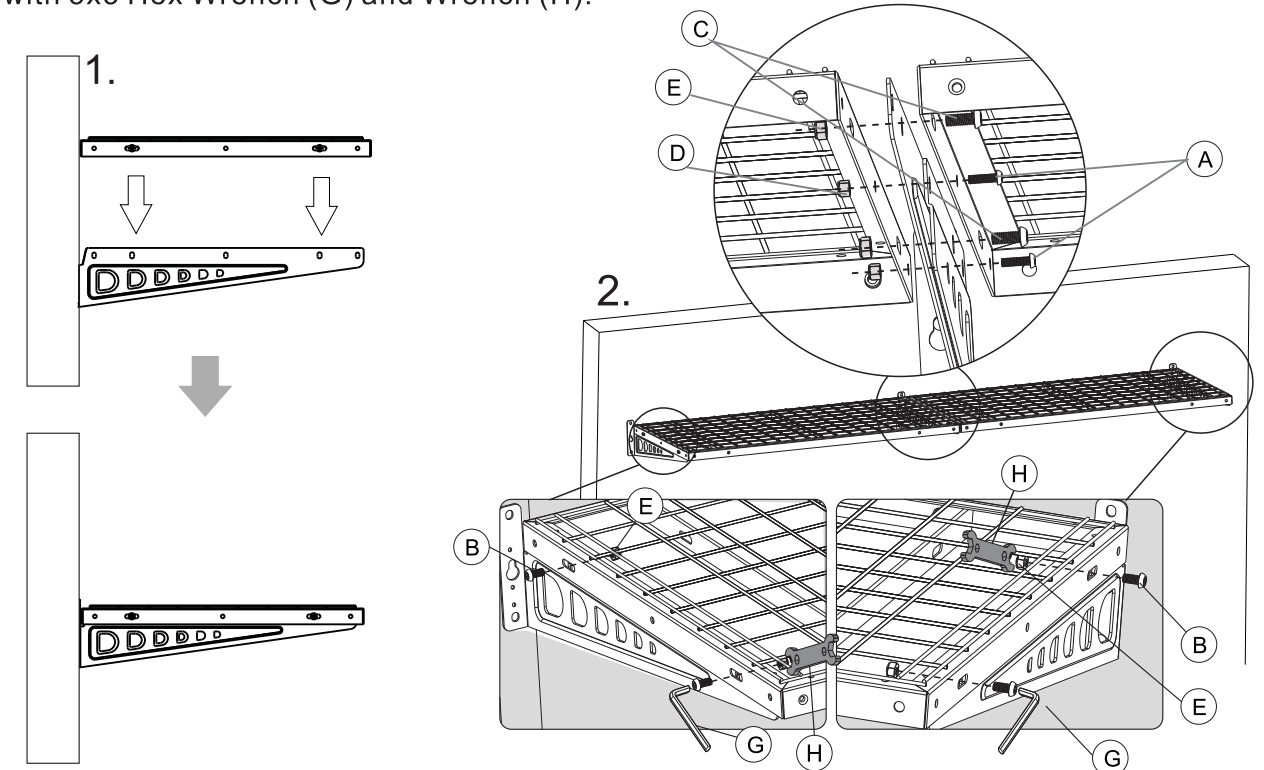

Vertical Installation:

1. Attach wire grids ② to both upper and lower shelf brackets ①.
2. Connect the wire grids to the shelf brackets with 2 pcs M8x16 Bolts (B) and 2 pcs M8 Nuts (E) on each side, and tighten it with 5x5 Hex Wrench (G) and Wrench (H).

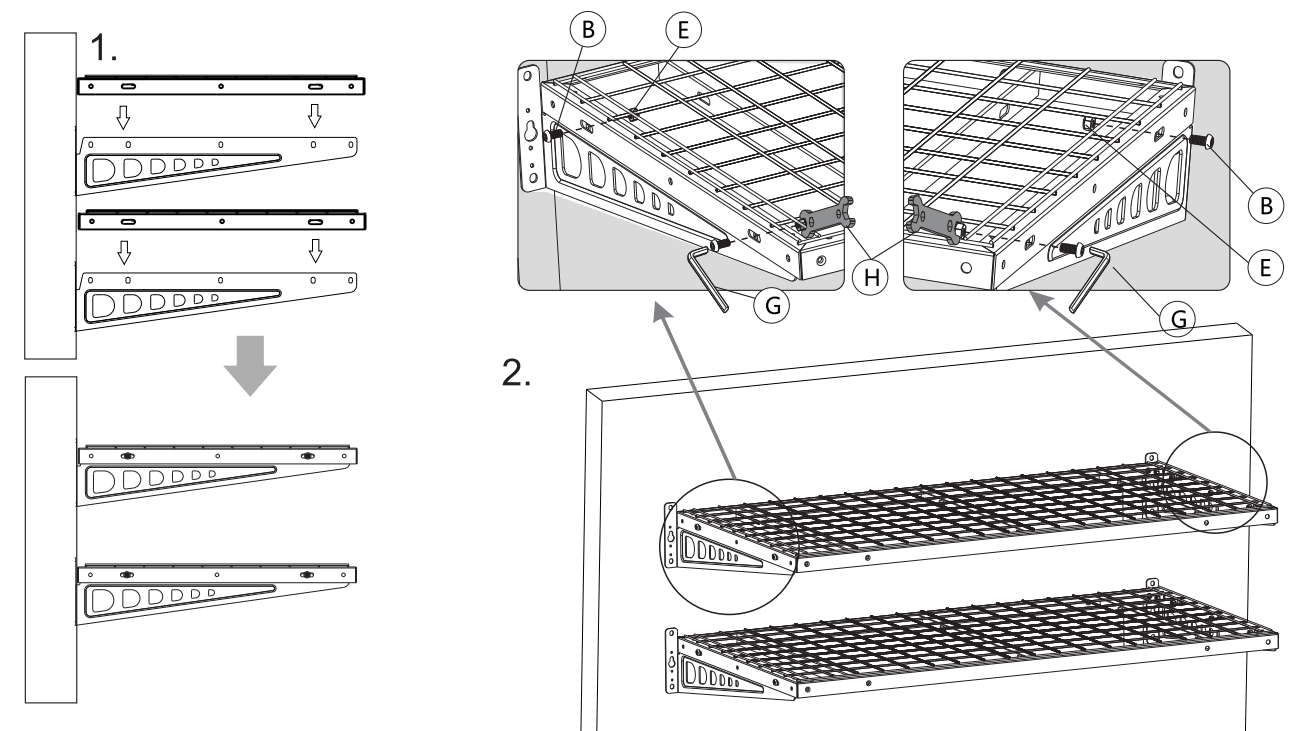

⚠ CAUTION

This product contains small items that could be a choking hazard if swallowed. Keep these items away from young children.

- Make sure these instructions are read and completely understood before attempting installation. If you are unsure of any part of this installation, please contact a professional installer for assistance.
- The Wall must be capable of supporting the combined weight of the garage rack and your stuff. Otherwise, the structure and weight capacity of the ceiling must be reinforced.
- Proper tools must be used. A minimum of two people are required for this installation. Failure to install properly can result in property damage or serious injury.
- Check joint parts every two months, making sure the screws have not loosened.
- This product is designed to be installed on a wooden wall or solid concrete ceiling. Before installation, make sure that the weight capacity of the wall will support the combined load of the rack and your stuff. Never exceed the maximum load capacity of the product 220 lbs (100 kg), or else it may result in product damage or physical injury.

Note: This product is intended for indoor use only. Use of this product outdoors could lead to product damage or physical injury.

Fleximounts Limited Warranty

This limited warranty offered by Fleximounts covers defects in material or workmanship in new Fleximounts products. This warranty extends to the original purchaser only and is non-transferable. Only consumers purchasing Fleximounts products from authorized Fleximounts retailers or resellers may benefit from our limited warranty.

What is Covered?

The Fleximounts limited warranty covers our products against defects in material or workmanship as follows:

- Fleximounts Electric Garage Rack

All electric garage racks purchased on or January 1, 2018 include a **5-year** warranty for the mechanisms, and **3-year** warranty for the motor.

What are your Remedies?

Fleximounts will replace at no charge to the consumer the defective parts only or, at Fleximounts's option, replace any product or part of the product that is defective because of improper workmanship and/or material, under normal installation, use, service and maintenance. If Fleximounts is unable to provide a replacement and repair is not practical or cannot be completed in a timely fashion, Fleximounts may elect to refund the purchase price in exchange for the return of the product. In the rare event that your Fleximounts product is defective, we will provide you with a replacement item shipped at no cost to you within the continental United States. The shipping method for replacement products is FedEx Ground, but expedited shipping is available if you choose to pay the additional expense. In addition, you will need to pay the shipping costs if any products need to be shipped to you at an address outside the continental United States.

REPAIR OR REPLACEMENT (OR, IN LIMITED CIRCUMSTANCES, REFUND OF THE PURCHASE PRICE) AS PROVIDED UNDER THIS WARRANTY IS THE EXCLUSIVE REMEDY OF THE PURCHASER. FLEXIMOUNTS NEITHER ASSUMES NOR AUTHORIZES ANY PERSON TO CREATE FOR IT ANY OTHER OBLIGATION OR LIABILITY IN CONNECTION WITH THIS PRODUCT.

What Is Not Covered?

Our limited warranty does not cover any problem that is caused by:

1. Conditions, malfunctions or damage not resulting from defects in material or workmanship.
2. Conditions, malfunctions or damage resulting from normal wear and tear, improper installation, improper maintenance, misuse, abuse, negligence, accident or alteration.
3. Accessories, connected materials and products, or related products not manufactured by Fleximounts.
4. Conditions, malfunctions or damage resulting from failure to follow the instructions and guidelines relating to the product's intended use.

Our limited warranty is void if a product is returned with removed, damaged or tampered labels or any alterations (including removal of any component or external cover).

How to File a Claim?

In order to receive the benefit of our limited warranty, you need to process your claim in compliance with the terms of this limited warranty and follow proper return procedure. To request warranty service, please contact customer service via email at contact@Fleximounts.com or toll free at 855-421-2808. You will need to provide the sales receipt or other evidence of the date and place of purchase for your Fleximounts product.

Implied Warranties and Limitation of Damages

EXCEPT TO THE EXTENT PROHIBITED BY APPLICABLE LAW, ALL IMPLIED WARRANTIES (INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE) SHALL BE LIMITED IN DURATION TO THE DURATION OF THIS WARRANTY, AND FLEXISPOT SHALL NOT BE LIABLE FOR ANY INCIDENTAL, INDIRECT, SPECIAL, OR CONSEQUENTIAL DAMAGES, INCLUDING BUT NOT LIMITED TO LOSS OF PROFITS OR REVENUE, RESULTING FROM ANY BREACH OF EXPRESS OR IMPLIED WARRANTY OR CONDITION, OR UNDER ANY OTHER LEGAL THEORY, EVEN IF FLEXIMOUNTS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Some jurisdictions do not allow limitations on the duration of an implied warranty or the exclusion or limitation of special, indirect, incidental or consequential damages, so the above limitations or exclusions may not apply to you.

Governing Law

This Warranty shall be governed by the laws of the State of California, USA, without giving effect to any conflict of laws principles that may provide the application of the law of another jurisdiction.

How State Law Applies

This Warranty gives you specific legal rights, and you may also have other rights which vary from state to state.