

Low Threshold Shower 60" x 32" **Ella Standard** - Left or Right Seat



Model#

6032 SH 1S 3P 4.0 L-WH STD 6032 SH 1S 3P 4.0 R-WH STD 6032 SH 1S 3P 4.0 L-BN STD 6032 SH 1S 3P 4.0 R-BN STD 6032 SH 1S 3P 4.0 R-B STD

Ella Standard Accessories (optional)

hansgrohe PONTE GIULIO creating solutions

German Engineering

Italian Design

Outside Dimensions: 33'' W x 60'' L x 77'' HSeat Dimensions: 22'' W x 18.5'' L x 21'' HShipping Dimensions: 60'' W x 48'' L x 72'' H

Shipping Weight: 313 lbs. Net Weight: 300 lbs. Threshold Height: 4"

Package Options:

- White (W), Bone (BN) or Biscuit (B) Shower Panels
- Standard, Plus 24, Plus 36, Freedom, or Prestige
- Flange Trim Molding Kit
- Multi-Piece Window Trim Kit

Panels:

Shower Base	.33"	W	Χ	60"	L	Χ	28"	Н
Side Wall Panel Left	33"	W	Χ	30"	L	Χ	49"	Н
Side Wall Panel Right	33"	W	Х	30"	L	Χ	49"	Н

Features:

- Premium marine grade gel-coat, three piece shower with 6" classic tile pattern design and diamond accent
- Wood reinforced walls for placing grab bars and seats anywhere (not dependent on stud locations)
- Easy shower wall assembly pin-lock system allowing front side installation
- Precision fit wall panel seams (match into grout pattern)
- Grip-Sure™ floor texture
- Self supporting, pre-leveled shower base (no mudset required)
- Shower door friendly (squared corners allow door installations)
- Ships pre-assembled, heavy duty crating protects product in transit

Accessories:

• 2" Chrome Strainer, Brass Drain with Friction Seal



Codes:

IPC, UPC, ANSI Z 124.2, NAHB, HUD, FHA


Warranty:

30 Year Limited Lifetime Warranty (on shower panels)*

*For more information please visit www.ellasbubbles.com



Low Threshold Shower 60" x 32" **6032 SH 1S 3P 4.0** - Left or Right Seat *Left Seat Shown

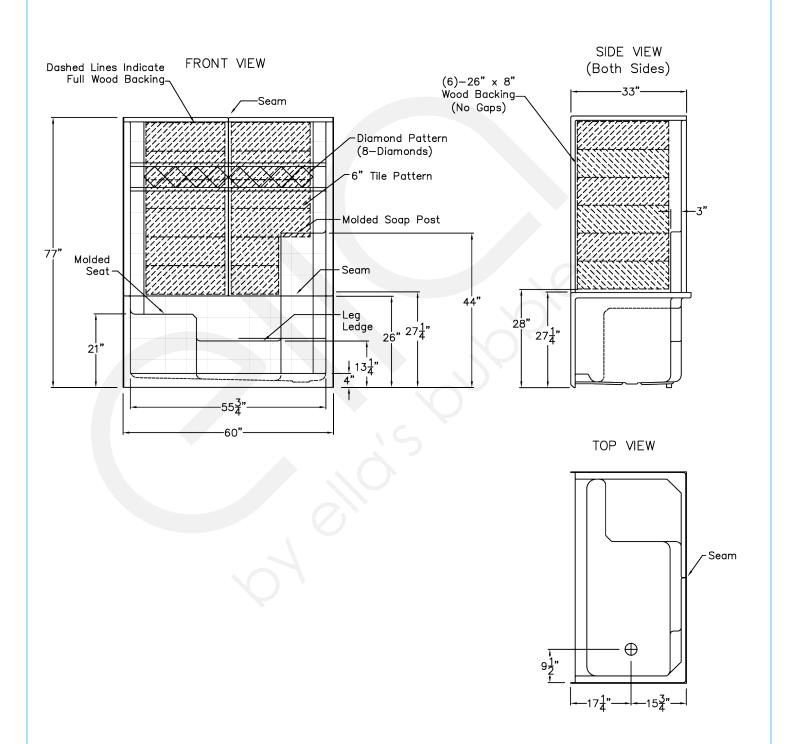


In an effort to continually improve our product, specifications and configurations are subject to change without notice. Before ordering or installing, consider future access to essential equipment. Due to the nature of the materials, dimensions may vary \pm 1/2".



Low Threshold Shower Features

STRENGTH

Wood & Steel Reinforced Walls



Fiberglass resin structural substrate cures to a seamless strong encasement.

All panels are backed with 3/8" wood, accessories can be installed anywhere.

Premium Marine-grade Gel-coat fiberglass surface for beautiful. long-lasting shower surface.


Twice the weight and twice the raw materials used in the construction of our showers than listed by any of our competitors.

Wood reinforced core walls and high density base.

ADAPTABILITY

Customized Accessory Placement

The wood reinforced core walls allow the fixtures to be installed right onto the wall studs by eliminating the need for a drywall backing.



SHOWER DOOR FRIENDLY

Your choice: Curtain or Door

Square corners in Ella shower construction allow for framed or frameless shower doors to be installed.



Image for Illustration only


FRONT SIDE INSTALLATION

Aluminum Pin and Slot System for a contractor friendly front side installation.

An installation may be finished in a fraction of the time. No more need to get behind the panels to bolt large panels together.









AVAILABILITY

Your Project won't be held up

Ella showers are manufactured, inspected and shipped directly from the factory within 5 - 7 business days.

Rush orders are available upon request (white only).

No order is too big or small.

SMART PACKING



In stock for Rapid Ship

4" LOW THRESHOLD DETAILS



