


# Onduline®

## FLASHING BAND

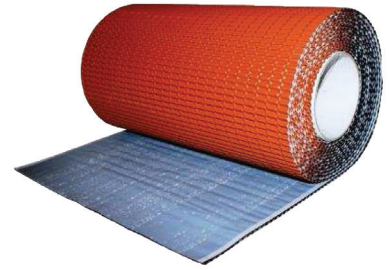

### Aluminum flashing tape with butyl adhesive

- Can be installed at low temperatures (as low as 41° F)
- No special tools required (unlike metal flashing)
- Easy to install--Can be adjusted and repositioned until it sets
- Butyl adhesive ensures uncompromising and long-lasting sticking power

#### PRODUCT DETAILS

Dimensions	8'2" x 11.75"
Packaged	4 rolls/case

#### INSTALLATION

##### Surface Prep:

Surfaces must be clean and dry. Remove any loose material with a scraper or wire brush. Porous surfaces (such as brick or concrete) should be treated with a compatible adhesive primer such as 3M™ HS-90, and allowed to dry before Flashing Band application.

##### Application:

Cut to the required length. Peel back a workable length of the backing and press the tape into place. Continue to remove the backing while firmly placing the tape. Use a small roller to press out any air pockets or large wrinkles and to ensure all edges and overlaps are fully sealed. (Overlap at least 3".)



#### AVAILABLE COLORS

- Onduline Red
- Brick Red
- Terracotta
- Brown
- Black
- Grey



**Onduline®**  
NORTH AMERICA

4900 Ondura Drive, Fredericksburg, VA 22407

Phone: 800.777.7663 FAX: 540.898.4991

[www.onduline-usa.com](http://www.onduline-usa.com)

©2015 Onduline North America, Inc. Printed in USA C-AE-CC

