
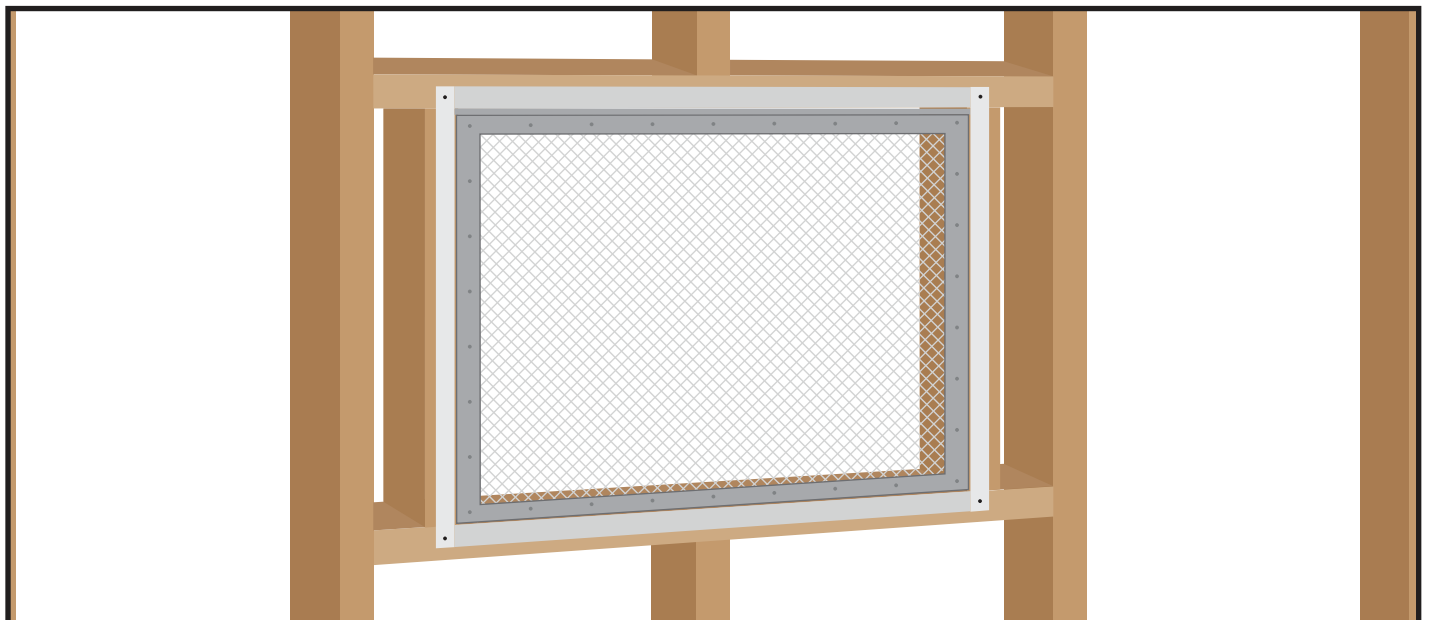


Gibraltar Ventilating Access Doors provide ventilation and a secure entry to your crawlspace for maintenance, plumbing and heating repairs as well as storage. Designed for wood frame construction.

1. Frame an opening that is 1/4 inch larger than the nominal door size. 18-1/4 in. x 24-1/4 in.
2. Insert the access door frame and secure with #10 wood screws through the holes provided on the flange.
3. Insert the pressure fit screen door.

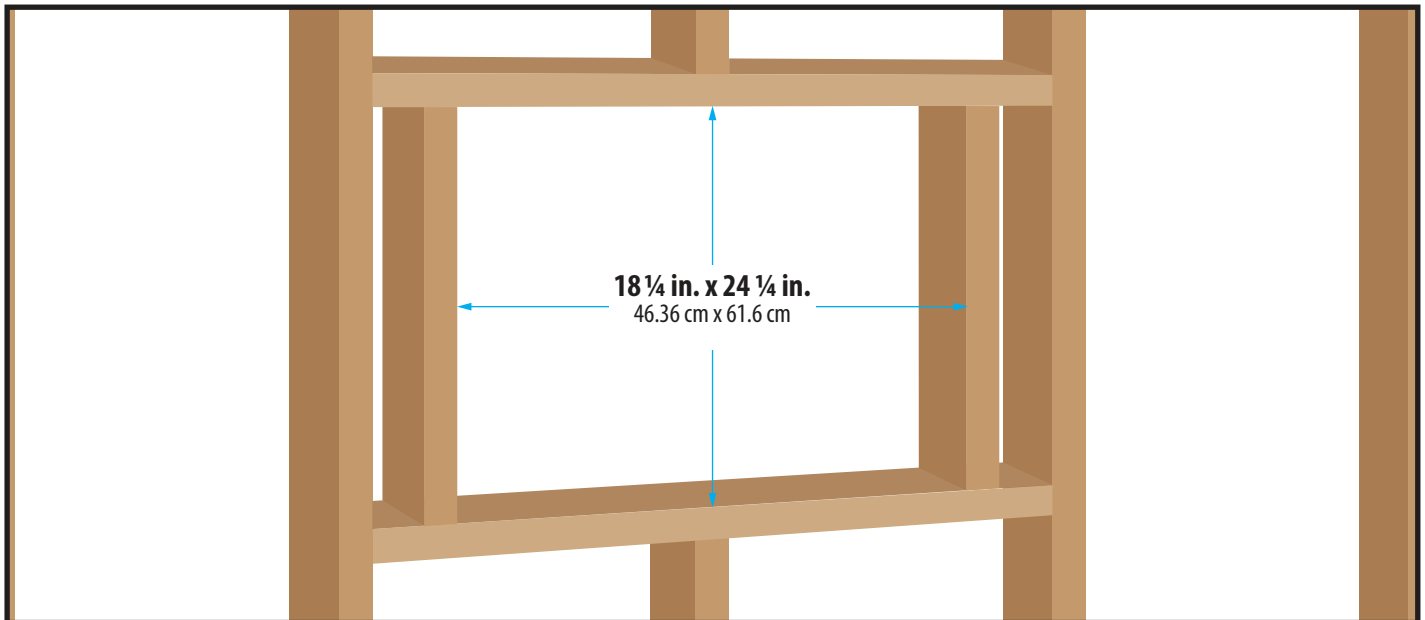

24 in. x 18 in. is the minimum size for a building code approved crawl space access. 36 in. x 24 in. is the minimum access for a crawl space access with mechanical equipment.