


ultraSeal floorMuffler®



- PREMIUM FLOORING UNDERLAYMENT
- FOR LAMINATE, ENGINEERED, SOLID WOOD AND RIGID CORE* FLOORING
- FOR RESIDENTIAL AND COMMERCIAL APPLICATIONS
- FOR FLOATING, NAIL DOWN AND DOUBLE GLUE DOWN INSTALLATIONS

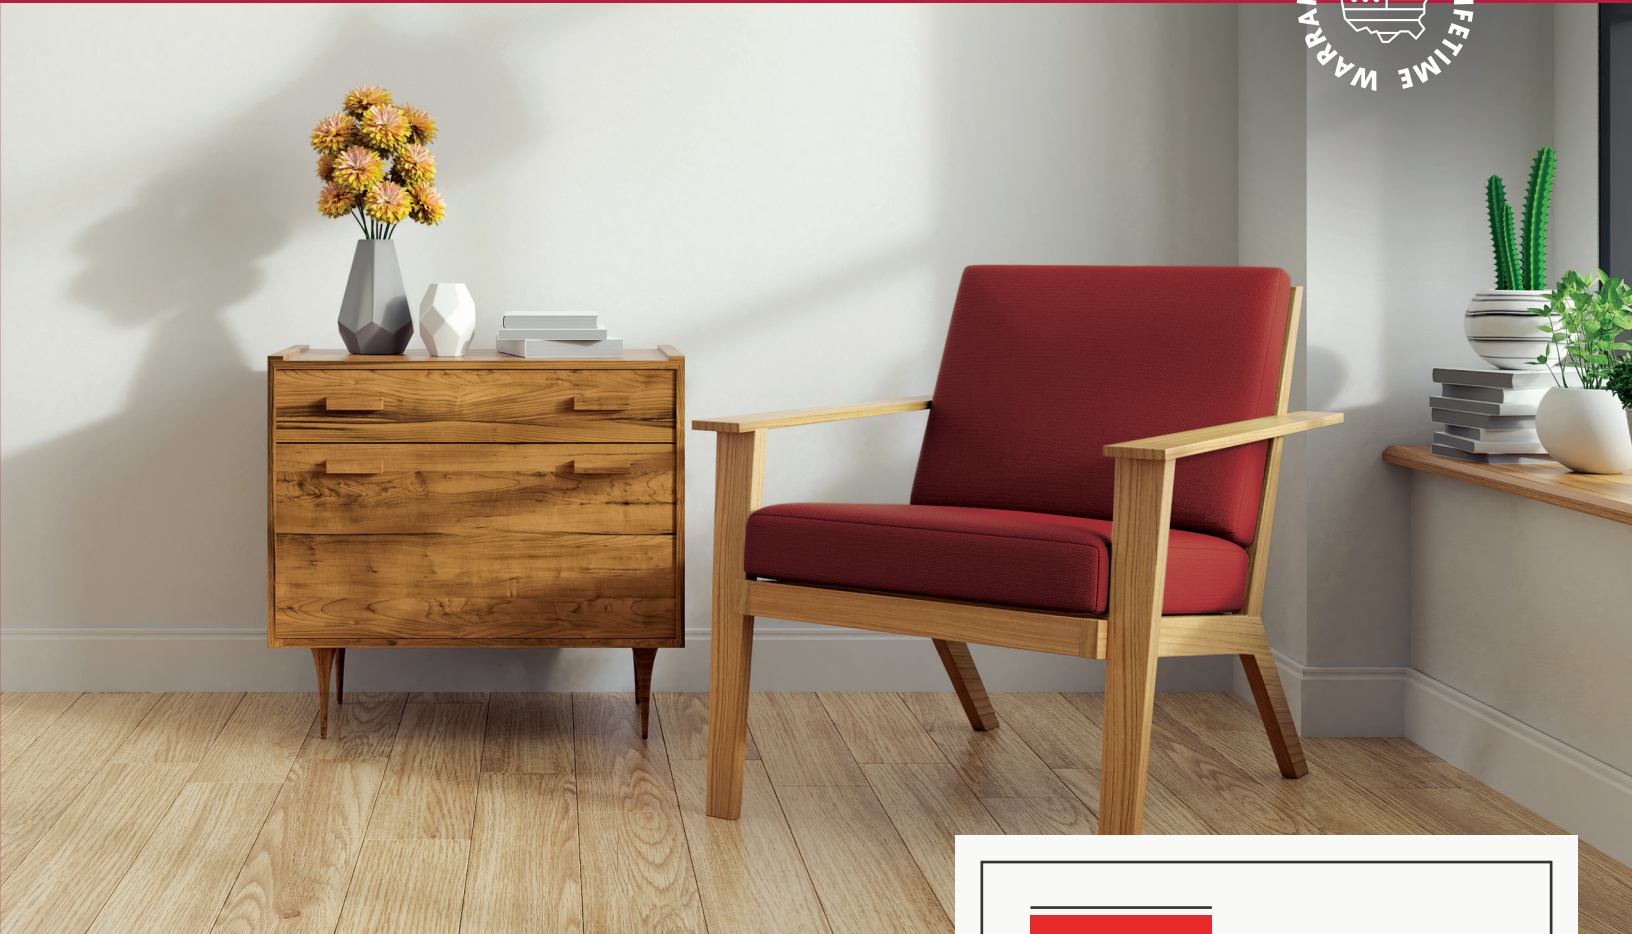

8 51312 00411 4

Item No. 0264250
600 Sq. Ft / Roll - 2mm x 48" X 150'
FLOORMUFFLER.COM

Manufactured by:
Diversified Industries.
121 High Hill Rd, Swedesboro, NJ, USA.
08085



The highest rated and most effective acoustic barrier on the market.

74 IIC **76 HIIC**
73 STC **25 ΔIIC**



Provides superior moisture protection.



Improves R-Value



Proprietary PP Core Technology to ensure the integrity of the tongues and grooves.



Surpasses the Indoor Air Quality emissions requirements..

*5mm thick or higher. Follow your Rigid Core Flooring Installation Instructions.
** For Glue Down installations, only use adhesives that have been tested by the adhesive manufacturer for installation of the FloorMuffler Underlayment.
Flooring systems protected under USPTO No. 8,276,338; 8,458,975 and 8,707,646

