


SAFAVIEH LIGHTING

Assembly Instruction

CAUTION: Read instruction carefully and turn electricity off at main circuit breaker panel before beginning installation.

ITEM#:PND4004A

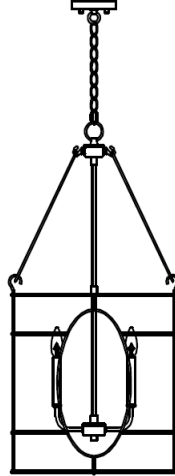

Care and Cleaning

To clean the outside of the fixture, use a dry or slightly dampened clean cloth(use clean water, never a solvent)to wipe the surface of the fixture.

To clear the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth(use clean water, never a solvent) to wipe the interior surface of the fixture

Do not use any cleaners with chemical, solvents or harsh abrasives. Use Only a dry soft cloth to dust or wipe carefully.

Estimated Assembly Time:30 minutes


Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Lamp Body		1X	G	Canopy Nut		2X
B	Lamp Assembly		1X	H	Canopy		1X
C	Bulb		4X	I	Mounting Screw		2X
D	Tube Threaded		2X	J	Mounting Plate		1X
E	Hanger		4X	K	Wire Nut		3X
F	Chain		1X				

Installation


Step 1

Unpack all parts from cartons carefully.
Connect Tube Threaded(D) to Lamp Assembly(B)

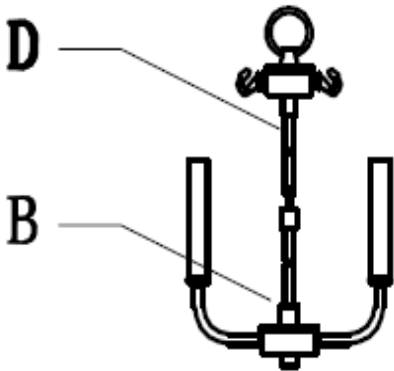


Step 2

Using Wire nut(K) to connect wires

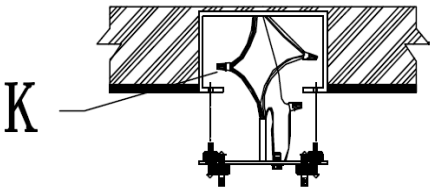

Step 3 Wire connection


Connect,Hot,Black or Red outlet Supply Wire to:	Connect,Neutral,White Outlet Supply Wire to:
Black	White
*Parallel Cord(round&smooth)	*Parallel Cord(square&ridged)
Clear,Brown,Gold or Black without Tracer(colored stripes)	Clear,Brwn,Gold or Black without Tracer(colored stripes)
Insulated Wire(not green)with copper metal conductor	Insulated Wire(not green)with Silver metal conductor



*Note: When parallel wire(SPTI&SPTII)is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth.(See illustration on left)


Grounding Instructions:

- a) For installation in the United States: Wrap ground wire from outlet box around green ground screw (F) on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.
- b) For installation in Canada: If fixture is supplied with ground wire, wrap ground wire around green grounding screw on mounting bracket. Tighten ground screw.




Step 4

Fix the Mounting Plate(J) to the junction box with Mounting Screw (I).

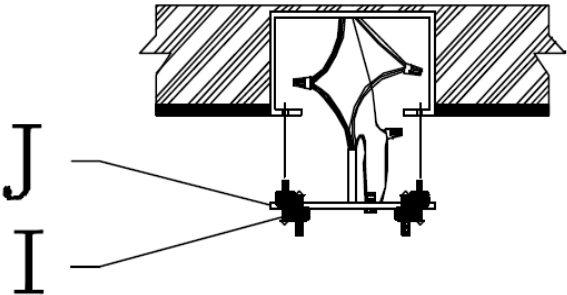

Step 5


Attach the Canopy(H) to the Mounting Plate (J) and fix it by turning the Canopy Nut (G) clockwise.

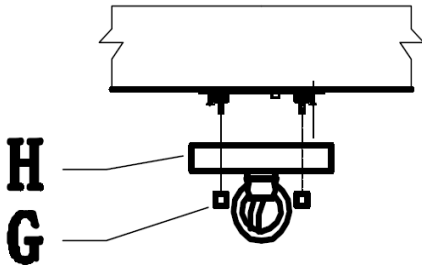

Step 6

Attach the Closable Link(F) onto the Hanging Loop at the bottome of Conapy(H)


Attach the Closable Link(F) onto the Hanging Loop at the top of Tube Threaded(D)

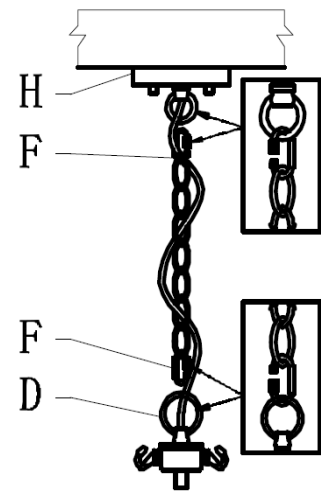

Step 7

Attach one end of Hanger(E) at the Tube Threaded(D)


Attach the other end of Hanger(E) at the Lamp body(A)

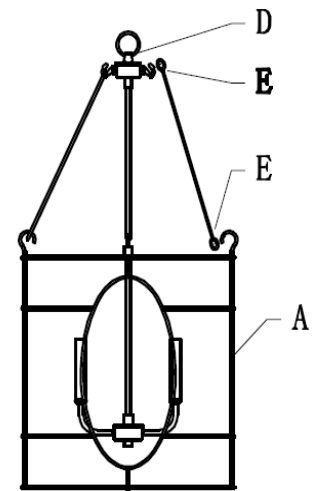

Step 8

Install bulbs (C) into the socket of Lamp Assembly(B).

Be sure to use bulb with wattage no greater than specified on this fixture

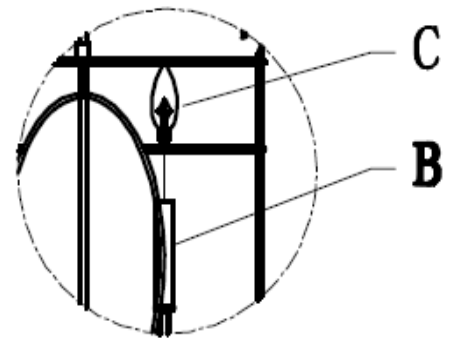

**PLEASE USE ON/OFF TYPE"B" BULB MAX 40-WATT
OR CFL BULB MAX 13-WATT OR LED BULB MAX 9-
WATT
THERE ARE 4PCS LED BULB 4-WATT LED BULB IN
THE BOX**

Step 9

Consult a qualified electrician to ensure correct branch circuit conductor

ENJOY YOUR LAMP