


Assembly Instructions


Caution : You must read this before you proceed

Please look in the inner box under the seat for hardware pack, armrests and front legs.



LOVESEAT

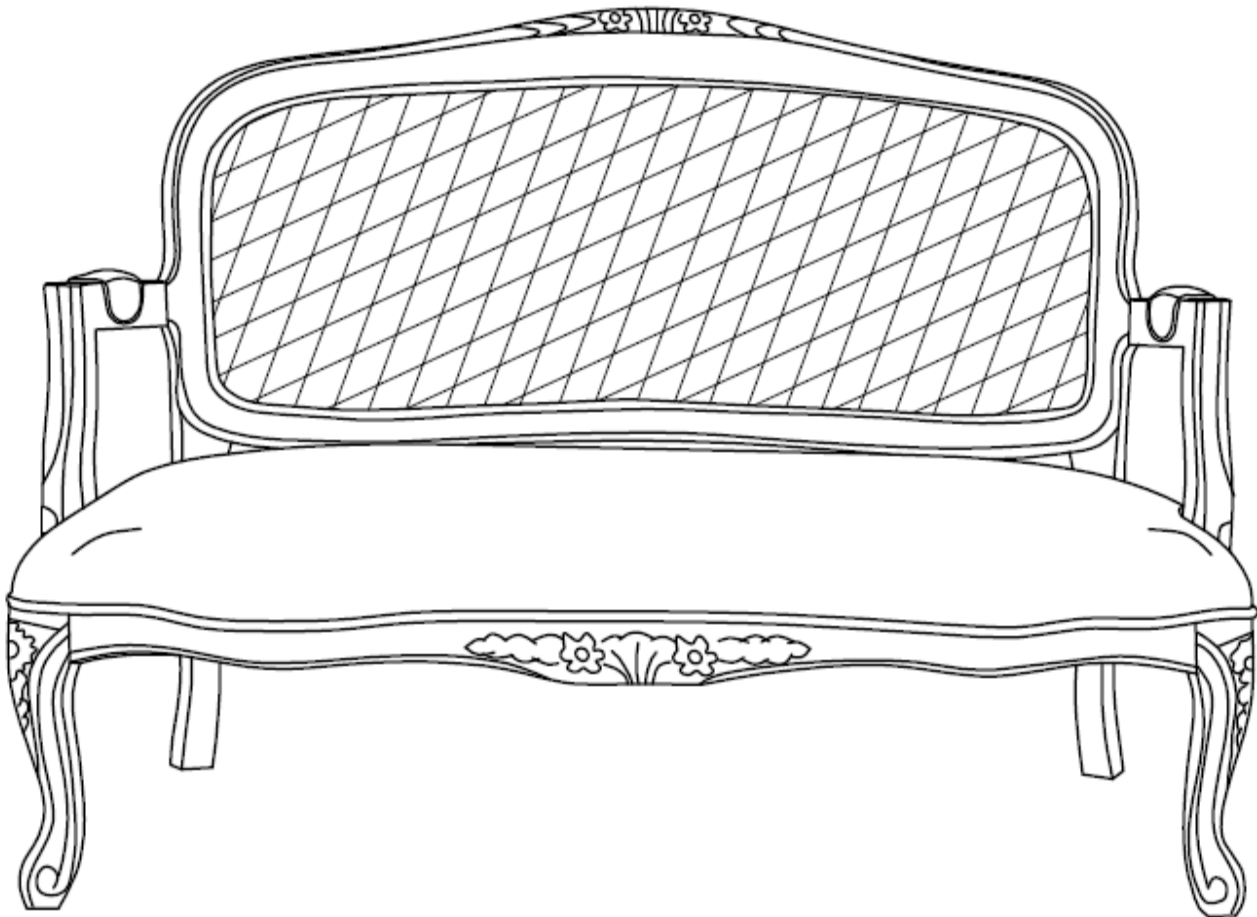

Parts List

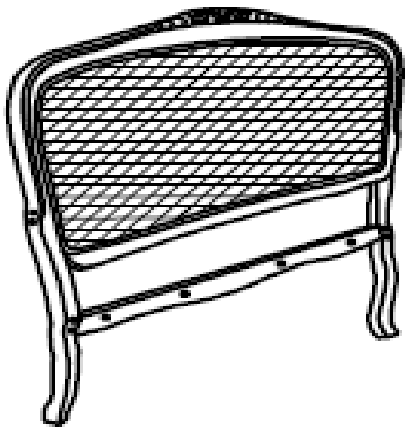
Label	Picture	Description	QTY
A		Back	1
B		Seat	1
C		Front Leg	2
D		Left Armrest	1
E		Right Armrest	1

Hardware

Label	Picture	Description	QTY
①		Bolt (M8*76MM)	5
②		Bolt (M8*63MM)	9
③		Bolt (M8*44MM)	3
④		Bolt (M6*51MM)	3
⑤		Spring Washer(M8)	17
⑥		Washer(M8)	17
⑦		Spring Washer(M6)	3
⑧		Allen Wrench(M8)	1
⑨		Allen Wrench(M6)	1
⑩		Wood Plug	2

Assembly Preparation

Before Beginning Assembly

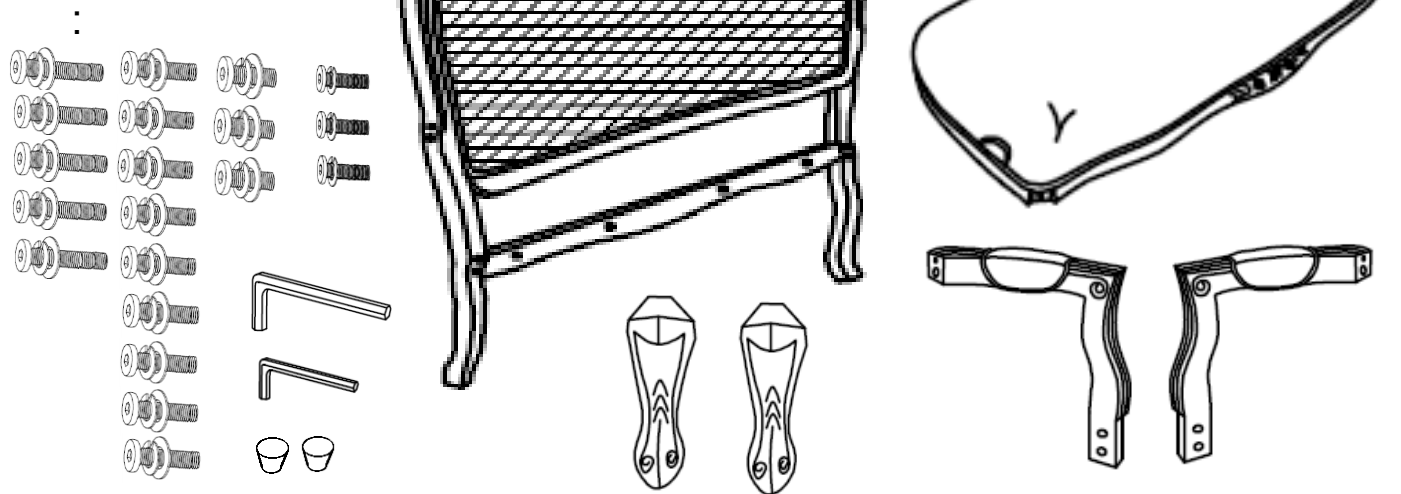

- Read instructions, cover to cover-



- Have 2 adults on hand for assembly-



- Do not assemble on flooring or carpet-




- Assemble on a clean non-marring surface (packing foam)-



- Save all packaging until finished-


Assembly Steps

Overview

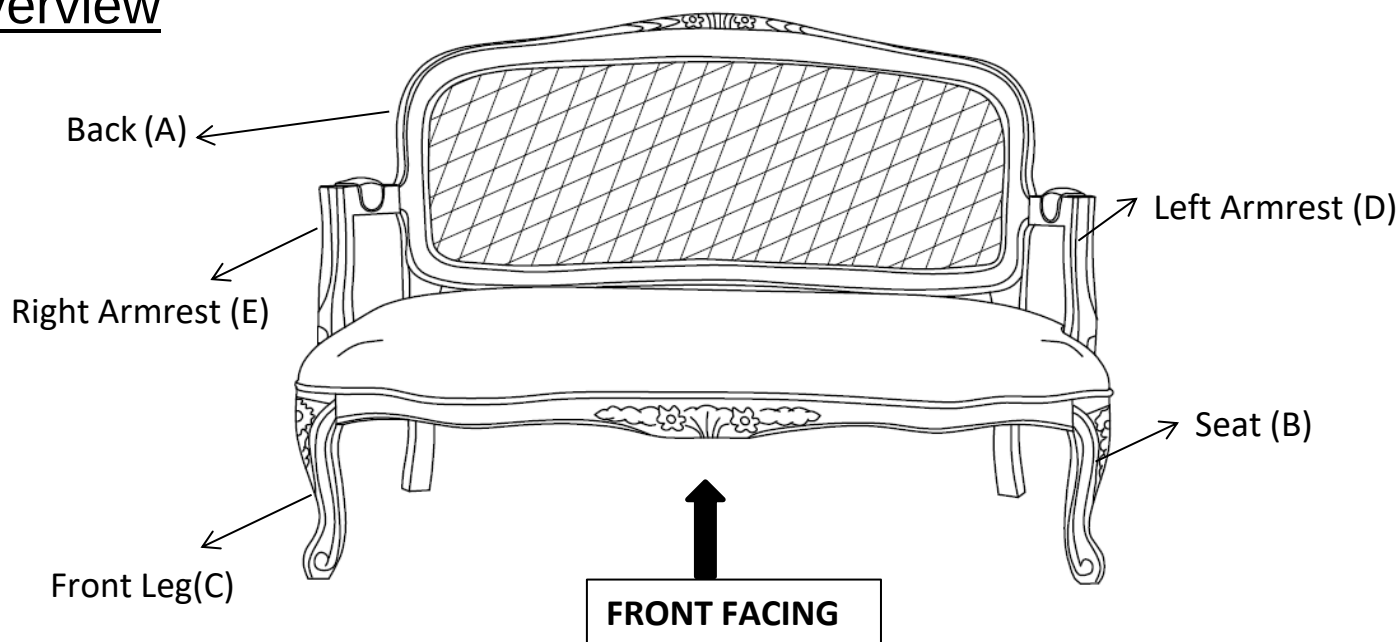


This Loveseat has multiple parts and may require up to 30 minutes to assemble. To give you an overview of the Loveseat parts, the above picture is to help you put the various parts into perspective. Please read through the instructions below to familiarise yourself with the parts and steps before assembly.

Step 1

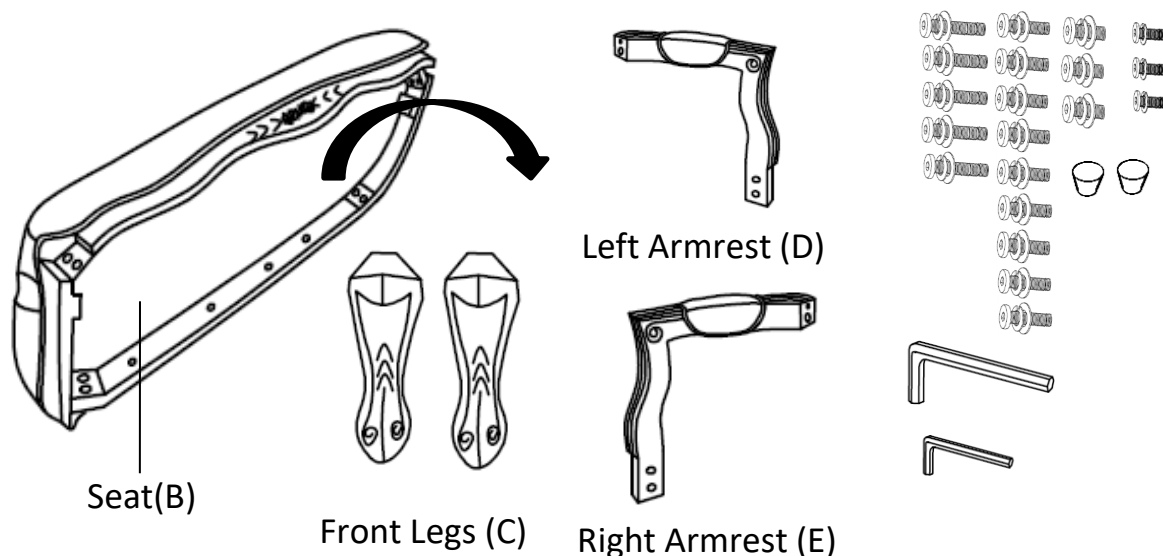


Place the Seat(B) on a clean, non-marring surface with the bottom facing you, as shown in picture above.
Remove the Legs, Armrests and Hardware.

Step 2

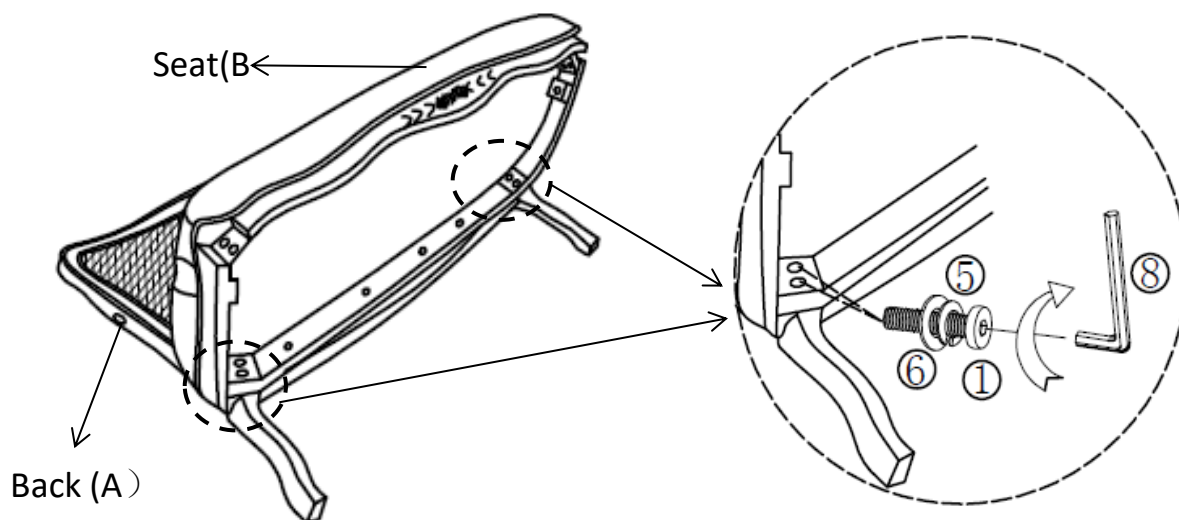


With the assistance from a second adult, attach the Seat(B) to the Back(A) using Bolts(①), Spring Washers(⑤) and Washers(⑥) with the Allen Wrench(⑧).
Do not fully tighten the Bolts.

Step 3

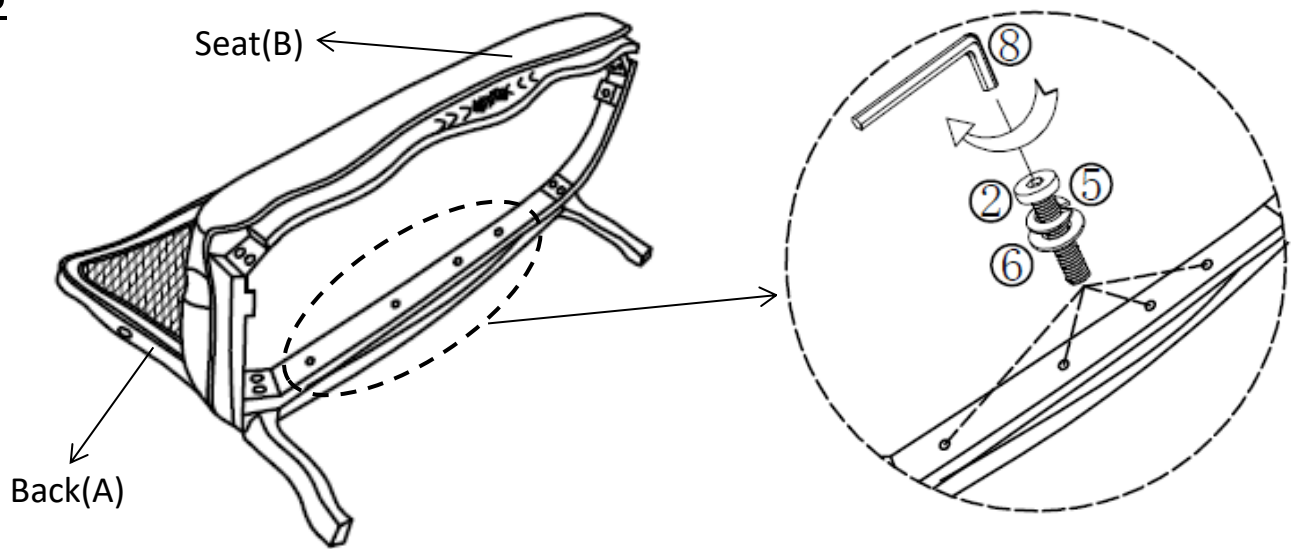


Tighten the other four mounting positions on the Seat(B) with Bolts(②), Spring Washers(⑤) and Washers(⑥) with the Allen Wrench(⑧).
Do not fully tighten the Bolts.

Step 4

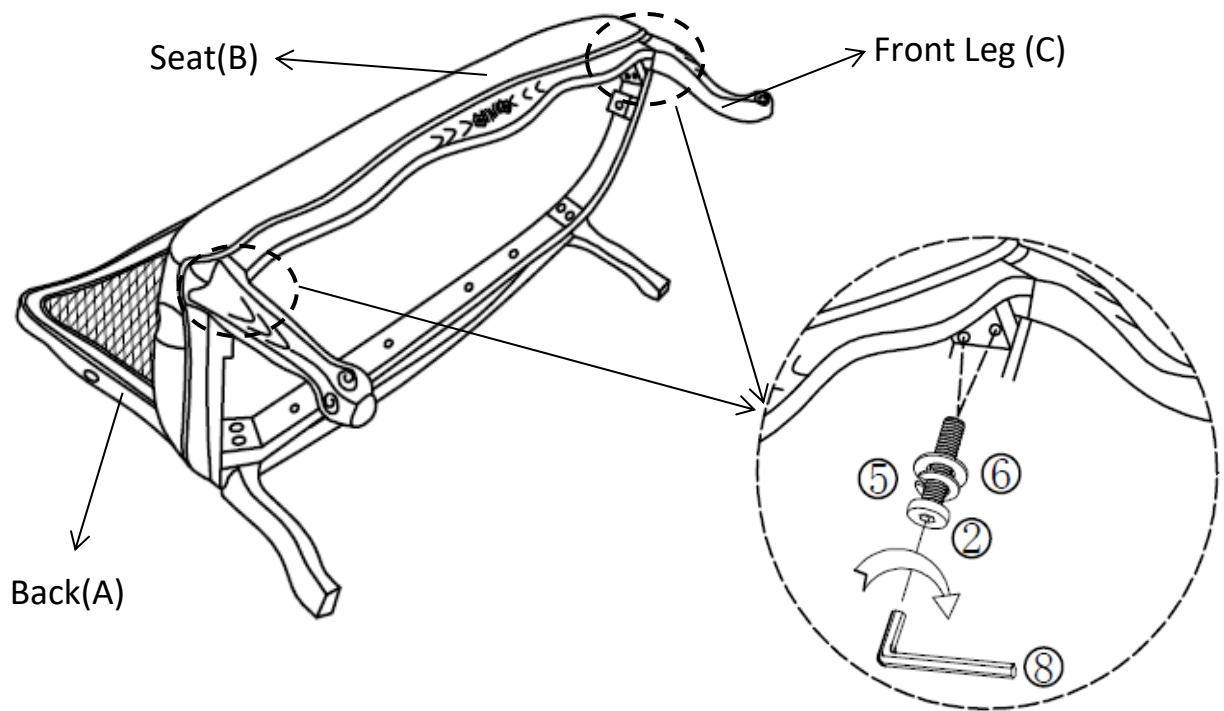

Attach the two Front Legs(C) to the Seat(B), using Bolts(②) Spring Washers(⑤) and Washers(⑥) with the Allen Wrench(⑧).
Do not fully tighten the Bolts.

Step 5

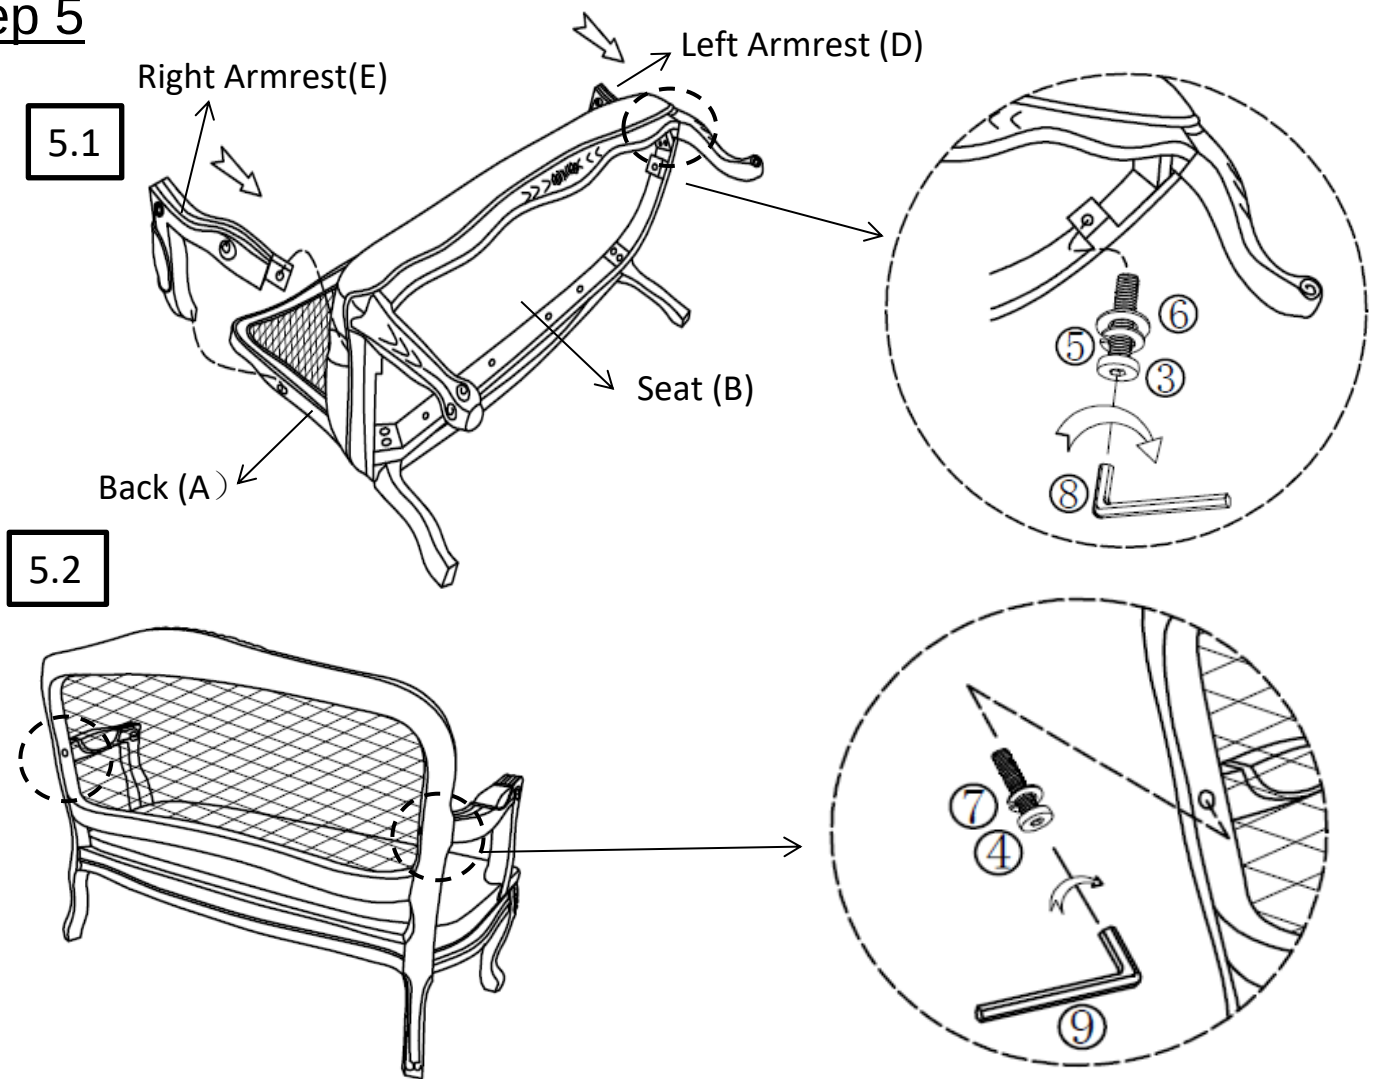


5.1: Attach the wood end of Left Armrest (D) and Right Armrest(E) to the bottom of Seat(B) using Bolts(③) Spring Washers(⑤) and Washers(⑥) with the Allen Wrench(⑧).

5.2: Attach the pad end of Left Armrest (D) and Right Armrest(E) to Back(A) using Bolts(④) Spring Washers(⑦) with the Allen Wrench(⑨) .

Do not fully tighten the Bolts.

Step 6

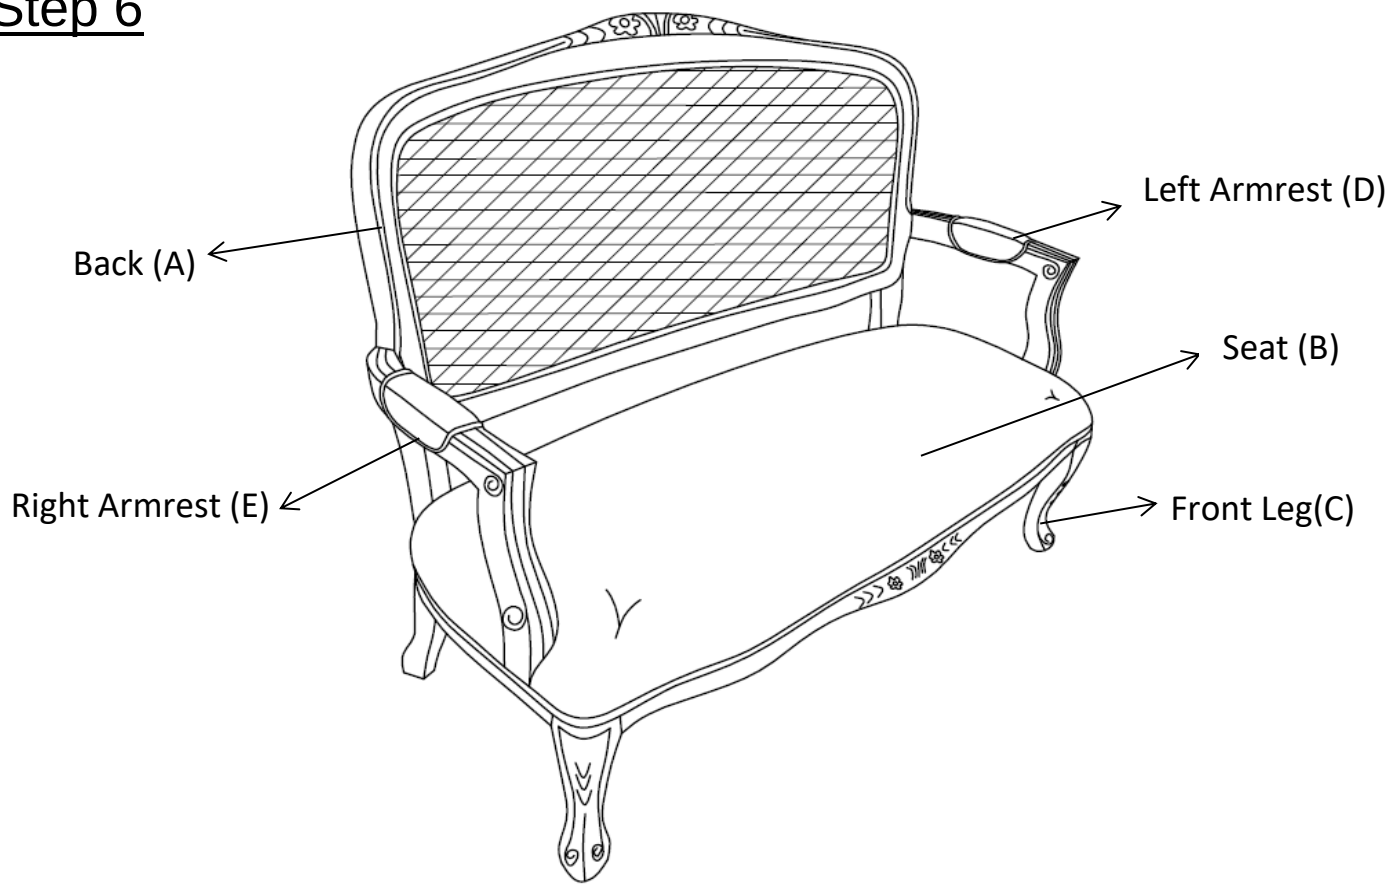

Test for Stability

Stand the Loveseat up.

Place the Loveseat on a **LEVEL SURFACE**.

Inspect it and make sure all parts are adequately connected.

Gently and carefully, sit on the Loveseat.


This will help to align all parts at all joints.

Then get off the Loveseat, and carefully place the Loveseat facedown.

Then proceed to tighten all Bolts at all joints in a sequential manner.


If there are any wobbles after tightening, loosen the Bolts and execute the same process.

Step 6

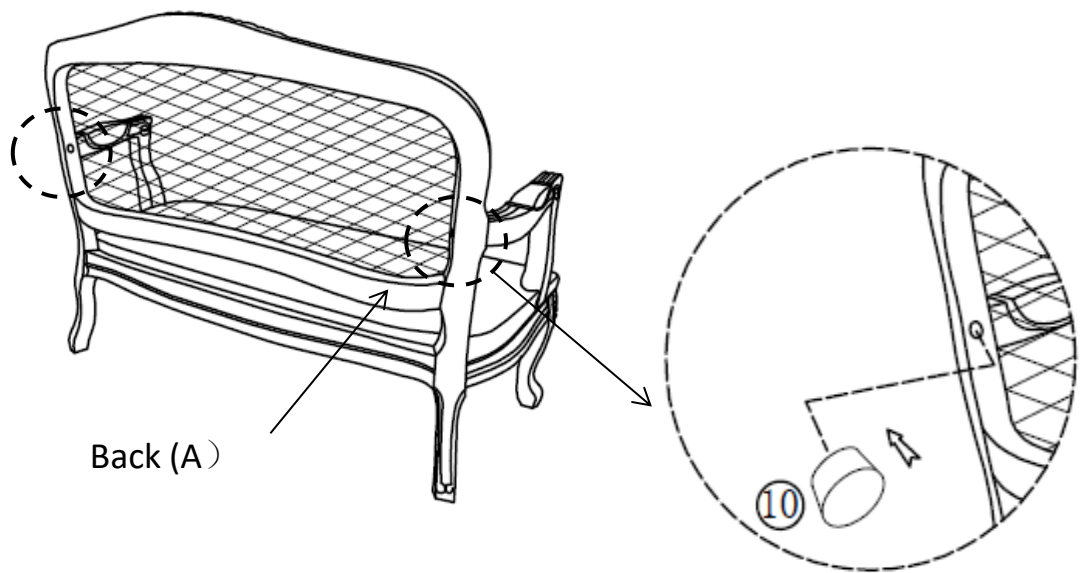

Attach Wood Plugs(10) into the mounting positions of Loveseat Back(A).

Step 7

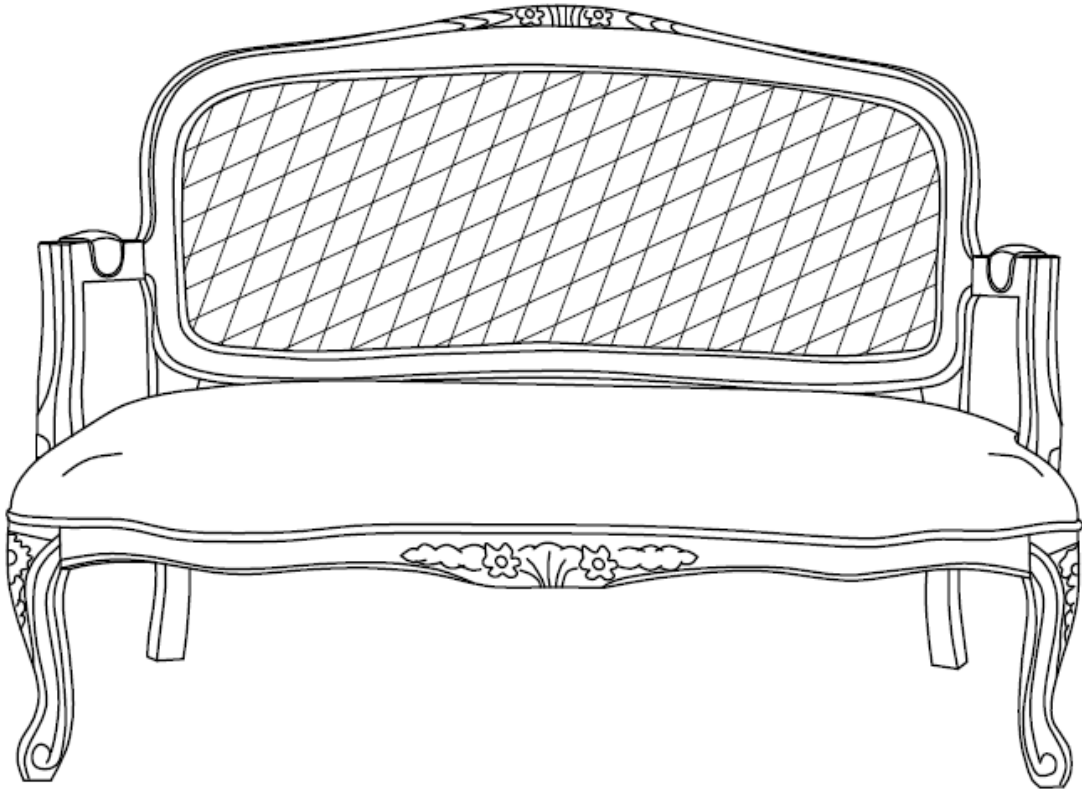

Your Loveseat is ready for use.

This Loveseat can only be used on a flat, level surface.

Care & Maintenance

-  Furniture may scratch floors. We recommend using furniture pads to protect your floors.
-  Do not put hot items directly on furniture surface.
-  Do not clean furniture with harsh cleansers or polish.
-  Do not place furniture under direct sunlight.
-  Do not place furniture near heating or cooling vents.
-  Do not write on furniture without a padded barrier to protect the surface.
-  Do not place furniture outside . For indoor use only.
-  Not for commercial use. For residential use only.
-  Stains may be removed with mild soap solution and damp cloth.
-  Children should not climb or jump on the furniture.

-  Dust and pick-up spills using a clean, non-colored, lint-free cloth.