


Backyard X-Scapes Peeled and Polished Reed blind is designed to be mounted inside or outside window frame.


OUTSIDE MOUNT

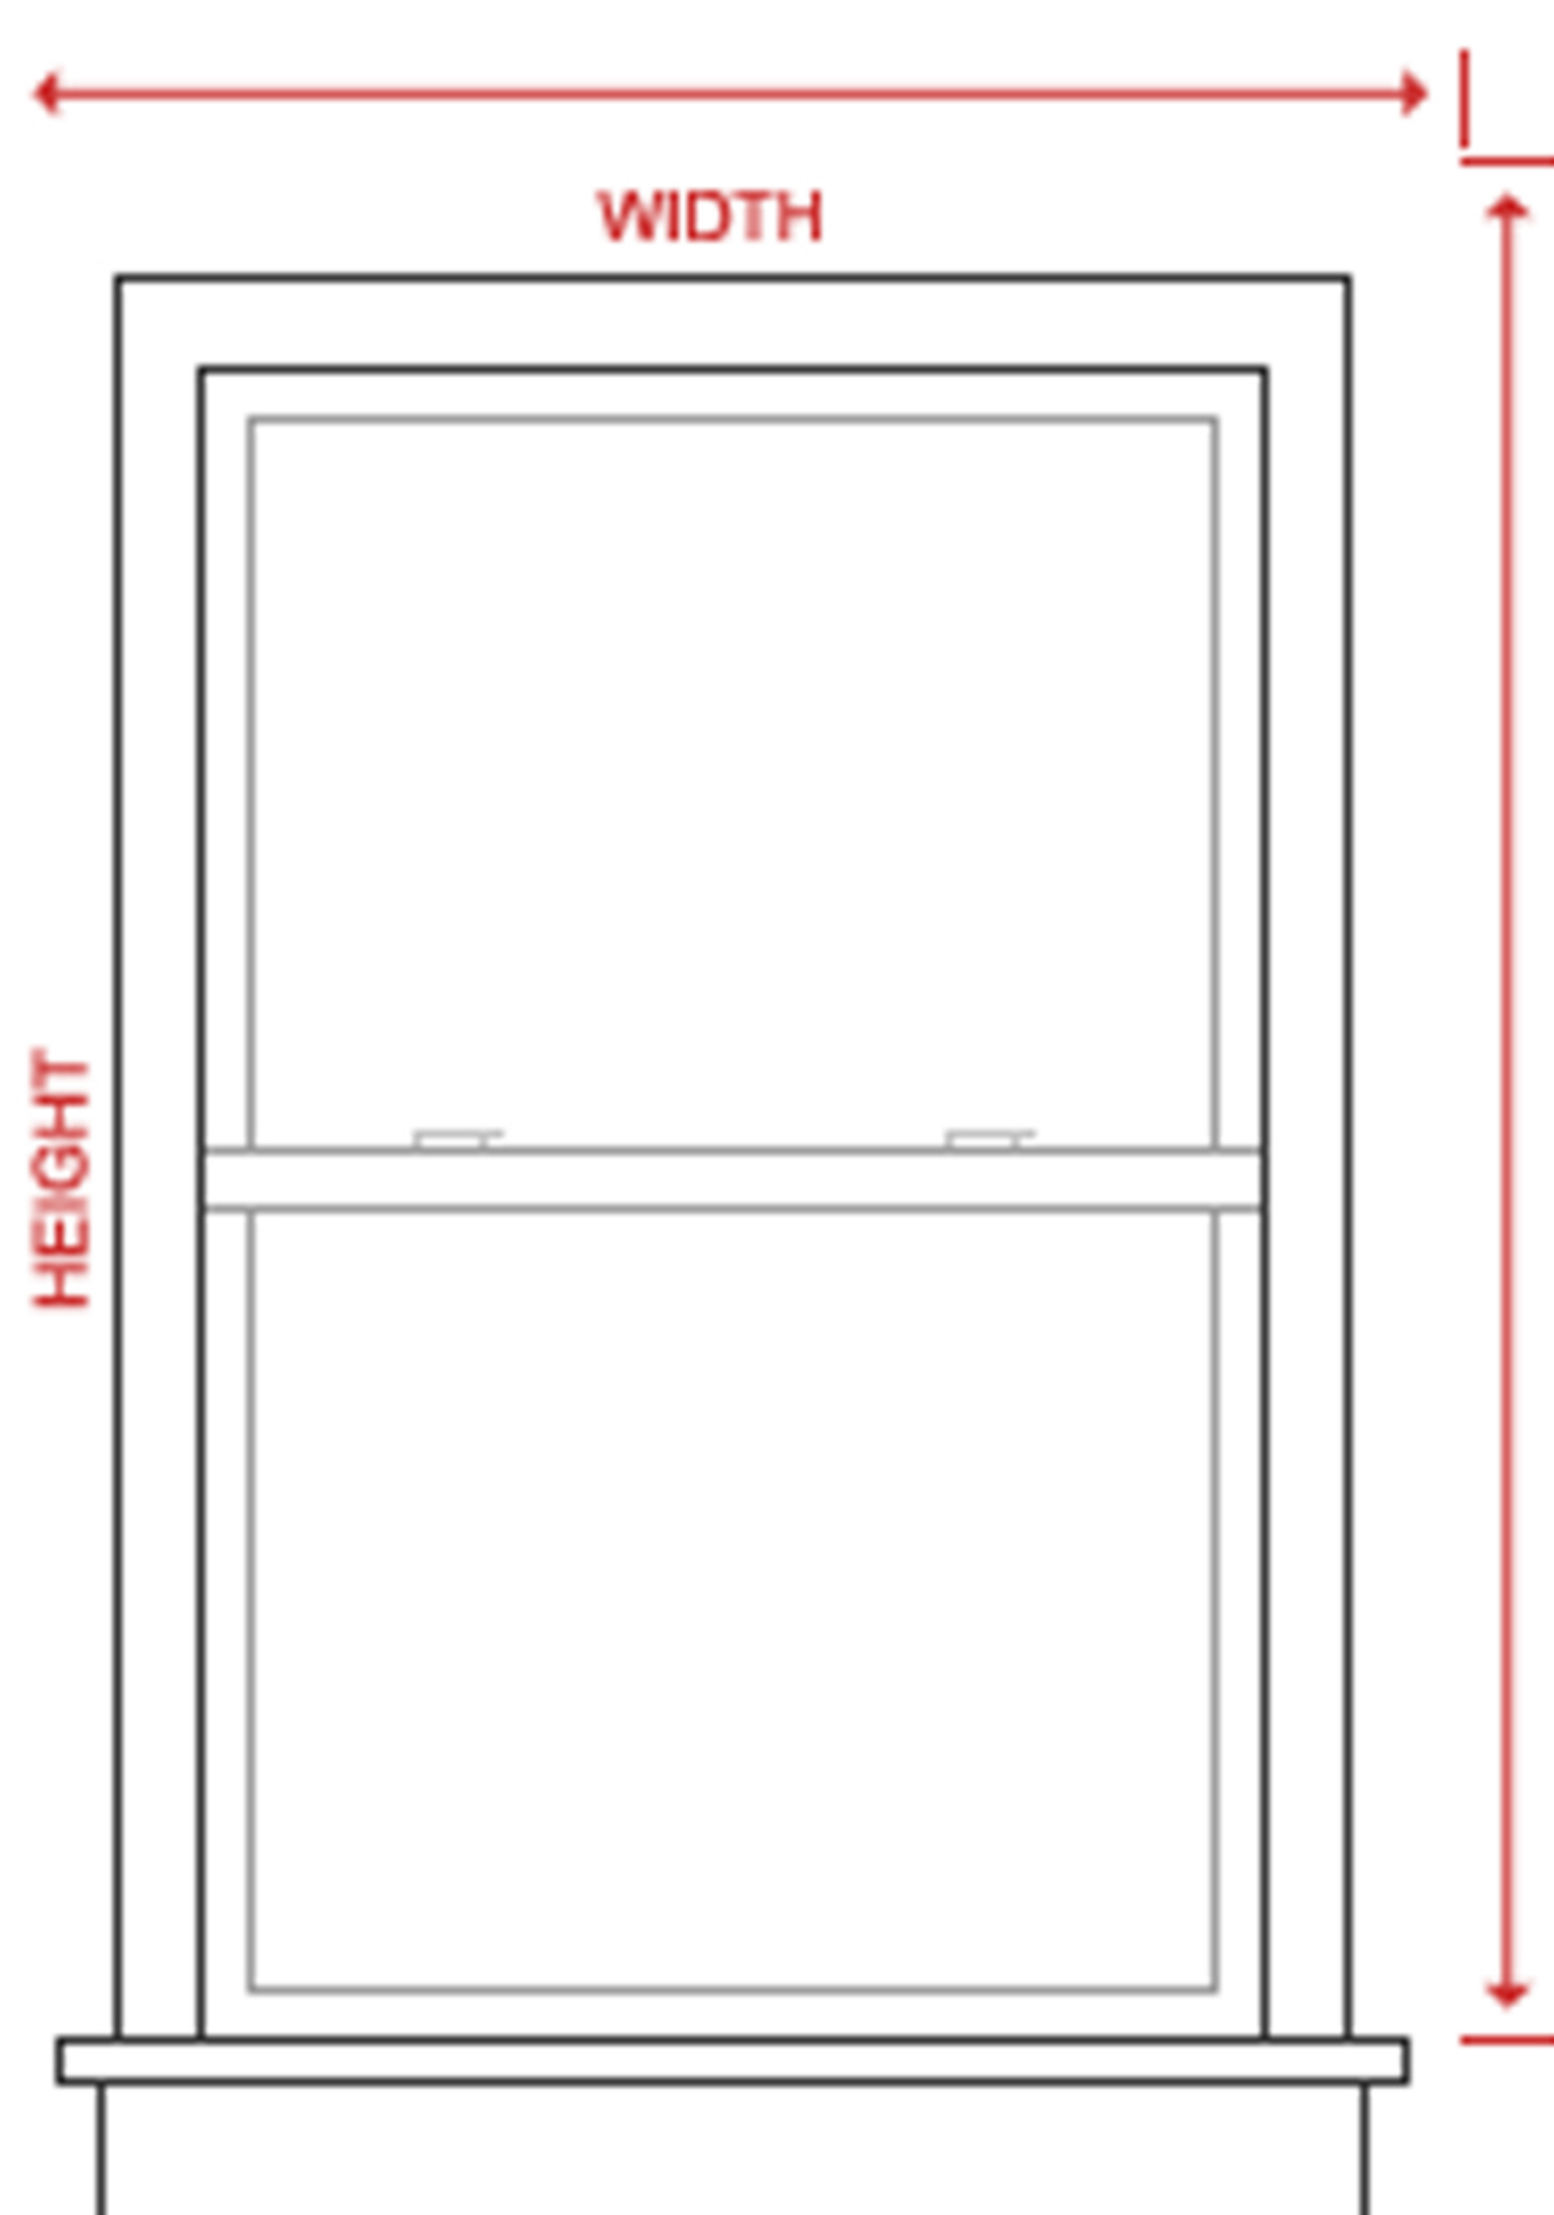

1) Measure the distance from the outermost points you would like the blind to cover. To minimize light leakage the blind should overlap the window opening by at least 1 1/2" on each side for a total of 3" on entire width.

2) Measure distance from where the top of the blind will be located to the window sill. The blind should overlap the window opening on the top by at least 1-1/2". Some products may require more than 1-1/2" above the window for mounting hardware. Please review product specifications on desired product for exact flat vertical surface area requirements. If flat vertical surface area exceeds 1-1/2" use specified amount to determine overlap above the window opening. If there is no window sill, measure to the point you would like the blind to reach.

INSIDE MOUNT

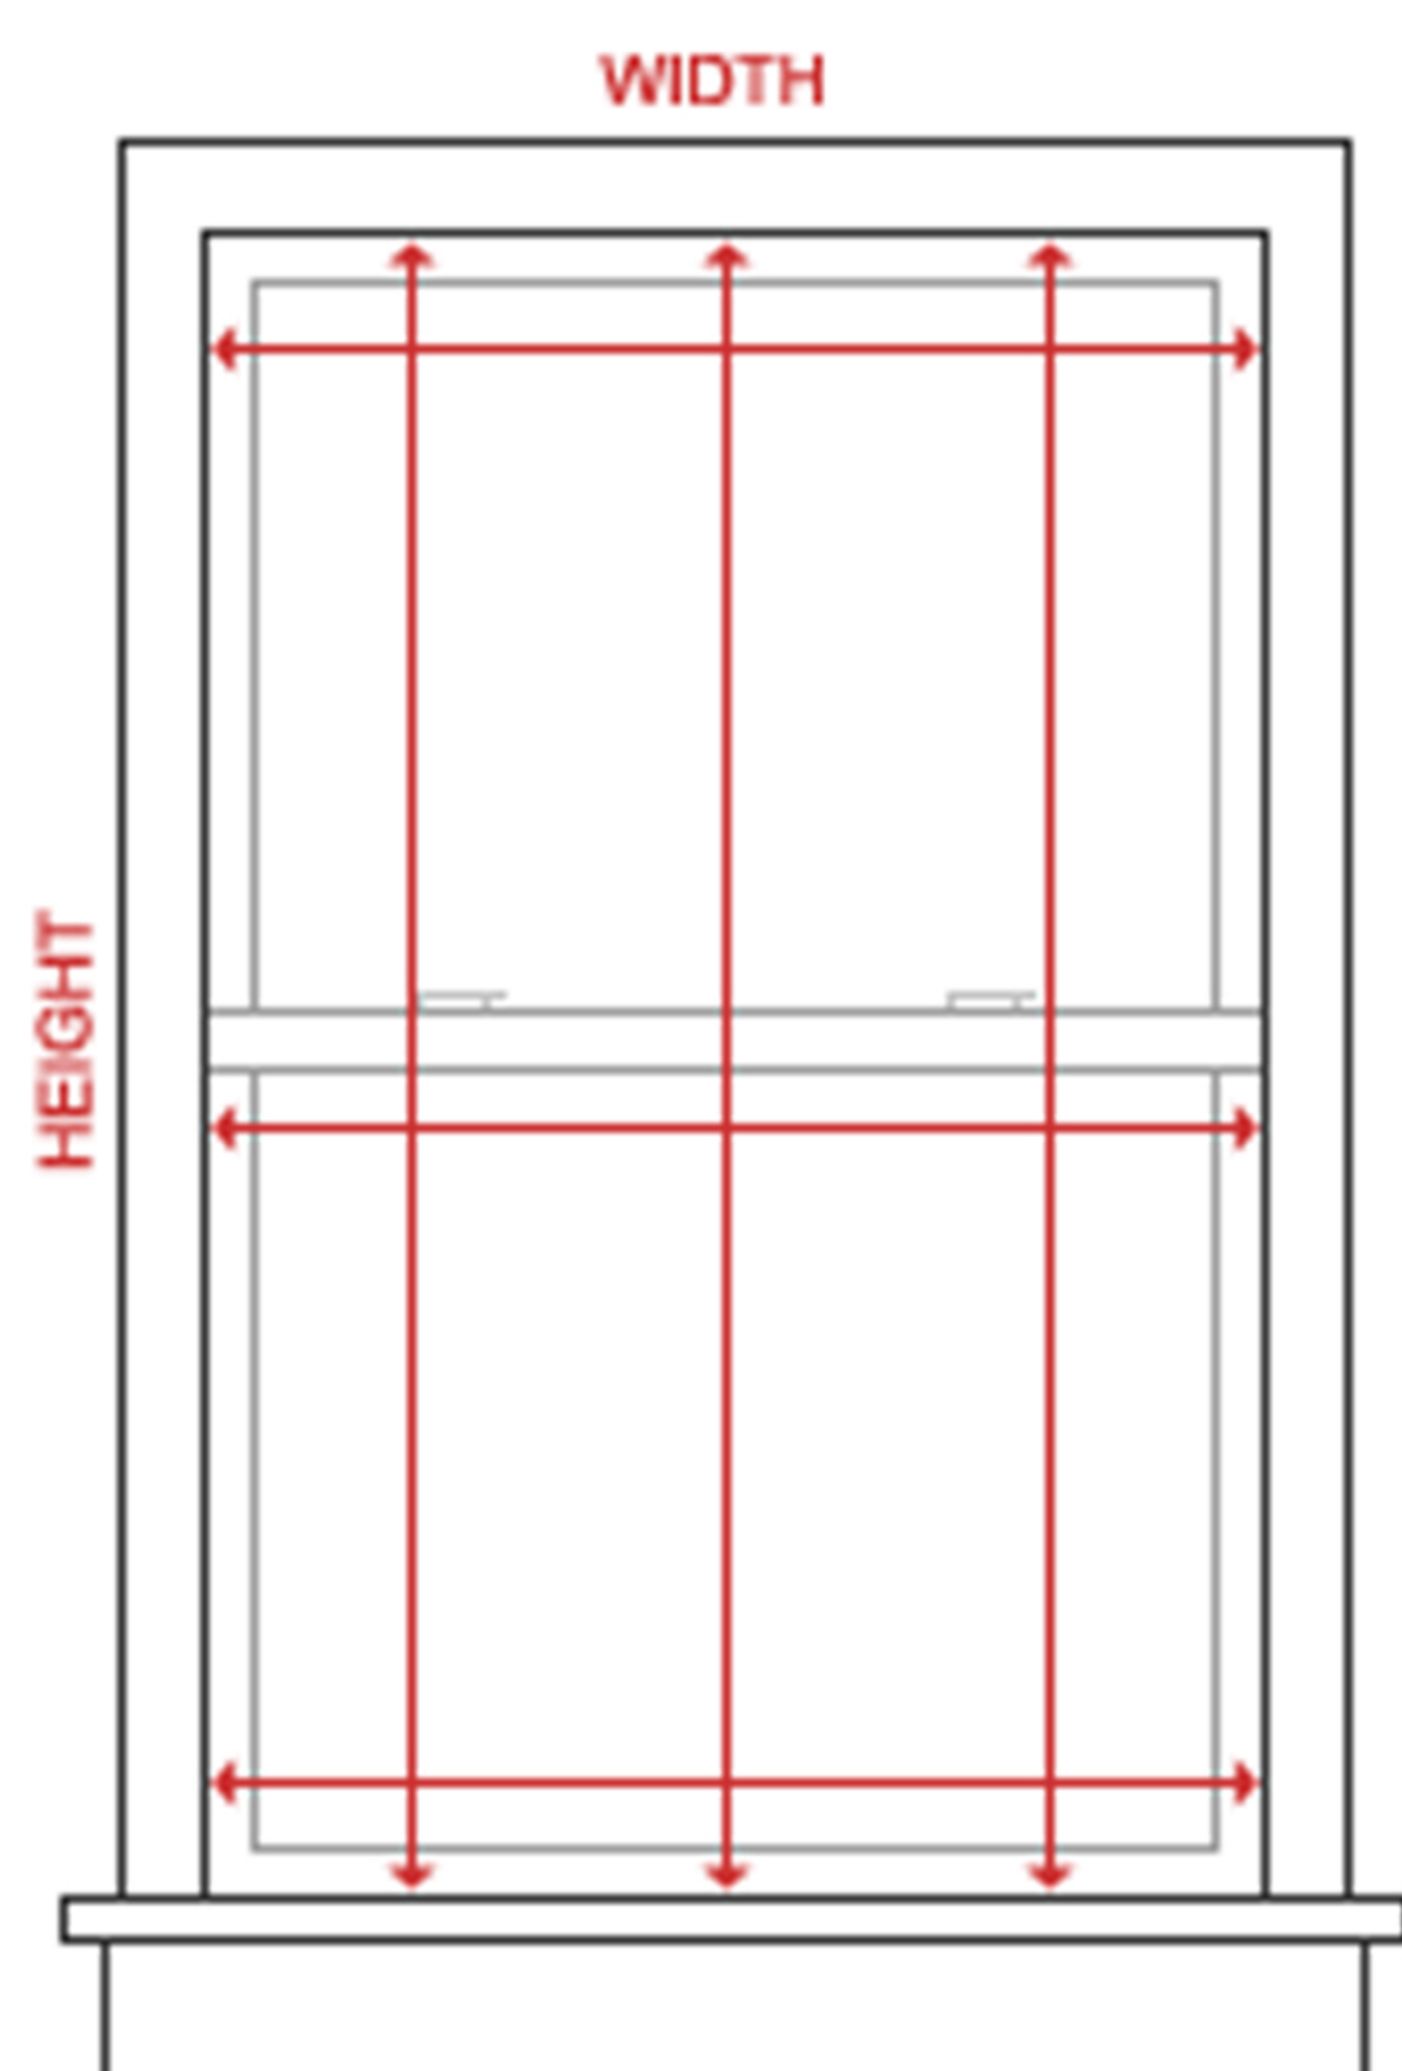

1) Measure the width inside the window opening at the top, middle and bottom. Take the narrowest of the three width measurements, and round down to the nearest 1/8".

2) Measure the height inside the window opening from the top of the window opening to the window sill three times. Measure once on the left, at the center, and on the right and take the longest of the three measurements. If you prefer to keep the blind from resting on the sill deduct a