


版式设计要求：

1. 字体：标题为Myriad Pro Bold，内容为 Myriad Pro Regular；
2. 标注包装盒长宽高等尺寸，单位mm.

240mm

120mm

Waterdrop

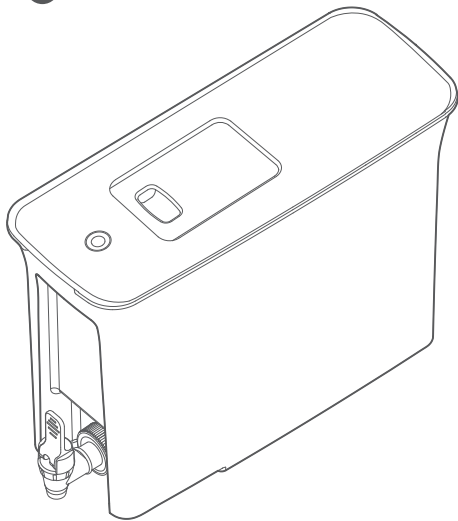

Dispenser filtration system
Owner's manual



Can TDS indicate the water quality?

TDS refers to Total Dissolved Solids, including all minerals such as sodium, calcium, magnesium, etc.

Milk	TDS:1000~3000
Milk powder	TDS:>2000
Coffee	TDS:150~400
Mineral water	TDS:200~500

TDS level does not fully indicate the quality of the water. It is improper to use TDS to measure the water filtered by this product. Only the Reverse Osmosis Filtration System can really lower TDS.

This product adopts coconut activated carbon to effectively adsorb contaminants and heavy metals while retaining beneficial minerals in the water.


Thank you for choosing our product

Our dispenser delivers clean, healthy and great-tasting water for you and your family by offering household water filters.

Contents

What's included in the system	5
Care and safety information	6
Getting started/Instruction for use	7
Change water filter	9
Change smart indicator	9
Technical specifications	9
Questions and Answers	10
3-month quality assurance	11

What's included in the system:

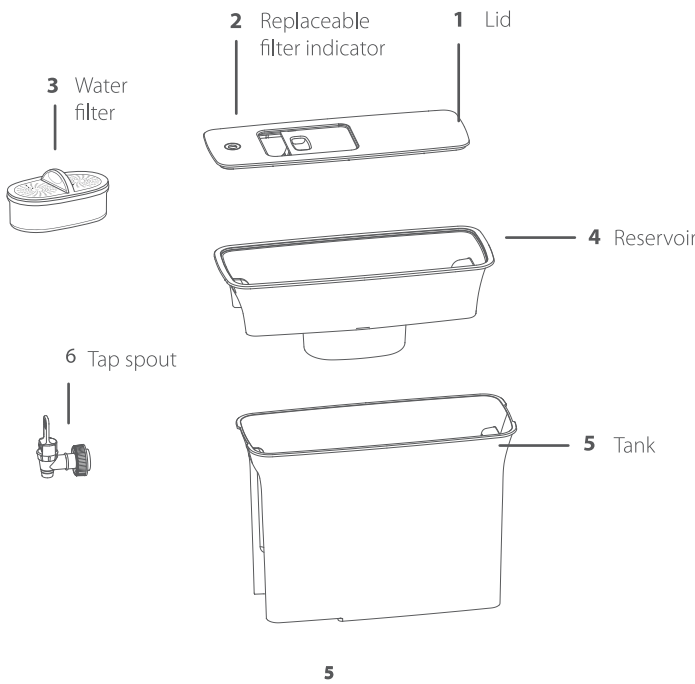

Care and safety information

- Use cold water only. The operating temperature of this dispenser filtration system is 41-100°F/5-38°C.
- Do not use with water that is microbiologically unsafe, or of unknown quality. This filter can not filter other liquids other than tap water.
- We recommend that you store your system in the refrigerator or in a cool area that is not in direct sunlight to get refreshing, great-tasting water.
- If the filter dries out, soak it in cold tap water for 10 minutes to remove bubbles before use to activate the filter and ensure the best filtration performance.
- If there is a lot of turbidity in tap water (such as cleaning the water tank or not using tap water for a long time), please flush it for a few minutes until the water turns clean before using.
- If the dispenser is not going to be used in a long time, please put it in a clean container with lid. Then place it in the refrigerator which will prolong the cartridge life.
- The filter must be protected from freezing, otherwise it might cause cracking and water leakage from the filter.



图像颜色请依据数码稿印刷
⚠ 请不要擅自变更来稿件，如须修改，请联系伊可普做有关决定

印刷品技术要求 IMPORTANT PRINTING CAUTION

1. 印刷要求 ☐覆光膜 ☐覆亚膜 ☐UV油 ☐吸墨油 ☐过油 ☐丝印
2. 材质要求 80g双胶纸折叠
3. 颜色要求 单色印刷
4. 版面要求 印刷品文字线条印迹清晰、无重影；印刷品套印准确无偏色、溢墨、指痕等；印刷品上光层均匀、光亮、牢固无粘连；覆膜表面平整、无褶皱、光泽度好；纸张材质正确，切边整齐、压线深浅适中、洁净、无斑点和条痕。



伊可普

青岛伊可普电器有限公司包材设计图纸

品牌 BRAND NAME	Waterdrop	工厂型号 ITEM NO.	ECF-7040
物料编码 INNER CODE		版本号 VERSION	V001
包材文件名称 FILE NAME	WD-WFD-40L-A-说明书-V001		
规格 MEASURE	120*240mm	页数 PAGE	12P
设计负责人 DWG BY	张鑫龙	审核日期 VERIFY DATE	
变更日期 REVMSNS	无		
描述 DESCRIPTION	暂无		

版式设计要求：


1. 字体：标题为Myriad Pro Bold，内容为 Myriad Pro Regular；
2. 标注包装盒长宽高等尺寸，单位mm.

120mm


240mm

Getting started (Instruction for use)

Step 1.
Wash your hands, then insert the tap spout into the tank. Keep the tap spout upright and install it to the dispenser by rotating accessory A.
Note: Install it in place to ensure the seal. If there is water leakage between the tap spout and the tank during use, simply tighten the accessory A. [Figure 1.1]




Step 2.
Take out the filter from the package.
Step 3.
Please soak it in cold tap water for 10 minutes to remove bubbles before use to activate the filter and ensure the best filtration performance. [Figure 1.2]




Step 4.
Hand-wash dispenser, lid and reservoir with a mild detergent. Don't put it in the dishwasher or use abrasive cleaners. Rinse thoroughly with water after use.

Step 5.
Install filter into reservoir. Press firmly to ensure a tight seal. [Figure 1.3]



Step 6.
Fill the reservoir with cold tap water. Discard the first two reservoirs of filtered water.

Step 7.
Hold the button for 5 seconds until the blue light flashes to activate the indicator. [Figure 1.4]
Note: Repeat this step after each new filter replacement.



Status	Indication light	Remaining life(day)
Good Blue	Blue stay on for 5 seconds	>10
Replace soon Red	Red flash 6 times	≤10
Replace now Red	Red stay on for 10 seconds	≤0


When you have filtered 100 gallons of water or the smart indicator red light is on, whichever comes first, you should change your filter.

Change water filter

Water filter replacement consult steps 2 to 7

Change smart indicator


The filter smart indicator is replaceable. Replace it by squeezing the clamping jaw. [Figure 1.5]



During the reinstallation, make sure that the clamping jaw is inserted into the groove completely.

Correctly dispose of the smart indicator

If the battery expires, dispose the indicator according to all applicable provision and regulation.



Technical specifications

Filter capacity:
100 gallons (378.5 liters)/2 months
Weight: 3.2 lbs (1.5kg)
Size: 14 x 9.8 x 5.6 inches
Flow rate: 0.1-0.2 gpm/0.4-0.8 lpm
Faucet flow rate: 0.5-0.7 gpm/1.8-2.7 lpm
Temperature: 41-100°F/5-38°C

Questions and answers

Q: Why does the water flow get slow?

A: The filter cartridge may be clogged. Please check the indicator to see if it's time to change the filter cartridge. If yes, please replace the filter cartridge immediately. If not, take out the filter and shake it intensely in order to shift the granules inside, which will improve the speed of water flow.

Q: What will be the pH level after filtration?

A: Generally speaking, it can be adjusted to 8.0-9.5, which is related to the quality of the raw water.

Q: My filter indicator is not working, I cannot see the color of the indicator!

A: The battery might be out of power. Do not worry, because the filter indicator is replaceable. If it's in the warranty period, we can replace it for free.

Q: Why doesn't the TDS value be reduced after filtration?

A: TDS stands for total dissolved solids. It is composed of inorganic salts and a small amount of organic matter. This filter cannot reduce the TDS value because it can remove harmful substances while keeping beneficial trace elements such as potassium, sodium, magnesium, and calcium, which can increase the TDS value. Please choose our RO system if you are looking for reduction of TDS.

3-month quality assurance

We promise your water filter system for 3 months from the date of purchase (except for the filter cartridge which is assured for 30 days) against all defects in materials and workmanship, when used in compliance with the owner's manual.

If the product proves to be defective within 3 months from the date of purchase, please contact our customer service. During the quality assurance period, we will replace or repair any part which is deemed to be defective, if product has not been subjected to tampering, alteration or improper use after delivery, and has not been repaired by the manufacturer.

The product is not promised against misuse, use in abnormal operation temperature conditions, conditions outside listed operating parameter or use in commercial operations.

If you have any further questions, please call us for free **1-888-352-3558 (U.S.)**. Our professional team will take care of your problem timely.

Waterdrop

Manufacturer Technical Support
Tel: 1-888-352-3558 (U.S.)
E-mail: service@waterdropfilter.com

Made in China V001
Qingdao Ecopure Filter Co., Ltd.



图像颜色请依据数码稿印刷
请不要擅自变更来稿件，如须修改，请联系伊可普做有关决定

印刷品技术要求 IMPORTANT PRINTING CAUTION

- 印刷要求 ☐覆光膜 ☐覆亚膜 ☐UV油 ☐吸墨油 ☐过油 ☐丝印
- 材质要求 80g双胶纸折叠
- 颜色要求 单色印刷
- 版面要求 印刷品文字线条印迹清晰、无重影;印刷品套印准确无偏色、溢墨、指痕等;印刷品上光层均匀、光亮、牢固无粘连;覆膜表面平整、无褶皱、光泽度好;纸张材质正确,切边整齐、压线深浅适中、洁净、无斑点和条痕。



青岛伊可普电器有限公司包材设计图纸

品牌 BRAND NAME	Waterdrop	工厂型号 ITEM NO.	ECF-7022
物料编码 INNER CODE		版本号 VERSION	V001
包材文件名称 FILE NAME	WD-WFD-40L-A-说明书-V001		
规格 MEASURE	120*240mm	页数 PAGE	12P
设计负责人 DWG BY	张鑫龙	审核日期 VERIFY DATE	
变更日期 REVISONS	无		
描述 DESCRIPTION	暂无		