


QUIETWALK®

PREMIUM NOISE CANCELING UNDERLAYMENT
& WATER DEFENSIVE BARRIER

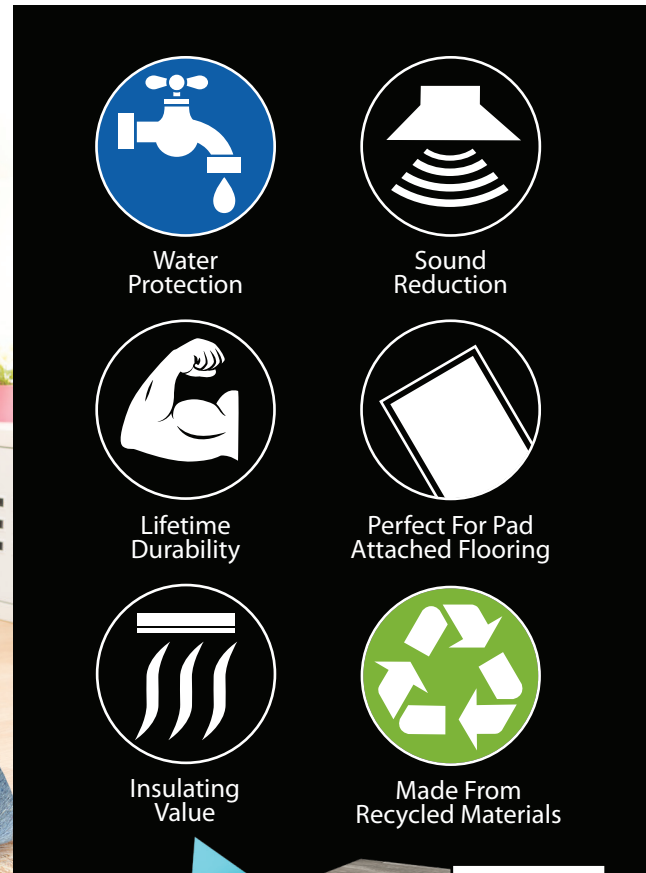

Water protection.

QuietWalk uses an advanced water management system to protect flooring from both top and bottom side water!



FEATURING **DRI-WICK** EXCLUSIVE TECHNOLOGY

Water Vapor
Vapor Barrier
Recycled Fiber Pad
with antimicrobial treated fibers!
Concrete Subfloor



View Installation
Videos and Tips at
QuietWalk.com/install

- **DIMENSIONS**
3 mm thick x 3 ft wide x 16.67 ft long
- **SOUND INSULATION**
IIC 71 STC 66 Delta IIC 25
- **MOISTURE VAPOR EMISSIONS**
5 lbs / 1000 sq ft / 24 hours
- **THERMAL INSULATION**
R-Value 0.58
- **SMOOTHING**
2.5 mm
- **COMPRESSION STRENGTH**
85.5 PSI

Installation Friendly - Built in Seam Seal!



SAFETY & ENVIRONMENT

- Odorless, Zero VOCs
- Antimicrobial Protection
- Approved for use with radiant heat systems
- Made from 94% recycled materials
- LEED compliant



MPglobal
2500 Old Hadar Road | Norfolk, NE USA



QW50B1LT

QUIETWALK®

PREMIUM NOISE CANCELING UNDERLAYMENT
& WATER DEFENSIVE BARRIER

For Use Under

- Laminate Flooring
- Hardwood Flooring

*Enhanced performance
for pad attached flooring

FEATURING  EXCLUSIVE
DRI-WICK
TECHNOLOGY



View Installation
Videos and Tips at
QuietWalk.com/install

Delta Δ IIC 25
IIC 71 • STC 66

*for floating engineered wood over 6
inch concrete with suspended ceiling

All wood and concrete subfloors must
be flat within 1/8" over a 6' span, or
3/16" over a 10' span. All areas must
be checked prior to installation.

Toda la madera y los subsuelos concretos
debe ser plana en más de 1/8" a 6" span o
3/16" durante un lapso de 10'. Todas las áreas
deben ser verificados antes de la instalación.

INSTALLATION INSTRUCTIONS

1. Be sure the subfloor surface is clean and dry*.
2. Roll QuietWalk Underlayment over the subfloor with the vapor barrier film (imprinted side) facing up.
3. The perimeter edges of QuietWalk Underlayment need to be 1/2 to 3/4 inches away from the wall.
4. Seams need to be butted together flush, do not overlap the pad. Tape the seams with duct tape, unless the roll is provided with a factory attached lip and tape system.
5. Install laminate flooring according to the manufacturer's installation instructions.

* In geographic areas where concrete slabs are subject to excessive moisture, a calcium chloride moisture test is required. Vapor emission readings in excess of 5 lbs. per 1,000 square feet in 24 hours will require additional protection such as a concrete sealant or polyethylene sheeting.

NOTE: All rolls of QuietWalk Underlayment are cut to a minimum of 50 square feet. The average thickness of QuietWalk Underlayment is .125 of an inch. The average weight of a roll is 6.5 lbs.

Due to the nature of our manufacturing process and the use of recycled materials, the pad thickness may vary .02 of an inch plus-or-minus. Actual weight of each roll may also vary 1.2 lbs. plus-or-minus. While it may appear that one roll is slightly larger than another, we guarantee this slight variance DOES NOT affect the coverage area nor the sound absorption benefits of the product.

INSTRUCCIONES DE INSTALACIÓN

1. Sea seguro que la superficie del subfloor es limpia y seca *.
2. Ruede QuietWalk Underlayment sobre el subfloor con los revestimientos de la película de la barrera del vapor (cara impresa) para arriba.
3. Los bordes del perímetro de QuietWalk Underlayment de ser 1/2 a 3/4 pulgada lejos de la pared.
4. Las costuras deben ser topado junto a ras, no se solapan con la almohadilla. Tape las costuras con cinta adhesiva, a menos que el rollo se suministra de fábrica con un sistema de cinta de labio y adjunto.
5. Instale el suelo laminado según las instrucciones de instalación del fabricante.

* En áreas geográficas donde están las losas concretas conforme a la humedad excesiva, se requerido una prueba de la humedad del cloruro de calcio. Las lecturas de la emisión del vapor en el exceso de 5 libras por 1.000 pies cuadrados sobre 24 horas requerirá la protección adicional tal como cubrir concreto del sellante o del polietileno.

NOTA: Todos los rollos de QuietWalk Underlayment se cortan a un mínimo de 50 pies cuadrados. El grosor medio del underlayment QuietWalk es .125 de pulgada. El peso promedio de un rollo es de 6.5 libras.

Debido a la naturaleza de nuestro proceso de fabricación y la utilización de materiales reciclados, el espesor de la pastilla puede variar de .02 de pulgada más o menos. El peso real de cada rodillo también pueden variar de 1,2 libras más o menos. Aunque pueda parecer que un rollo es ligeramente más grande que el otro, garantizamos esta ligera variación no afecta a la cobertura ni la absorción acústica beneficios del producto.

MPglobal™

MP Global Products, LLC
P.O. Box 2283 | 2500 Old Hadar Road | Norfolk, NE 68702-2283
402.379.9695 | 888.379.9695 | Fax 402.379.9737
www.quietwalk.com

NALFA
QUALITY CERTIFIED
LAMINATE FLOORING

