

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

V1-**DW Speedi Plumb® Vinyl Dishwasher Connector - Compression Inlet

Use: For use in potable water distribution systems in accessible locations only

Design Features:

- **No kink hose.** The specially engineered reinforced PVC hose provides unique flexibility to prevent kinking and crimping
- **Greater strength and durability** with a tighter weave and two-layer bonded construction, outperforms conventional vinyl connectors
- **Longer wing nuts** ease installation for speedier connections
- **Nitrile rubber washers** provide a large pliable sealing surface and ensures a long lasting water tight connection
- **8-sided pneumatic crimp** provides greater dependability for reliable nut-to-hose connections
- **100% Compliant** to California and Vermont “low-lead” requirements




Operating Specifications:

Temperature: 40°- 140° F, intermittent to 180° F

Pressure: 125 psi maximum

Tubing Diameter: 0.300” I.D. (0.500” O.D.)

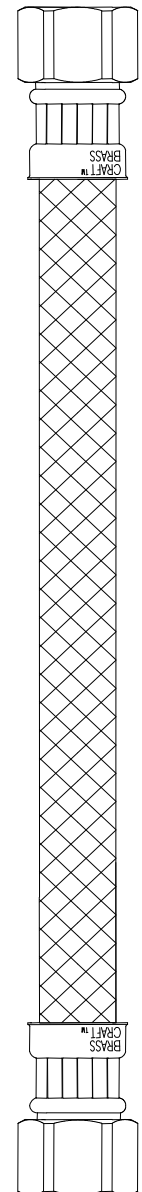

MATERIAL SPECIFICATIONS

Hose	PVC with polyester braid reinforcement
Barb	Compliant brass
Ferrule	Zinc plated 1008 steel
Nut	Chrome-plated C36000 brass
Washer	Nitrile rubber
Compression Ring & Nut	C36000 brass


Part Listing:

- V1-120DW F 3/8” Compression x 3/8” Compression x 9” Length

This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.



V1-**DW Speedi Plumb® Vinyl Dishwasher Connectors - Compression Inlet

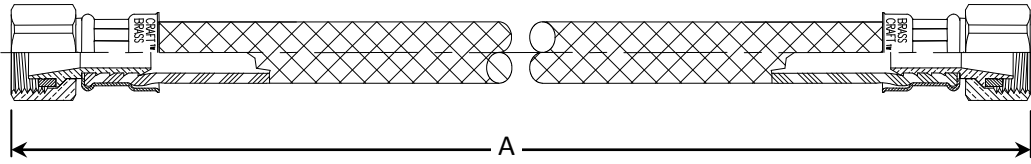

PART DIMENSIONS (Inches)	
Model	DIM. A
V1-120DW	120.0 / 121.0

Listings & Certifications:

- IAPMO listed to ASME A112.18.6-2003 (File # 0452)
- CSA listed to ASME A112.18.6-2003/ CSA B125 (File # 204593)
- CSA approved to California Health & Safety Code 116875 and Vermont Bill S.152 (Project # 2174785)



This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.

BrassCraft®