INSTALLATION MANUAL

CHANDELIER

Model No.: QLP011BB-11A

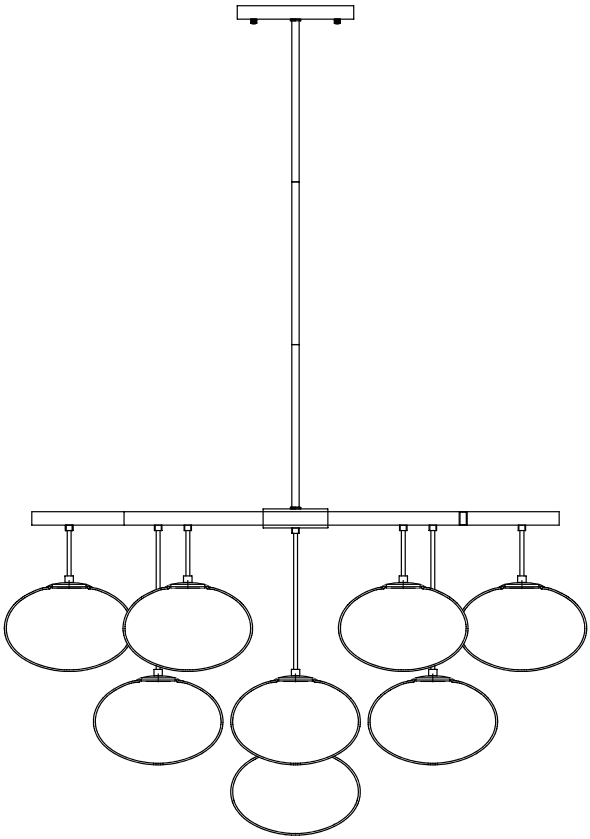

Scan for Installation Video

Safety Rules

WARNING: BE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF; EITHER THE FUSE IS REMOVED OR THE CIRCUIT BREAKER IS TURNED OFF. TURNING THE POWER OFF USING THE LIGHT SWITCH IS NOT SUFFICIENT TO PREVENT ELECTRICAL SHOCK.

NOTE: The important safeguards and instructions appearing in this manual are not meant to cover all possible conditions or situations that may occur. It must be understood that common sense, caution, and care, are factors which cannot be built into any product. These factors must be supplied by the person(s) installing this unit.

READ & SAVE THESE INSTRUCTIONS

CAUTION: Before assembling the lighting fixture, refer to the section titled Wiring Connections. If you feel you do not have enough electrical wiring experience, either refer to a do-it–yourself wiring handbook or have your lighting fixture installed by a qualified, licensed electrician.

INSTALLATION & OPERATION INSTRUCTIONS GENERAL

Before starting the installation, disconnect the power by turning off the circuit breaker or by removing the appropriate fuse at the fuse box.

Turning the power off using the light switch is not sufficient to prevent electrical shock.

All electrical connections must be in accordance with local and National Electrical Code (NEC) standards. If you are unfamiliar with proper electrical wiring connections, obtain the services of a qualified electrician.

Recommended Use:

For heavy fixtures like large fans and crystal chandeliers, use a Reinforced Fan Box with support. The box holds 70–150 lbs (31.7–68 kg) and must be firmly mounted to ceiling beams.

Installation Preparation

Tools You Need



☑ Ladder



☑ Pliers



☑ Wire Strippers



☑ Screwdrivers



☑ Wrench



☑ Power Drill (optional)



☑ Drill Bit (optional)

What to Expect with your Installation



☑ Check the box to see the weight of the light



☑ Angled ceiling applicable

Packing List



A Mounting Bracket x 1



B Canopy x 1



C 11.8″ Downrod x 3

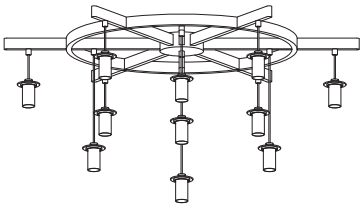

D Lamp Body x 1



E Glass Shade x 11

AA 2x



Outlet Box Screw

BB 3x



Wire Nut

CC 4x



Wood Screw

DD 4x



Washer

EE 2x



Anchor Bolt

FF 1x



Gloves

NOTE: The listed quantity is for installation, extra hardware may be included.

Installation Instructions

1. Remove the Mounting Bracket

Loosen the knurled nut from the canopy (B), and take out the mounting bracket (A).

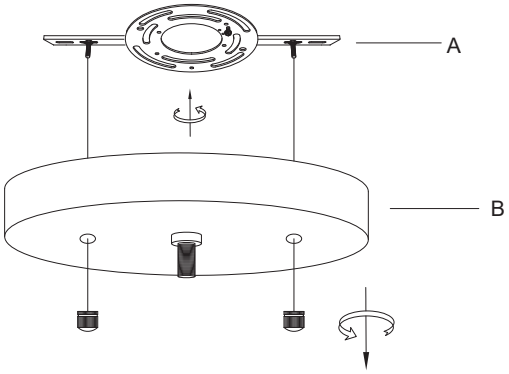

2. Mount the Bracket

Secure the mounting bracket (A) to the outlet box with screws taken off from outlet box or screws (AA) provided.

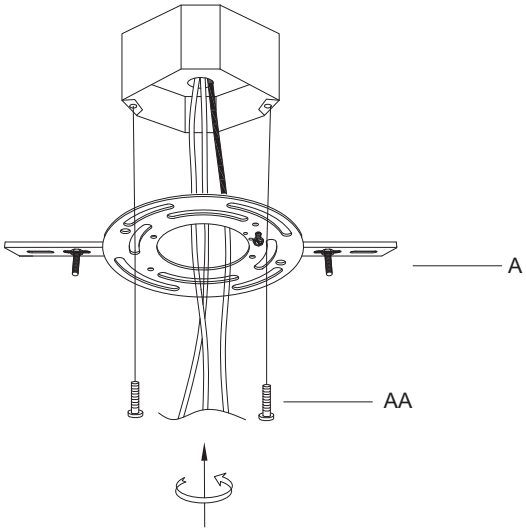

3. Assemble the Fixture Body

Step 1: Pass the power cord of the lamp body (D) through the downrod (C), and canopy (B).

Step 2: Connect the downrod (C) together, then screw the downrod (C) onto the lamp body (D).

Step 3: Twist the downrod (C) onto the canopy (B).

Note: Adjust the number of downrods used according to the desired installation length.

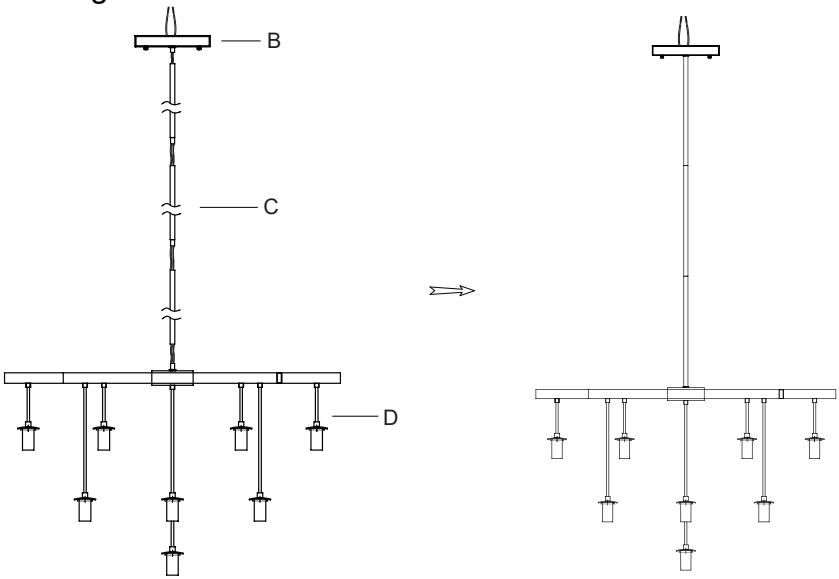

4. Connect the Wires

Connect the wires from the fixture to the house supply wires with wire nuts (BB), ground wire (green, green/ yellow, or bare copper) to ground wire, neutral wire (white) to neutral wire, and hot wire (black) to hot wire. Wrap the connection with electrical tape.

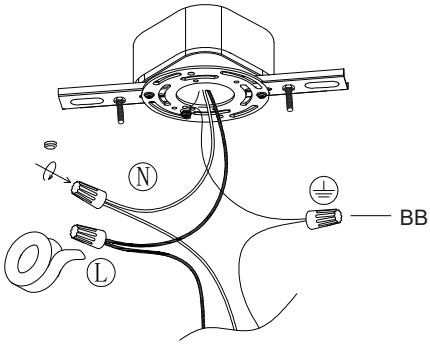



5. Fix the Canopy

Fix the canopy (B) onto the mounting bracket (A) with knurled nut.

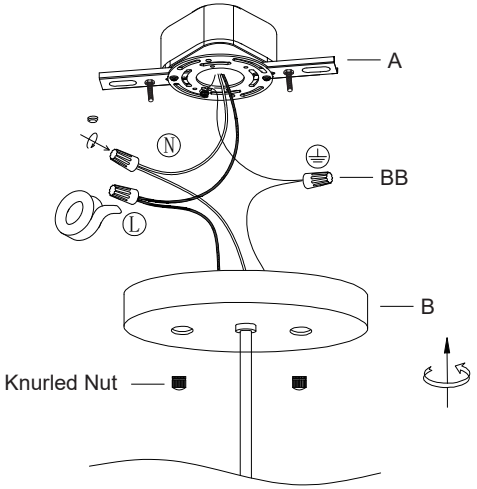

6. Install Bulb and Lamp Shade

Step 1: Install Bulbs (E12 x 11, Max 40W each, not included).
Step 2: Twist the glass shade (E) onto the lamp body (D).

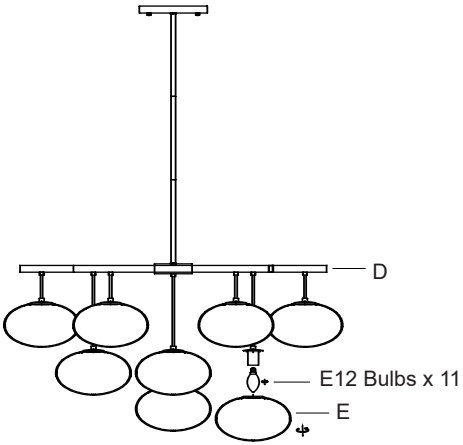

Bulbs Suggested



Note:

To achieve dimming functionality, you need to use dimmable bulbs and a dimmer switch.

For bulbs with color temperature control, repeatedly switch “on” and “off” using the wall switch to change settings.

Trouble Shooting

1. Missing / Broken Parts

· Make a list of the missing/broken parts according to the packing list, take photos for broken parts, then email us for free replacements.

2. Bulbs Do Not Light Up

· Check your power and switch to make sure it's power on.

· For regular bulbs, make sure it is connected to the ON/OFF wall switch, not the dimmer switch.

· Replace the bulb with a new one.

3. Bulbs Flicker

· If it is a dimmer switch, use a dimmable bulb.

· Replace the bulb with a new one.

4.Could Not Install / Assemble

· Take photos of the ceiling / fixture, contact seller for technical support.

Clean And Care

To clean, wipe fixture with soft cloth. Spray from chemical cleaners can discolor the finish of fixture. Do not use scouring pads, powders, steel wool or abrasive paper to clean this fixture.

Ordering Parts

Keep this manual for future reference, and in case replacement parts are needed. Available parts can be ordered from place of purchase. Use exact wording from diagrams when ordering parts.