


INSTALLATION AND CARE GUIDE

8 IN. WIDESPREAD BATHROOM FAUCET

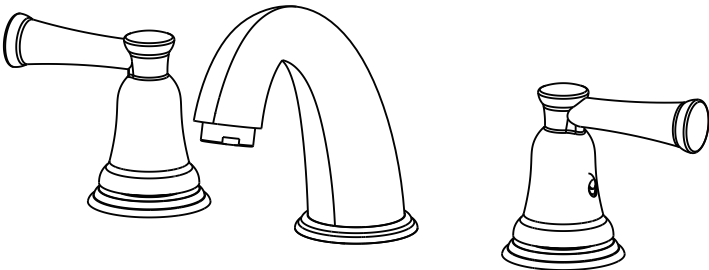

Pre-Installation


PLANNING INSTALLATION

Before you begin to install this product, ensure that all parts are present. Compare parts with the package contents list. If any part is missing or damaged, do not attempt to install the product. Contact customer service for replacement parts.


TOOLS REQUIRED




PACKAGE CONTENTS

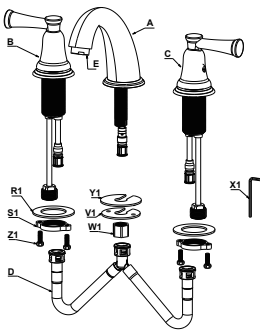

Optional Life Rod Pop-up (Q)

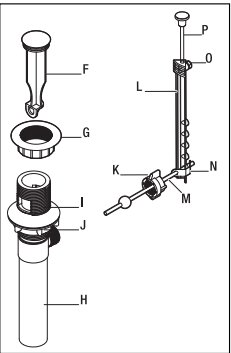


Optional Press Pop-up (Q)

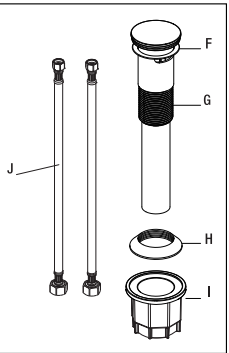

Part	Description	Quantity
A	Spout	1
B	Hot handle	1
C	Cold handle	1
D	Quick connect hose	1
E	Aerator	1
Q	Pop-up (Optional)	1
R1	Gasket	2
S1	Nut	2
V1	Gasket	1
W1	Lock nut	1
X1	Allen wrench	1
Y1	Washer	1
Z1	Screw	4


Installation-Faucet

1 Removing the old faucet




CAUTION: Always turn off the water supply before removing an existing faucet or replacing any part of the faucet. Open the faucet handle to relieve water pressure and ensure that the water is completely shut off.

- Shut off all water supply lines.
- Remove the old faucet and clean off the installation surface on the sink.

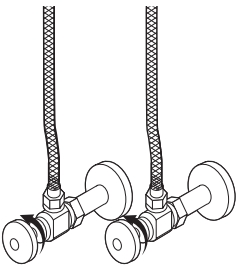


2 Installing the faucet

- Remove assembled parts (Y1 V1 W1) from the faucet body.
- Place the spout (A) in the center hole of the sink. Secure faucet as showed below.
- Loosen the screws (Z1) on the nuts (S1) until the ends of the screws (Z1) are flush with the face of the nuts (S1).
- Attach the faucet handles (B and C) underneath the sink using the gaskets (R1) and nuts (S1). Securely tighten the screws (Z1) on the nuts (S1).

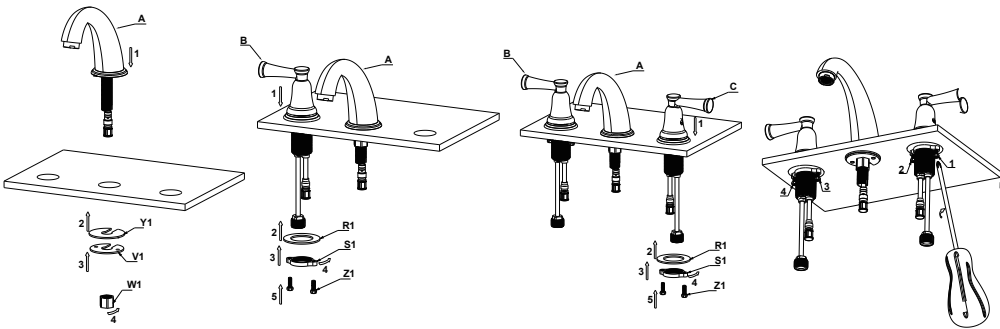


3 Connecting the water supply lines

- Remove the protect cap from the spout and handle assembly.
- Make connections to the water lines. Use 1/2 in. IPS faucet connections or use the supplied coupling nuts with 3/8 in. o.d. ball-nose risers.
- Use wrenches to tighten the connections. Do not overtighten.

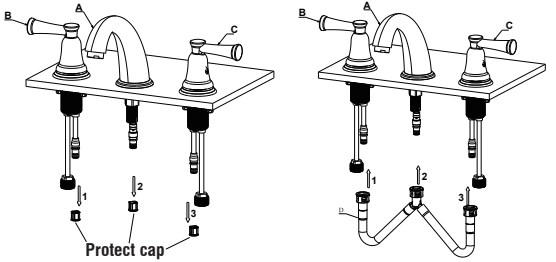

4 Checking for leaks

- Remove the aerator (E) from the spout.
- Turn on the water supply.
- Turn the handles (B & C) and allow both hot and cold water to run for at least one minute each.
- While water is running, check for leaks. Replace the aerator (E).

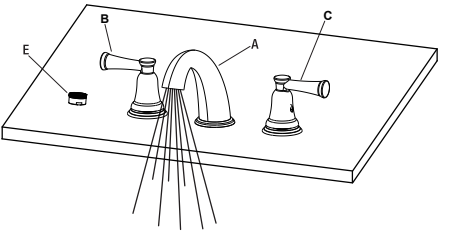


Installation Pop-up (Optional)

Lift Rod Pop-up (Optional A)

(1) Preparing the pop-up body


- Remove the preassembled stopper (F) and flange (G) from the pop-up body (H).
- Screw the nut (J) all the way down the pop-up body (H).
- Push the gasket (I) down on top of the pop-up body (H) to rest on top of the nut (J).

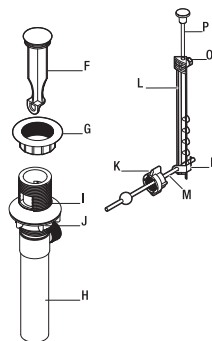

Part	Description	Quantity
F	Stopper	1
G	Flange	1
H	Pop-up body	1
I	Gasket	1
J	Nut	1
K	Pivot nut	1
L	Lift rod strap	1
M	Horizontal rod	1
N	Clip	1
O	Screw	1
P	Lift rod	1


(2) Installing the pop-up body

- Apply silicone sealant to the underside of the flange (G).
- Apply sealant tape to the threads at the top of the pop-up body (H).
- Insert the pop-up body (H) into the sink.
- Screw the flange (G) onto the pop-up body (H). Ensure the pivot hole faces the back of the sink.
- Tighten the nut (J) and gasket (I). Do not overtighten. Clean off any excess sealant.
- Remove the pivot nut (K).

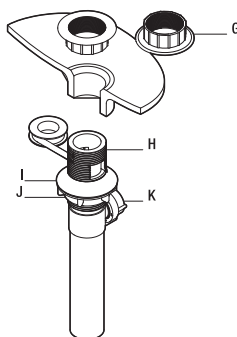


(3) Installing the stopper

- Insert the stopper (F) into the sink. Remove the preassembled horizontal rod (M) and clip (N) from the lift rod strap (L).
- Install the horizontal rod (M) into the pop-up body (H) and through the hole of the stopper (F).
- Install the pivot nut (K) onto the horizontal rod (M) and hand tighten back onto the pop-up body (H).
- Re-attach the lift rod strap (L) to the horizontal rod (M) using the clip (N).

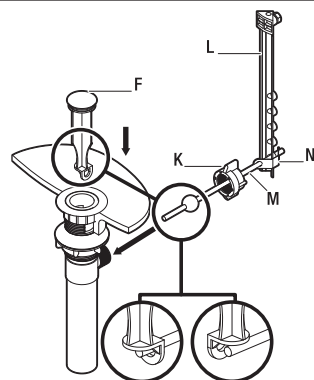

(4) Installing the lift rod


- Insert the lift rod (P) through faucet (A) and into the strap (L). Tighten the screw (O).

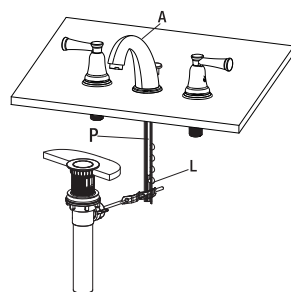

Press Pop-up (Optional B)

(1) Preparing the pop-up body


- Remove the bottom gasket (T) and nut (U) from the top gasket (R) and pop-up body (S).
- Attach these pieces together by pushing the bottom gasket (T) down into the top of the nut (U) and twisting together.

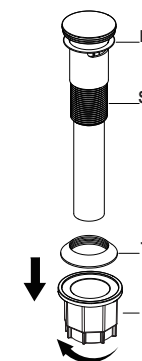

Part	Description	Quantity
R	Top gasket	1
S	Pop-up body	1
T	Bottom gasket	1
U	Nut	1

(2) Installing the pop-up body

- Insert the pop-up body (S) into the sink. Ensure that the top gasket (R) rests securely between the top of the sink and the top of the pop-up body (S).

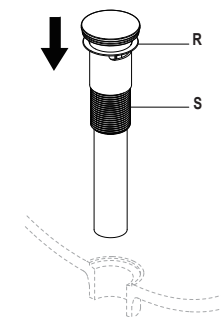

(3) Securing

- From underneath the sink, screw the bottom gasket (T) and nut (U) assembly onto the pop-up body (S) by twisting clockwise until secure.

