



Items Included

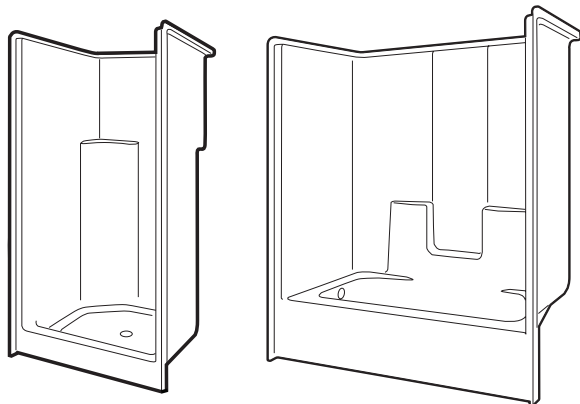

Shower or Tub-Shower
Product illustration may not be representative of your unit.

Tools Needed

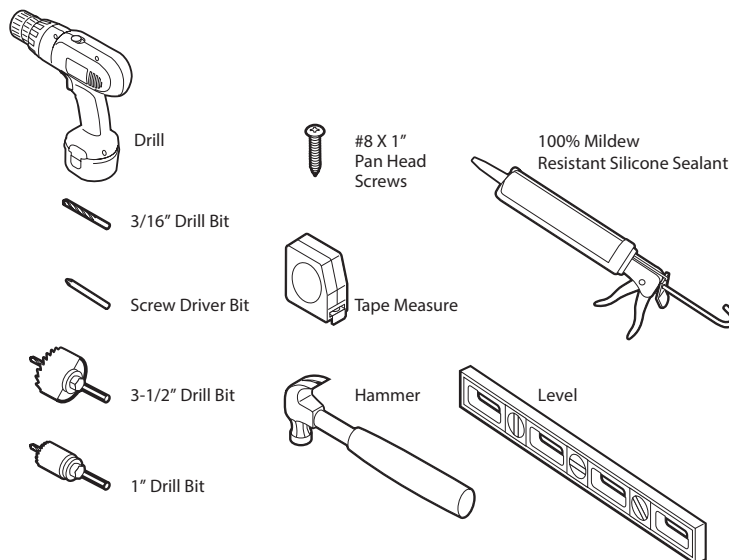

NOTICE: Please inspect the unit thoroughly before installation to make sure it has not been damaged during transportation. Under no circumstances should a damaged unit be installed. Neither Ella nor the distributor will be responsible for removal or reinstallation costs should a replacement be necessary due to installation of a damaged unit.

PRE-INSTALLATION PLANNING

1. Unit must be placed within the bathroom area before completion of door framing or, if preferred, studs may be omitted or knocked-out to permit unit placement.
2. Review job print and Ella rough-in dimensions; verify all key dimensions against actual job conditions. Make sure framed-in alcove is of proper size, square and plumb; check floor for levelness.
3. The blocks and/or legs attached underneath the bottom of the bath fixture are an integral part of the support system and should not be removed. Although these blocks and/or legs need not touch for an acceptable install, this may be an indication that the unit and/or subfloor are out of level.

NOTE: No foundation materials are required on Ella Shower and Tub/Shower units.


4. If fire-rated alcove is required, approved finish material must be in place prior to unit installation to meet fire safety requirements of local building code and/or FHA/HUD Minimum Property Standards. **NOTE: Finished alcove must have interior dimensions shown on rough-in diagram to permit installation of unit.**
5. **Showers:** Provide 6" (150mm) floor opening for 2" (150mm) IPS and drain connection.
Tub-Showers: Provide 6 x 12 (130mm x 300mm) floor opening for 1 1/2" (140mm) drain, waste and overflow (DWO) kit.
NOTE: Be sure floor opening location matches bath fixture drain location.
6. To avoid obstruction, make sure that supply lines and valve plumbing are not strapped to studs and do not project into alcove. Also, drain pipe must not project above floor level prior to installation.
7. Make sure all plumbing is complete and to code.
8. To prevent scuffing while installing unit, cover the entire bottom of the unit with a piece of cardboard or other protective material.
9. **Fasten drain fitting to unit before installing** (see manufacturers instructions).

NOTE: Fasteners for wood framing-1 1/2" galvanized roofing nails or #10 x 1 1/2" self-tapping washer head screws, for concrete or block walls-1" concrete nails and nailing tool, for steel studs (18 ga)-drill flanges and studs with 5/32" carbide bit and use #12 x 1" sheet metal screws.


For technical/installation literature call 800.480.6850 or visit the Ella Bubbles web site at www.info@ellabubbles.com

INSTALLATION PROCEDURE

1A

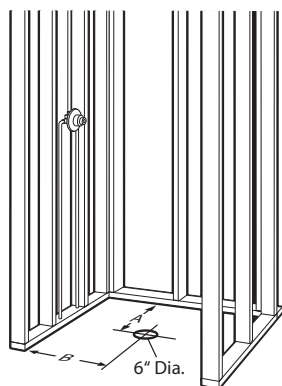

1B

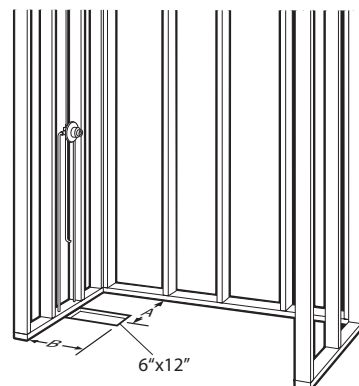


Note: If fire-rated alcove is required, approved finish material must be in place prior to unit installation to meet fire and safety requirements and local building codes and/or FHA/HUD Minimum Property Standards.


Check dimensions. Make sure framed-in alcove is of proper size, square and plumb.

For shower, refer to Diagram 1A; for tub-showers; refer to Diagram 1B.

2A

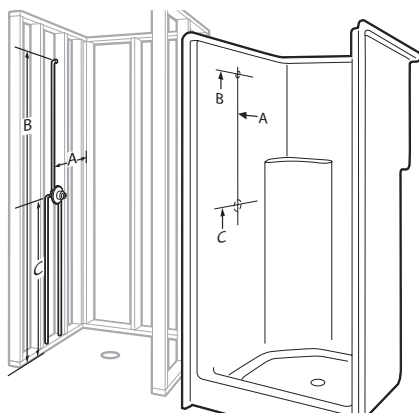

2B

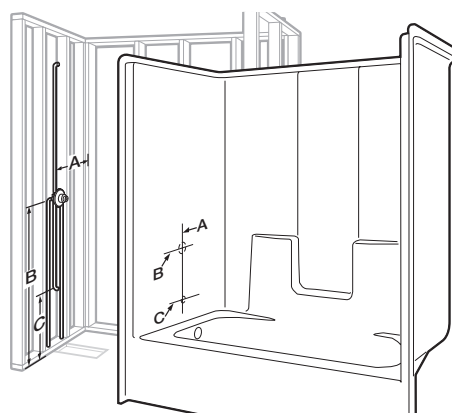

If mounting fittings, - from stable reference points (back wall studs, floor) measure the locations of spout and valves.

Note measurements below.

For showers, refer to Diagram 2A, for tub showers, refer to Diagram 2B.

Note measurements here:

Tub Filler: _____


Valve: _____

Shower Arm: _____

Valve: _____

(Mark dimensions only if shower arm is plumbed within bath fixture wall area.)


3

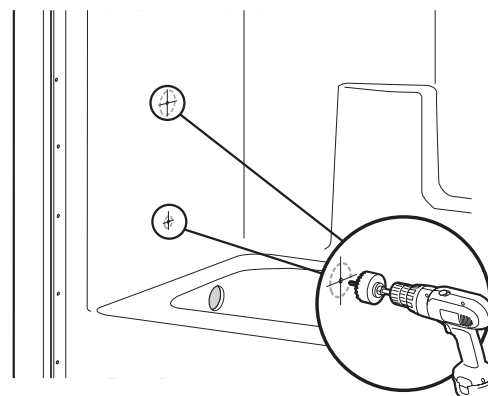

Mark fitting locations. (Refer to measurements from step 2). Using a hole saw (fine tooth or abrasive grit cutting edge) make necessary openings for filler and valves, drilling from inside (smooth side) out.


INSTALLATION PROCEDURE CON'T.

4

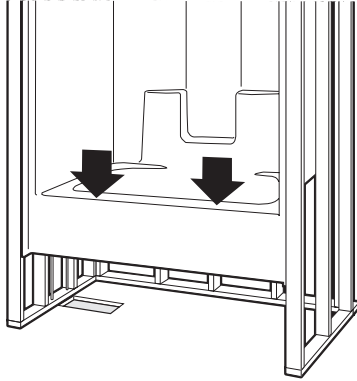


Place the unit into framing with drain fitting over and onto waste pipe with skirt firmly on the floor.

5

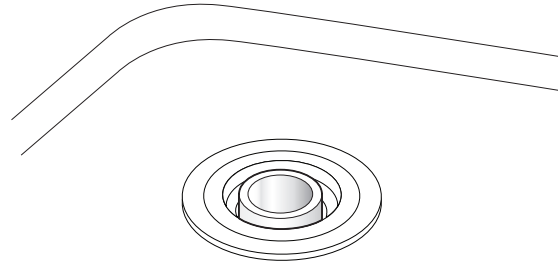


Assure waste pipe protrudes well into drain fitting. Maintain proper floor slope towards drain.

6

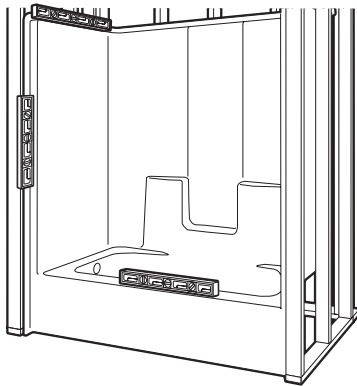

Check for level.

7

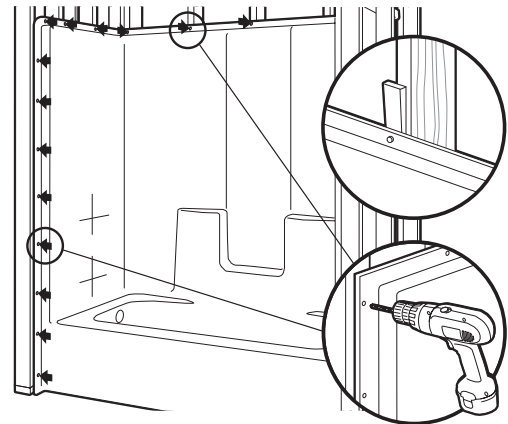

Pre-drill pilot holes. Fasten panel to framing at every stud and eight inches vertically through nailing flange.

When other than cementitious backer board plaster is used, furring strips as thick as nailing flanges are recommended for installation on studs above the installed Ella unit to assure walls will be flush. 100% silicone with mildew resistant properties should be applied between the backer board and horizontal surface of unit.

Then finished wall materials can be applied.

CLEAN-UP

1. **Do not remove warranty/maintenance adhered label.**
2. **Prevent staining.** Remove **all** debris before plumbing leak test. Use sponge with warm water and liquid detergent. Rinse drain and wipe clean. Do not use abrasive cleansers such as scouring powders, steel wool, metal scrapers, sandpaper or anything else that might mar, dull or scratch the finish.
3. Plaster and latex paint may be removed with warm water, liquid detergent and brittle brush or plastic scraper. Glues, tars and enamels may be removed with acetone or paint thinner. **Do not use** turpentine or laquer thinner. **Do not use** excessive heat or any caustic solvents or chemicals.
4. Dull areas and light scratches may be removed by buffing with a light colored automotive rubbing compound and buffing pad. Entire unit can be waxed with light colored automotive wax, **Do not wax the bottom of unit.**
5. See user maintenance label for more details.

USER MAINTENANCE INSTRUCTIONS

IMPORTANT! Use only recommended cleaners and procedures described herein. Use of other materials may damage your bath fixture and void the warranty.

1. For normal cleaning: Never use abrasive cleaners such as scouring powders or pads, steel wool, scrapers, sandpapers or anything else that could scratch or dull the surface of your Ella unit. Instead, use warm water and liquid detergents or non-abrasive cleaners, especially those bathroom cleaners recommended for cleaning fiberglass.
2. To keep your Ella bath fixture sparkling clean: Apply a coat of good quality automotive paste wax or polish and buff to a high shine with a soft cloth or towel. Repeat every six months for easier cleaning and long lasting protection.

NOTE: DO NOT WAX textured, slip-resistant standing surface of the unit bottom. This could result in greater risk of slipping or personal injury.

3. To restore a scratched or dull unit: Use a automotive polishing compound applied with a clean cotton rag. Rub scratches and dull areas vigorously. Wipe off all residues. Follow with automotive wax treatment described above.
4. To remove adhesive: Try 3M Natural Cleaner, Ce-Solvent or similar materials. If residues remain, saturate a small, white, cotton rag with nail polish remover (naptha or acetone) and rub vigorously until the adhesive dissolves and disappears. These solvents are highly flammable and must be used sparingly and with caution. Do not smoke or permit others to do so. Make sure not to contact plastic drain grates or other synthetic materials.
5. Rubber Mats: If you use a rubber "anti-skid" mat, make sure to remove it from the unit after each use to avoid harm to the surface finish.
6. Hard Water: Water in certain regions, if not wiped up after bathing/showering may cause fading of some bath fixture colors. This is a natural occurrence beyond Ellas control. (See Warranty).

CAUTION: When using any cleaning or polishing materials, make sure to read and follow all package instructions carefully. Wear rubber gloves at all times and avoid contact with eyes, skin, clothing, rugs and furnishing. Make sure all residues are rinsed off thoroughly.

Customer Service | Technical Services | Warranty Services

2101 S. Carpenter St.
Chicago IL. 60608.
Ph: 800.480.6850

Visit the Ellas Bubbles web site at www.info@ellabubbles.com

LITID 1900-Ella

Rev. 08-12-21.



SHOWER STALL WARRANTY

GENERAL

Ella warrants to the original purchaser only that its product is free from defects in material or workmanship. Ella offers a Lifetime limited warranty* on all AcrylX™ fiberglass models from the date of purchase.

*Commercial applications carry a (30) year warranty.

If the product shall prove to have material defects, manufacturing defects or other labor defects, during the warranty period, it shall be repaired or replaced at the discretion of the warranty department of Renovative Bath.

LIMIT OF LIABILITY

Ella sole and exclusive liability hereunder shall be to repair or replace goods or parts there of found to be defective within the warranty period. In no event shall Ella be liable to the purchaser for incidental or consequential damages whether in contract, tort, or otherwise, including but not limited to damage related to loss of profits or revenue, loss of use of goods or any associated equipment, cost of substitute goods, downtime costs, or other damages to the purchaser or its customers.

WARRANTY CLAIM

To file a warranty claim you must fill out a Ella Product warranty claim request and submit it to Ella's Bubbles for approval. Upon approval a work order will be issued for that warranty claim and the unit will be repaired or replaced with a product of equal value at the manufacturers' option. Should the claim be deemed non-warranty, an applicable service fee will be applied by the service technician.

WARRANTY EXCEPTIONS

1. This warranty shall not apply to incorrect operating procedures, breakage or damage caused by neglect, improper maintenance, abuse, misuse, alteration or modification to the unit by the buyer or anyone representing the buyer. It will not cover chemical corrosion, natural corrosion, fire, or any act by the force of nature.
2. The buyer of this product is fully responsible for the proper installation of this unit. Ella will not be held responsible for any damage resulting from improper installation.
3. This warranty does not apply to products or equipment not installed or operated in accordance with the instructions supplied by Ella and in accordance with all applicable rules, regulations, and legislation pertaining to such installation.
4. Ella is not liable for personal injuries to or the death of any person or for any direct, special, incidental or consequential damages, loss of time, loss of profits, inconvenience, incidental expenses, labor or material charges, or any other costs resulting from the use of the product or equipment or pertaining to the application of the present warranty, or resulting from the removal or replacement of any product or element or parts covered by this warranty.
5. All warranty work will be implemented at the discretion of the Ella Warranty Department upon the summation and evaluation of the circumstance involving the product in question.
6. There are no other expressed warranties. Implied warranties, including those of merchantability and fitness for purpose are limited to the warranty period. Any and all implied warranties are excluded and/or limited to the extent permitted under the laws of the state where the product is installed.
7. Ella is not liable for any costs, damages, or claims incurred for products purchased that will not fit through openings, or existing structures. Ella is not liable for any costs, damages, or claims resulting from defects that could have been discovered, repaired, or avoided by inspection and testing prior to installation.

For any questions or requests contact our warranty department at: 1-800-480-6850

All mailing notification must be sent via certified mail to:

Ella's Bubbles, LLC.

2101 S. Carpenter Street

Chicago, IL 60608

Email: info@ellasbubbles.com

JANUARY 2024

INSTALLER'S INFORMATION

Name _____			
Address _____	City _____	State _____	Zip _____
Telephone _____		Email _____	
Date _____	Signature _____		

Upon completing the installation of an Ella Walk In Bath, the following Warranty Activation Form must be completed, signed by both the customer and installer, and returned to Ella's Bubbles, LLC. In order for the Warranty to be activated (faxed, scanned, or emailed, or hard copy mailed).

TO BE INITIALED BY THE INSTALLER(S)

- _____ Tub is level in all directions and all support legs are touching the ground.
- _____ Tub is installed on a dedicated 30 Amp GFCI protected circuit using 10 gauge wire
- _____ Frame of the tub has been properly grounded.
- _____ Door Seal has been cleaned with rubbing alcohol to remove any dust or debris left over from construction.
- _____ Temperature Control Valve operated on both hot and cold settings.
- _____ Both diverters function properly.
- _____ Hand Shower functions on all settings without leaking.
- _____ All supply lines have been checked for leaks while both diverters are on.
- _____ Drains open and close properly, and the locking nut has been tightened on both stoppers.
- _____ Door seal is water tight after tub has been filled for a minimum of 20 minutes.
- _____ After running for a minimum of 20 minutes both the Hydro and Air Pumps are functioning properly and all connections to the pumps and jets are water tight.
- _____ Chromatherapy Light and the Ozone Sterilization are working properly. (When the Ozone is on by itself it will make a light humming noise).
- _____ All drain fittings have been checked for leaks while the tub is draining.
- _____ Unit is installed with access to both plumbing and electrical connections.

OWNER'S INFORMATION

Name _____

Address _____ City _____ State _____ Zip _____

Telephone _____ Email _____

Date _____ Signature _____

Model _____ Serial Number _____

Purchase Date _____ Purchase Price _____

Place of Purchase _____

Contact Name _____ Telephone _____

**** Copy of sales receipt must be included with warranty activation forms.**

To activate manufacturer's warranty, please complete both pages and use one of the following options below to submit.

Mail: Ella's Bubbles, LLC.
Warranty Department
2101 S. Carpenter Street Chicago, IL 60608

Fax: 1-312-666-3551

Email: warranty@ellasbubbles.com