

**SPEC SHEET**



Commercial Electric's Outdoor High-Output LED Wall Pack and Area Security Light with integral Dusk to Dawn photocell features high-performance LEDs saving 85% on energy bills. Its dimensions match most 150-Watt traditional metal halide commercial wall packs allowing for easy upgrades and replacements. Dimming feature enables the user to control the amount of light output, from ambient to high-output brightness of 6,800-Lumen. The Dual-Control Enabled feature allows for both Dusk to Dawn operation for automatic nighttime on/daytime off ensuring efficient energy usage or normal Switch-Controlled operation for more hands on control.

LED TECHNOLOGY LIGHTING PERFORMANCE

<b>LUMENS</b>	3300
<b>SYSTEM WATTAGE</b>	28W
<b>MOUNTING</b>	Wall Mount
<b>FREQUENCY</b>	50-60 HZ
<b>THD</b>	<20%
<b>PF</b>	>0.9
<b>AMBIENT OPERATING RANGE</b>	-20-40°C
<b>INPUT VOLTAGE</b>	120-277V
<b>EFFICACY</b>	>118 LM/W
<b>LED CHIP</b>	Lumileds® LED
<b>DRIVER</b>	YG® driver technology
<b>PHOTOCELL</b>	Yes
<b>DIMMABLE</b>	Yes (0-10V)
<b>DRIVER EFFICIENCY</b>	>85%
<b>STANDARD LIFETIME</b>	>50,000 hours
<b>STANDARD WARRANTY</b>	5 Years
<b>WATER PROOFING GRADE</b>	IP65
<b>WEIGHT</b>	12.12 lbs
<b>CCT</b>	4000 Kelvin (Bright White)
<b>DIMENSIONS</b>	9.9" x 5.7" x 6"

**LIGHT APPEARANCE (CCT)**

**PRODUCT PERFORMANCE AT A GLANCE**

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
28W	26W	3300 lm	118 lm/w	≥70	100W

**HOUSING**

High-grade commercial quality die-cast aluminum housing with UV-stabilized boroscillate prismatic glass lens, mounted with stainless steel hardware.

**IP RATING & LISTINGS**

LED light engine is weather proof rated IP65.  
DLC 4.2, cULus, FCC Certified

**OPTICS**

Direct LED distribution with white reflective light distribution refractor. Prismatic glass lens reduces glare while providing even and wide light distribution.

**MOUNTING**

Easy knock-outs on back box allows mounting to any standard 3 1/2" to 4" square and octagonal or 4 inch round electrical junction boxes. Can also be flush mounted to any surface and wired via conduit entries.

**FINISH**


Fade, weather, and abrasion resistant, electrostatically applied, thermally cured, triglycidyl isocyanurate (TGIC) textured polyester powdercoat finish. Paint is dark bronze.

**APPLICATION**

Ideal for both residential and commercial applications requiring high brightness and a large coverage area. Perfect for wall perimeter lighting, garages, large backyards, commercial loading bays, warehouses, apartment complexes, hotels, office and retail complexes.



\*All results according to IESNA - LM79-2008  
\*Light Output reported as total integrated lumens (light source & fixture)

**PRODUCT LINE DRAWING**

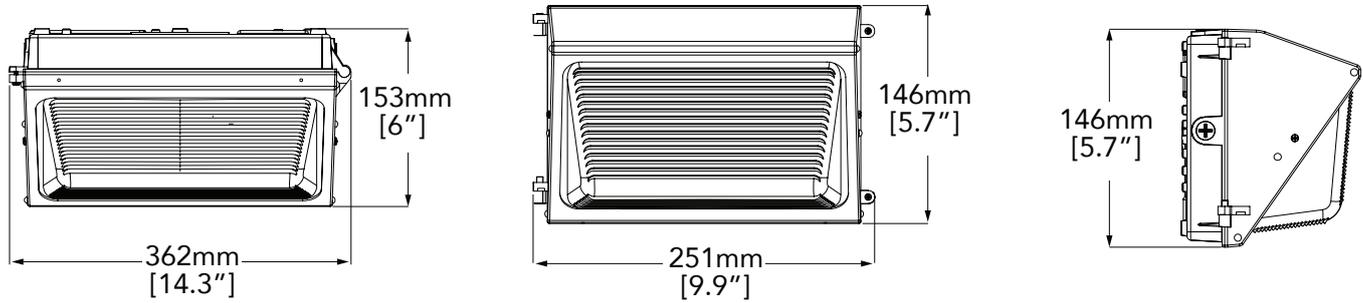

**SUGGESTED MOUNTING HEIGHT:**  
8-12FT. (2.4-3.7M)

**3D PHOTOMETRIC VIEW**

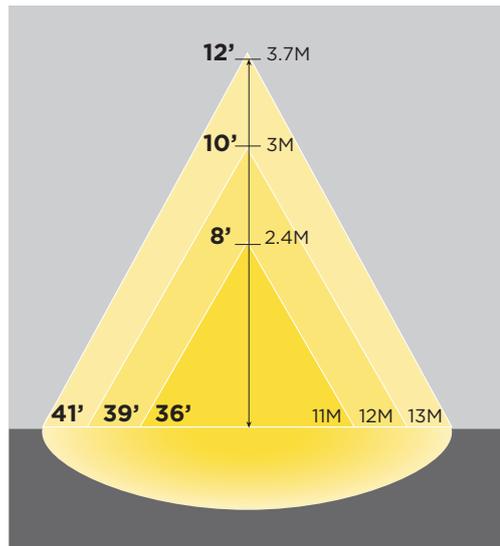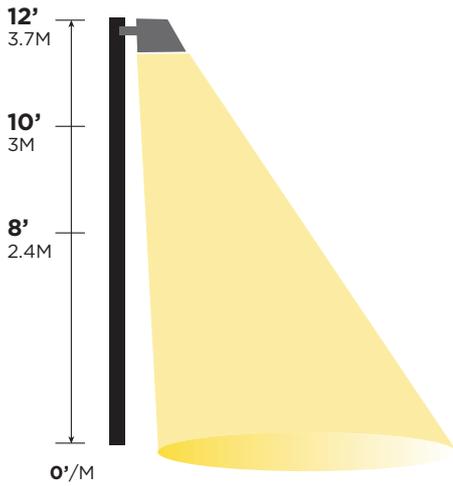

**APPLICATIONS**

