


PRODUCT SPECIFICATIONS

EXIT EMERGENCY COMBO W BATTERY



EECLEDRG120277 SKU# 1003866837 (White)
EECBLEDRG120277 SKU# 1005190230 (Black)

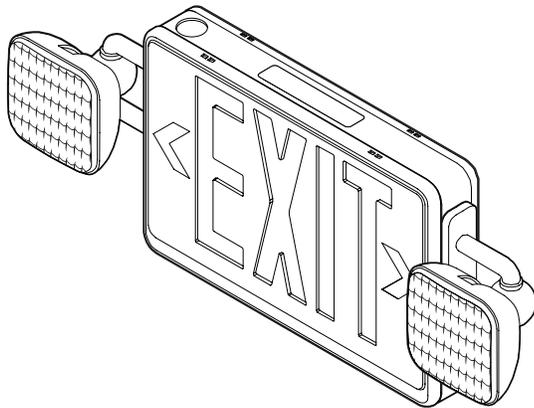

SPECIFICATIONS

Model Number	EECLEDRG120277/ EECBLEDRG120277
SKU	1003866837/ 1005190230
OSMID	306606870/ 312379021
Power	4.6 W
AC Voltage, Frequency	120-277V, 60 Hz
Color Temp (nom.)	4000K Emergency Heads
Operation Temp	32°F ~ 104°F
CRI	80
Lumen Output (min.)	247 lm
Max Mounting Height	35.31 FT
Emergency Run Time	Min 90 min with included 9.6V Ni-Cad Batt
Efficacy	53 lm/watt

KEY FEATURES

- Red/Green switchable exit sign via on Board Switch. All components included to operate as red or green exit sign
- Single or Double faced
- Fully Adjustable Emergency Heads
- Dual Voltage 120/277 VAC, 60 Hz
- Test switch/power indicator light
- Top or Rear Mount
- 9.6V Ni-Cad Battery with Min 90 Min Run Time
- 5 Year Warranty

HOUSING CONSTRUCTION

- Injection molded, color stable, high impact UL 94-5VA rated polycarbonate
- Available in White or Black textured finish
- Snap-fit construction to enable fast installation
- Molded-in wireways facilitate internal wire routing and connections
- Field adjustable snap-out/snap-in chevron directional indicators

RATINGS

- UL 924 Listed
- UL Damp Location Rated
- Life Safety NFPA 101
- CEC, T20, DOE Listed
- NEC/OSHA

PACKAGING

Weight (±0.5 lb)	3.77 lbs
Size (L x W x H) (±0.1 in)*	20.5 in x 3.5 in x 8.0 in
Box Dimensions LxWxH	8.3 in x 19.5in x 3.9in
Gross Weight	4.56 lbs
UPC	853711008113 / 853711008267

* Dimensions include Emergency Heads

INCLUDED IN BOX

- Exit Sign Face Plates (2)
- Solid Face Plate (1)
- Red Placard (2)
- Green Placard (2)
- Top Mount Canopy (1)
- 9.6V Ni-Cad Back Up Battery (1)
- All necessary Mounting Hardware