EVERBILT™

SHOWER STEM INSTALLATION INSTRUCTIONS

1006965167

Tools Required:

Screwdriver
Adjustable Wrench
Seat Wrench
Socket Wrench


Optional:

Handle Puller

Installation Instructions:

1. Turn off water supply. Release pressure.
2. Remove handle button and handle screw. (Use handle puller if you have trouble removing your handle.)
3. Remove the flange. (Use masking tape to protect the finish.)
4. Remove the old stem using the socket wrench. (NOTE: If replacing the stem only, skip to step 6.)
5. Using a seat wrench, remove the old faucet seat and replace with the seat included.
6. Make sure cap stem gasket is in place, and thread new stem into faucet. Tighten with socket wrench. (Do not over tighten.)
7. Reinstall the flange.
8. Replace handle and button.
9. Turn on water and check for leaks.

Shower with Flange:

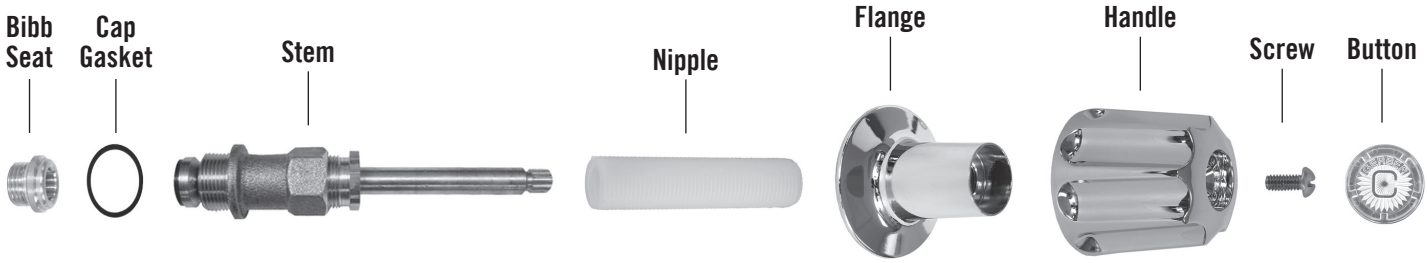

Shower with Sleeve and Flange:

