

EML5-10-UNV-WH

LED Micro Emergency Light

Product Description

This LED thermoplastic emergency lighting unit offers a you a mini sized unit for those tight spaces or a more discreet application. The EML5 Series is available in white and offers universal mounting with testing button and a damp location listing. With fully adjustable heads, the EML5 Series complements any design application.

Construction

Injection molded thermoplastic ABS housing
UL-94V-0 flame rating - Flame Retardant

Electrical

1.2 Watts per head
120-277V Dual Voltage Operation
LED Indicator Light & Push Button Test Switch
90 Min capacity on emergency mode
Damp Location Rated (0°C - 40°C)

Installation

Universal mounting plate with EZ quick connect

PRODUCT INFORMATION



Input Voltage (V):	120-277
Power Draw (W):	2.4
Emergency Battery:	90 minutes
Lumen Output:	162 Lumens (avg)

Project

Catalog

Type

Date

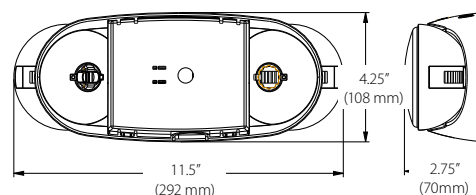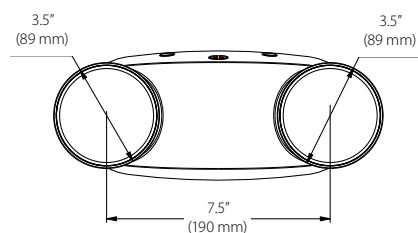

Ordering Information

Example: EML5-10-UNV-WH

Series	Version	Voltage	Housing Color
EML5	10 (1.0)	UNV (120-277V)	WH (white)