

**Description**

The Halo RL560 is a complete LED Baffle-Trim Module for 5" and 6" aperture recessed downlights; suitable for new construction, remodel and retrofit installation. The RL560 is cULus Listed for use with Halo and All-Pro, and is UL Classified for use with other compatible 5" and 6" housings. The RL560 with integral LED driver offers 120 volt dimming capability. The RL560 lens provides uniform illumination and wet location listing. Precision construction makes any housing AIR-TITE for added HVAC savings and code compliance.

Catalog #		Type
Project		
Comments		Date
Prepared by		

**Specification Features**

**MECHANICAL**

**Module - Trim**

- Module construction includes LED, heat sink, reflector, lens, baffle and trim ring
- Regressed baffle
- Heat sink designed to conduct heat away from the LED keeping the junction temperatures below specified maximums, even when installed in insulated ceiling environments
- Designer trim finish options (sold separately)
  - White (Paintable) Trim Ring
  - Satin Nickel Trim Ring
  - Tuscan Bronze Trim Ring

**Lens**

- Regressed lens
- Impact-resistant polycarbonate
- Convex form for lamp-like appearance
- High lumen transmission
- Diffusing for even illumination

**Mounting**

- Push-N-Twist universal installation clips
- Pre-installed clips designed to fit industry standard 5" and 6" recessed housings

**Housing Compatibility**

See Housing Compatibility

**LED**

- Color Temperature (CCT)<sup>†</sup>  
Options: 2700K, 3000K, 3500K, and 4000K
- CRI options: 80 and 90<sup>†</sup>
  - 90 CRI can be used for California Title 24 compliance/certified to Title 20
  - 80 CRI can be used to comply with California Title 24 Non-Residential Lighting Controls requirements as an LED luminaire

**LED Chromaticity**

- A tight chromaticity specification ensures LED color uniformity,

sustainable Color Rendering Index (CRI) and Correlated Color Temperature (CCT) over the useful life of the LED

- LED chromaticity of 3 SDCM exceeds ENERGY STAR® color standards per ANSI C78.377- 2008
- 90 CRI model features high color performance with R9 greater than 50
- Every Halo LED is quality tested, measured, and serialized in a permanent record to register lumens, wattage, CRI and CCT
- Halo LED serialized testing and measurement ensures color and lumen consistency on a per-unit basis, and validates long-term product consistency over time

**ELECTRICAL**

**Power Connections**

- LED connector is a non-screw base luminaire disconnect offering easy installation with the matching Halo 5" and 6" LED housings
- LED Connector meets California Title-24 high efficacy luminaire requirement for a non-screw base socket, and where required to qualify as a high efficacy luminaire
- The included E26 medium screw-base Edison adapter provides easy retrofit of incandescent housings (see Housing Compatibility)

**Ground Connection**

Separate grounding cable included on the module for attachment to the housing during installation.

**LED Driver**

- Integral to the housing, 120V 50/60 Hz constant current dimmable driver provides high-efficiency operation
- Driver meets FCC 47CFR Part 15 EMI/RFI consumer limits for use in residential and commercial installations
- Driver features high power factor and low THD and has integral thermal protection in the event of over

temperature or internal failure

- If dimming is not required the fixture can be operated from a standard wall switch

**Dimming**

- Designed for continuous dimming capability to nominally 5% with many 120V Leading Edge (LE) and Trailing Edge (TE) Phase Control dimmers. (Dimmers with low end trim adjustment offer greater assurance of achieving 5% level.)
  - Consult dimmer manufacturer for compatibility and conditions of use
- Note:** some dimmers require a neutral in the wallbox.

**Warranty**

Cooper Lighting provides a five year limited warranty on RL56 LED.

**Compliance Labels**

- UL/cUL Listed 1598 Luminaire (with listed housings)
- UL Classified (with other housings - see Housing Compatibility)
- UL/cUL Listed for Damp Location
- UL/cUL Listed for Wet Location – Shower Applications
- IP56 Ingress Protection rated
- May be installed in housings in direct contact with insulation\*\* and combustible material

**Compliance**

- Airtight certified per ASTM E283 (not exceeding 2.0 CFM under 57 Pascals pressure difference)
- 90 CRI: Can be used to comply with California Title 24 High Efficacy requirements. Certified to California Title 20 Appliance Efficiency Database.\*
- 80 CRI: Can be used to comply with California Title 24 Non-Residential Lighting Controls requirements as an LED luminaire
- Can be used for International Energy Conservation Code (IECC) high efficiency luminaire compliance.



**RL560WH6<sup>†</sup>**

White


**600 Series  
5/6-Inch LED  
Recessed Retrofit  
Module-Trim**

**80CRI  
2700K, 3000K,  
3500K, 4000K**


**90CRI  
2700K, 3000K,  
3500K, 4000K**

**FOR USE IN  
INSULATED CEILING  
AND NON- INSULATED  
CEILING RATED  
HOUSINGS**

**HIGH-EFFICACY LED  
WITH INTEGRAL  
DRIVER - DIMMABLE**



Refer to ENERGY STAR® Certified Products List. Can be used to comply with California Title 24 Non-Residential Lighting Controls requirements as a LED Luminaire.



Refer to ENERGY STAR® Certified Products List. Can be used to comply with California Title 24 High Efficacy requirements. Certified to California Title 20 Appliance Efficiency Database.

\* Refer to ENERGY STAR® Certified Products List and CEC (T20) Appliance Database for listings.


\*\* Not for use with housings in direct contact with spray foam insulation.

† See ordering information table for available models.


## Specification Features Continued

- Can be used for Washington State Energy Code compliance
- ENERGY STAR® Certified luminaire - consult ENERGY STAR® Certified Product List\*
- EMI/RFI per FCC 47CFR Part 15 Class B Consumer limits, suitable for use in residential and commercial installations
- Contains no mercury or lead and RoHS compliant.
- Photometric testing in accordance with IES LM-79
- Lumen maintenance projections in accordance with IES LM-80 and TM-21

## RL56 Dimensions

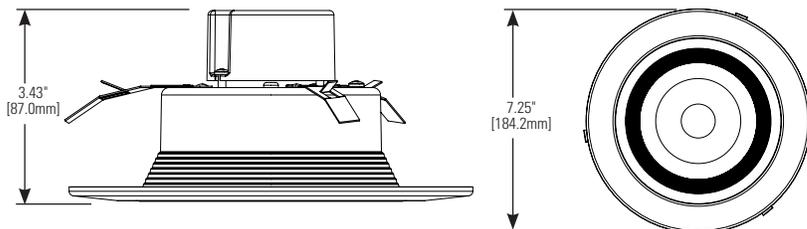

## Designer Trim Dimensions

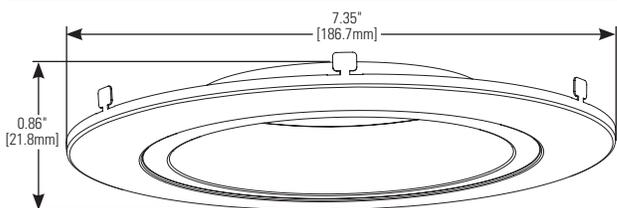

**RL56TRMWH**  
White (Paintable)



**RL56TRMTBZ**  
Tuscan Bronze



**RL56TRMSN**  
Satin Nickel

## Energy Data

**RL56 Series** (Values at non-dimming line voltage)

Minimum Starting Temp: -30°C (-22°F)

EMI/RFI: FCC Title 47 CFR, Part 15, Class B (Consumer)

Sound Rating: Class A

Input Voltage: 120V

Power Factor: >0.90

Input Frequency: 60Hz

THD: <20%

Input Power: 10.5W - RL560WH6827, RL560WH6927, RL560WH6930, RL560WH6935

10W - RL560WH6940, RL560WH6940R, RL560WH6940C

9.4W - RL560WH6830, RL560WH6835

9W - RL560WH6840, RL560WH6840R, RL560WH6840C

Input Current: 0.15A

Maximum IC (Insulated Ceiling) Ambient Continuous Operating Temperature: 25°C (77°F)

Maximum Non-IC Ambient Continuous Operating Temperature 40°C (104°F)



E26 Screw base adapter for retrofit (included)

## Ordering Information

Sample Number: **RL560WH6827-RL56TRMWH**

Complete unit includes a RL56 Baffle-Trim LED Module and a 5" or 6" compatible housing, ordered separately. Optional accessory designer trim ring ordered separately.

### RL56 600 Series

#### 80 CRI

**RL560WH6827**= 5"/6" Retrofit Baffle - Trim LED Module, 80CRI, 2700K, Matte White

**RL560WH6830**= 5"/6" Retrofit Baffle - Trim LED Module, 80CRI, 3000K, Matte White

**RL560WH6835**= 5"/6" Retrofit Baffle - Trim LED Module, 80CRI, 3500K, Matte White

**RL560WH6840**= 5"/6" Retrofit Baffle - Trim LED Module, 80CRI, 4000K, Matte White

#### 90 CRI

**RL560WH6927**= 5"/6" Retrofit Baffle - Trim LED Module, 90CRI, 2700K, Matte White

**RL560WH6930**= 5"/6" Retrofit Baffle - Trim LED Module, 90CRI, 3000K, Matte White

**RL560WH6935**= 5"/6" Retrofit Baffle - Trim LED Module, 90CRI, 3500K, Matte White

**RL560WH6940**= 5"/6" Retrofit Baffle - Trim LED Module, 90CRI, 4000K, Matte White

### Accessory (Order Separately)

**RL56TRMSN**=5/6" Satin Nickel Trim Ring

**RL56TRMTBZ**=5/6" Tuscan Bronze Trim Ring

**RL56TRMWH**=5/6" White Paintable Trim Ring

**RL56CLIP**=Replacement kit of 5" and 6" Friction Clips for retrofitting into an existing housing without torsion spring receiving brackets. (One set of clips included with the unit.)

**OT400P**=Oversize Flat White Metal Trim Ring 6" I.D. x 9-1/4" O.D. (ring slips behind RL56 ring, in stepped configuration)

**OT403P**=Oversize White Plastic Trim Ring 6" I.D. x 8" O.D. (ring slips behind RL56 ring, in stepped configuration)

**TRM690WH**=Oversize Matte White Metal Trim Ring. Designed for RL560 ring to inset into oversize ring for an even (non-stepped) trim surface

**HE26LED**=Replacement screw base adapter (one included with unit)

## Housing Compatibility

### RL56 Series LED Retrofit is UL Classified for retrofit in the follow 5/6" recessed housings:

The RL Series LED light module - trim combination is cULus Listed or UL Classified for use with any 5"/6" diameter recessed housing constructed of steel or aluminum with an internal volume that exceeds 107.9 in<sup>3</sup> in addition to those noted above.

**HOUSINGS - Halo and All-Pro UL Listed Compatibility**

**Compatible Halo LED Housings with LED luminaire connector (high efficacy compliant - Title 24, IECC, WSEC)**

Recessed Can Size	Catalog Number	Description
<b>5"</b>	H550ICAT	5" LED, Insulated Ceiling, AIR-TITE, New Construction Housing
	H550RICAT	5" LED, Insulated Ceiling, AIR-TITE, Remodel Housing
<b>6"</b>	H750ICAT	6" LED, Insulated Ceiling, AIR-TITE, New Construction Housing
	H750RICAT	6" LED, Insulated Ceiling, AIR-TITE, Remodel Housing
	H750T	6" LED, Non-IC, AIR-TITE, New Construction Housing
	H750RINTD010	6" LED, Non-IC, AIR-TITE, Remodel International Housing
	H750TCP	6" LED, Non-IC, New Construction/Remodel Chicago Plenum Housing
	H2750ICAT	6" LED, Shallow, Insulated Ceiling, AIR-TITE, New Construction Housing

**Compatible Halo Incandescent E26 Screwbase Housings**


<b>5"</b>	H51CAT	5" Insulated Ceiling, AIR-TITE New Construction Housing
	H51RICAT	5" Insulated Ceiling, AIR-TITE Remodel Housing
	H5T	5" Non-IC, New Construction Housing
	H5RT	5" Non-IC, Remodel Housing
	H5TM	5" Non-IC, New Construction Housing (metric version - Canada)
	H251CAT	5" Shallow, Insulated Ceiling, AIR-TITE New Construction
<b>6"</b>	H71CAT	6" Insulated Ceiling, AIR-TITE New Construction Housing
	H71RICAT	6" Insulated Ceiling, AIR-TITE Remodel Housing
	H71CT	6" Insulated Ceiling, New Construction Housing
	H71RICT	6" Insulated Ceiling, Remodel Housing
	H71CATNB	6" Insulated Ceiling, AIR-TITE New Construction Housing, No Socket Bracket
	H71CTNB	6" Insulated Ceiling, New Construction Housing, No Socket Bracket
	H7T	6" Non-IC, New Construction Housing
	H7RT	6" Non-IC, Remodel Housing
	H7TNB	6" Non-IC, New Construction Housing, No Socket Bracket
	H7TCP	6" Non-IC, Chicago Plenum, New Construction/Remodel Housing
	H7U1CT	6" Insulated Ceiling, Universal New Construction Housing
	H7U1CAT	6" Insulated Ceiling, Universal, AIR-TITE, New Construction Housing
	H271CAT	6" Shallow, Insulated Ceiling, AIR-TITE New Construction Housing
	H271RICAT	6" Shallow, Insulated Ceiling, AIR-TITE Remodel Housing
	H271CT	6" Shallow, Insulated Ceiling, New Construction Housing
	H271RICT	6" Shallow, Insulated Ceiling, Remodel Housing
	H27T	6" Shallow, Non-IC, New Construction Housing
	H27RT	6" Shallow, Non-IC, Remodel Housing
ML7BXRFK	6" Retrofit Enclosure, Non-IC, BX Whip	
ML7E26RFK	6" Retrofit Enclosure, Non-IC, E26 Screw base Interface	

**All-Pro Compatible Incandescent E26 Screwbase Housings**


<b>5"</b>	E1500AT	5" Insulated Ceiling, AIR-TITE New Construction Housing
	E1500RAT	5" Insulated Ceiling, AIR-TITE Remodel Housing
	ET500	5" Non-IC, New Construction Housing
	ET500R	5" Non-IC, Remodel Housing
<b>6"</b>	E1700AT	6" Insulated Ceiling, AIR-TITE New Construction Housing
	E1700RAT	6" Insulated Ceiling, AIR-TITE Remodel Housing
	E1700	6" Insulated Ceiling, New Construction Housing
	E1700R	6" Insulated Ceiling, Remodel Housing
	E1700ATNB	6" Insulated Ceiling, AIR-TITE New Construction Housing, No Socket Bracket
	E1700NB	6" Insulated Ceiling, New Construction Housing, No Socket Bracket
	E1700U	6" Insulated Ceiling, Universal New Construction Housing
	E1700UAT	6" Insulated Ceiling, Universal, AIR-TITE, New Construction Housing
	ET700	6" Non-IC, New Construction Housing
	ET700R	6" Non-IC, Remodel Housing
	E12700AT	6" Shallow, Insulated Ceiling, AIR-TITE New Construction Housing
	E12700	6" Shallow, Insulated Ceiling, New Construction Housing
	E12700R	6" Shallow, Insulated Ceiling, AIR-TITE Remodel Housing
	ET2700	6" Shallow, Non-IC, New Construction Housing
	ET2700R	6" Shallow, Non-IC, Remodel Housing

**Lighting Facts**


**RL560WH6827**  
2700K Source

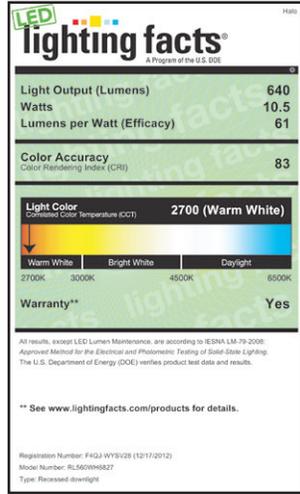


**RL560WH6830**  
3000K Source

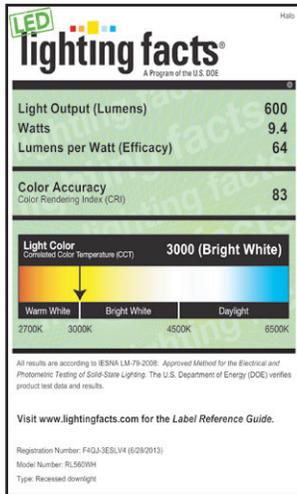


**RL560WH6835**  
3500K Source

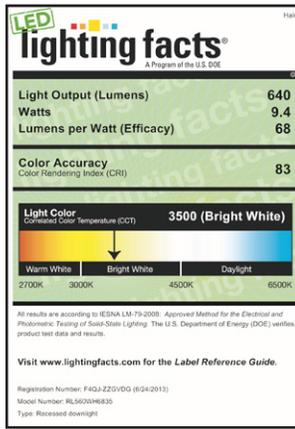


**RL560WH6840**  
4000K Source

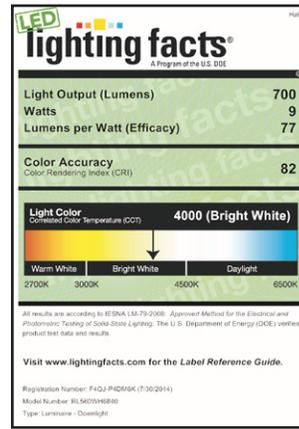

**RL560WH6930**  
3000K Source

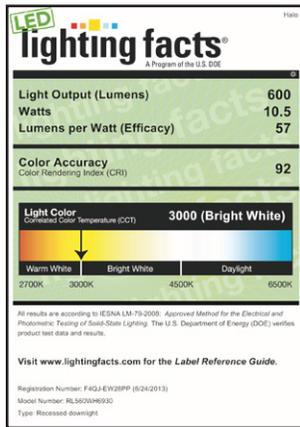

**RL560WH6935**  
3500K Source

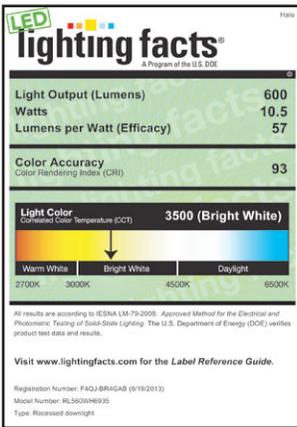

**RL560WH6940**  
4000K Source

