**PRODUCT FEATURES:**

Tall single handle sink faucet.  
Mechanical stop system to operated the lever handle.  
Single control cartridge 35 mm.  
High hardness ceramic discs assures and extend cartridge lifetime without leakage.  
Easy installation and maintenance.  
This product can be used to help achieve water efficiency goals as well as gaining USGBC LEED points.

**MATERIALS:**

Solid brass, for durability and reliability.  
Finishes with ultra high resistance to corrosion and tarnishing.

**ACCESORIES:**

5/64" allen wrench.

**INSTALLATION:**

1/2" - 14 NPSM connection.

**OPERATION:**

To open the water flow lift the lever and to close push the lever. To adjust the water temperature, turn left for hot and turn right for cold.




**CODES AND STANDARDS:**

ASME A112.18.1 / CSA B125.1-2018,  
Plumbing Supply Fittings  
NSF/ANSI 61/ANSI-2020, Drinking Water  
System Components - Health Effects  
NSF/ANSI 372-2016, Drinking Water Systems  
Components - Lead Content  
EPA Water Sense High-Efficiency Lavatory Faucet  
CEC/DOE-ENERGY POLICY ACT 1992

**FINISHINGS:**

BB PVD Brushed Brass  
BW Bright White  
MB Matte Black  
PC Polished Chrome  
PCO PVD Polished Copper  
PG PVD Polished Gold  
PGH PVD Polished Graphite  
PN PVD Polished Nickel  
RG PVD Rose Gold  
SC PVD Satin Copper  
SGH PVD Satin Graphite  
SN PVD Satin Nickel  
SRG PVD Satin Rose Gold

Estimated Dimensions Dim. inch. [mm]

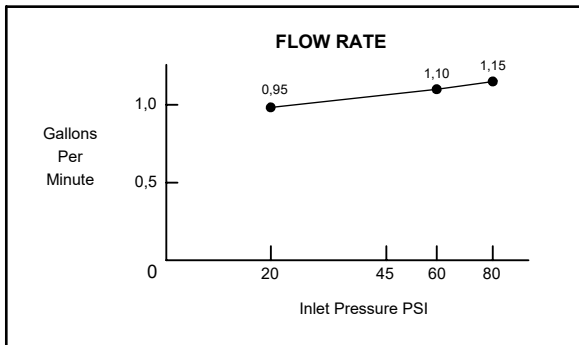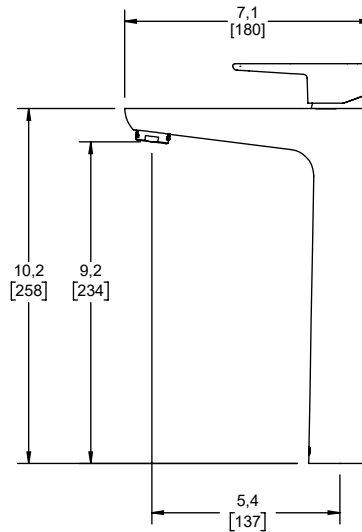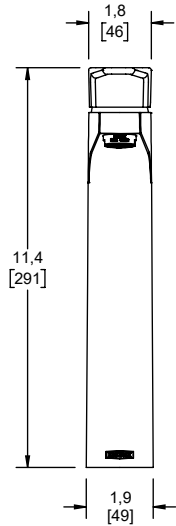

**WORKING PRESSURE:**

Pmin.= 20 PSI  
 Pmax.= 80 PSI

**MAXIMUM FLOW RATE:**

1,2 GPM

**NOTES:**

Install the product according to the Installation Guide.