


# How to Measure Your Door

## CHOOSE YOUR DOOR HANDING AND SWING

Masonite doors can be installed for right or left handed operation (as viewed from outside the home)

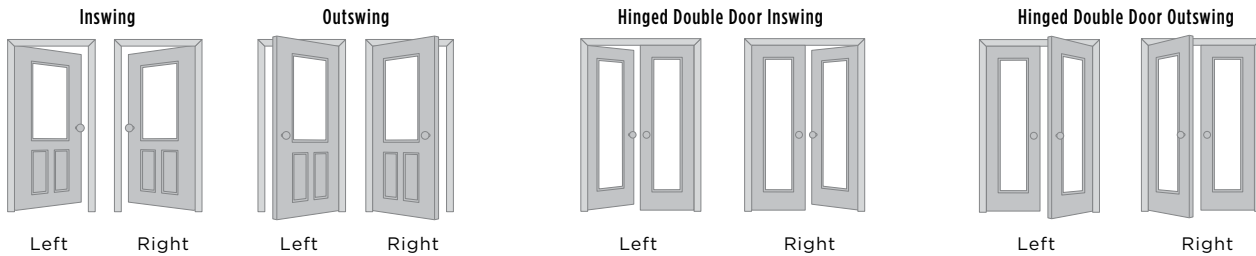

## MEASURE THE WIDTH OF YOUR EXISTING DOOR JAMB:

- 4-9/16"       6-9/16"       Other


## MEASURE THE EXISTING ROUGH OPENING

To ensure accurate measurements, first remove the interior casing on the sides and top of your single or double door to reveal rough opening frame.

1. Measure from inside the face of one stud to inside the face of the other stud **A** and write down the measurement.
2. Measure from the subfloor (plywood or concrete) to the bottom of the header above the door **B** and write down the measurement.

Measurement A \_\_\_\_\_

Measurement B \_\_\_\_\_



Sidelites are shown for example and may not be in your existing opening.

## ROUGH OPENING SPECIFICATIONS FOR UNITS WITH 36" WIDE DOOR

Door Width*		Rough Opening
Single 36"		38-1/4" x 82-1/8"
Single 36"	One 12" sidelite	51-3/4" x 82-1/8"
Single 36"	Two 12" sidelites	65-1/4" x 82-1/8"
Single 36"	Two 12" sidelites with rectangle transom	65-1/4" x 95-3/4"
Single 36"	Two 12" sidelites with ellipse transom	65-1/4" x 96-1/2"
Double 36"		74-3/4" x 82-1/8"

\*For 32" wide doors, deduct 4" from the rough opening width sizes.

\*Rough opening specifications are for inswing units.

\*For outswing units, deduct 1-1/8" from the rough opening height.

\*Rough opening specifications for transom units are for decorative glass transoms.

\*Note: transoms will be supplied unattached from the door unit.