

CHANDELIER LIGHT (CHAIN)
 Assembly Instructions
 Model#: 70529

CAUTION

- Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.
- Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

TOOLS
 REQUIRED



Ladder




Safety glasses



Electrical tape



Phillips screwdriver




Flat blade screwdriver




Pliers




Wire strippers



Fixture




Chain




Metal plate




Canopy




Decorative tube



Mounting Unit

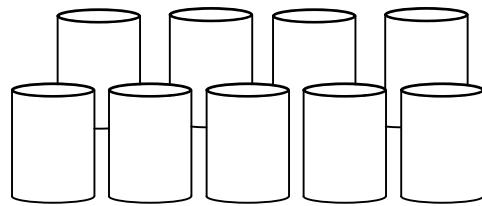


Glasses



Mounting Screws



Wire Nuts



Lampholder ring

*PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE


CHANDELIER LIGHT (CHAIN)

Assembly Instructions

Model#:70529


STEP 1

Screw the metal plate onto fixture before unfold the fixture arm.

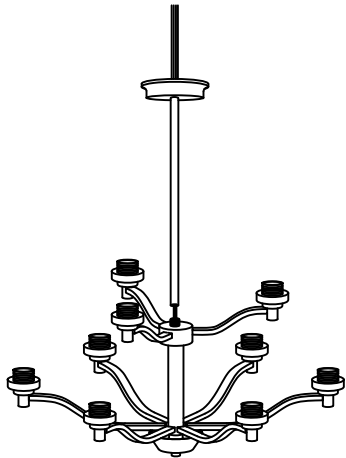


STEP 3

Screw the chain to the fixture. Make sure to feed the branchwires of the fixture through the chain during assembly.

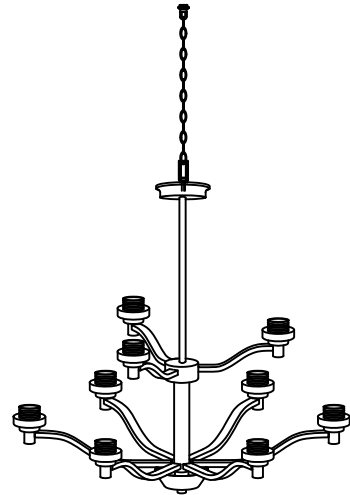


STEP 2

Install decorative tube onto fixture

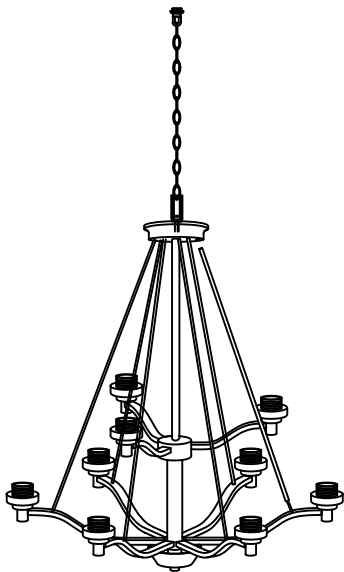

STEP 4

Use the mounting screws to attach the mounting unit to the junction box

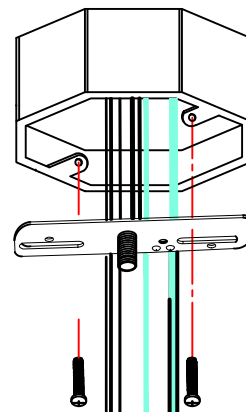

CHANDELIER LIGHT (CHAIN)

Assembly Instructions

Model#:70529 BN

STEP 5



Make the electrical connection from the junction box to the fixture. Connect the ground wire to the mounting unit using the preinstalled green ground screw. Then, connect the positive, negative and ground wires with the supplied wire nuts. Secure with electrical tape

Connect Clear, Brown, Gold or Black Parallel Wire without tracer (round & smooth) or Black Fixture Wire to:

Black or Red Supply Wire or Insulated Wire (other than green) with copper conductor.


Connect Clear, Brown, Gold or Black *Parallel Wire with tracer (square & ridged) or White Fixture Wire to:

White Supply Wire or Insulated Wire (other than green) with silver conductor

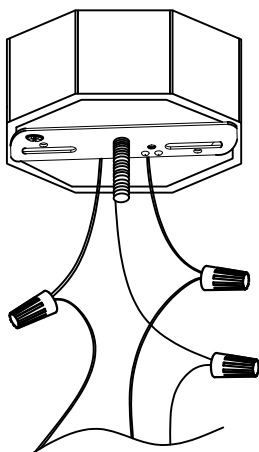


STEP 6

Screw the canopy to the mounting unit with the screw collar ring

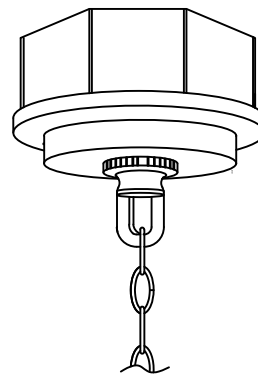

STEP 7

Install the glass by lampholder ring

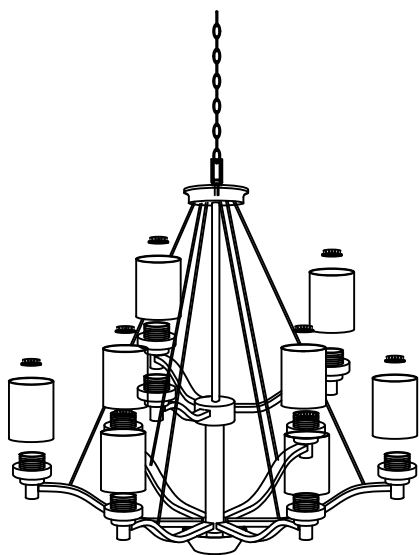

STEP 8

Install bulbs (not included)

E26 Type A
60W*9

