


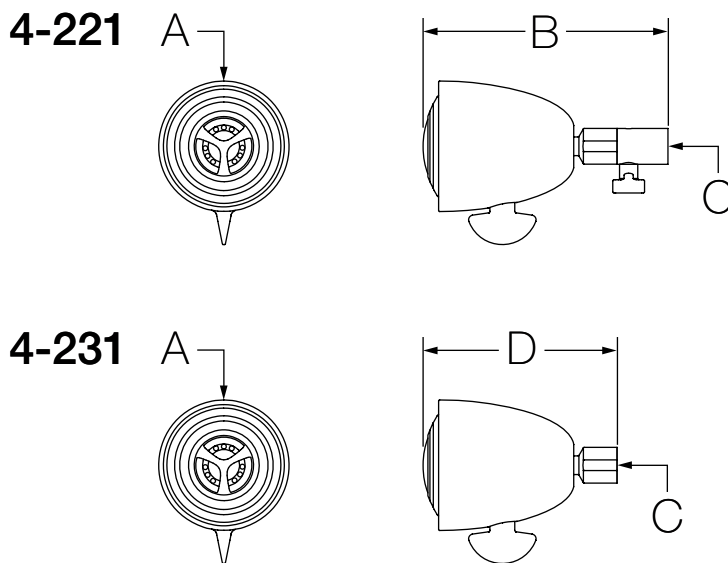


4-221, 4-231  
 2 Mode Showerhead Series  
 Specification Submittal



<b>Model Numbers</b>  <input type="checkbox"/> <b>4-221</b> <i>2 mode showerhead with external volume control</i>  <input type="checkbox"/> <b>4-231</b> <i>2 mode showerhead</i>	<b>Feature Highlights</b>  <ul style="list-style-type: none"> <li>• 2 mode showerhead</li> <li>• External volume control (4-221 only)</li> <li>• 3-5/16" diameter</li> <li>• Female ball joint adapter</li> <li>• 2.5 gpm (9.5 L/min) standard flow restrictor</li> </ul>
<b>Options/Modifications</b>  <input type="checkbox"/> <b>-1.5</b> <b>CG</b> <i>1.5 gpm (5.7 L/min) flow restrictor</i> <input type="checkbox"/> <b>-2.0</b> <i>2.0 gpm (7.6 L/min) flow restrictor</i> <input type="checkbox"/> <b>-M</b> <i>Male connection</i> <input type="checkbox"/> <b>-STN</b> <i>Satin Nickel finish</i>  <p><b>Note:</b> Append appropriate -suffix to model number.</p>	<b>Compliance</b>  - ASME A112.18.1/CSA B125.1 - WaterSense 1.5 gpm, 2.0 gpm (4-231 only)   <b>Warranty</b>  <b>Limited Lifetime</b> - to the original end purchaser in consumer/residential installations. <b>5 Years</b> - for industrial/commercial installations. Refer to <a href="http://www.symmons.com/warranty">www.symmons.com/warranty</a> for complete warranty information.

**Dimensions**



Measurements	
A	Ø 3-5/16", 84 mm
B	6-1/8", 156 mm
C	1/2-14 NPT
D	4-5/8", 117 mm

**Note:** Dimensions subject to change without notice.