

Kitchen Sink Strainer Installation Guide


Important Information

- This installation guide is subject to change without notice, please contact seller to request the most updated version of this installation guide.
- Observe all local plumbing and building codes.
- This is only a general installation guideline, actual installation may vary. Consult a professional if necessary.
- Product drawings in this installation guide is for illustration purpose only. Actual product may vary by models.
- Read and understand this installation guide completely.
- It is recommended that the installation of this product be performed by trained and experienced installers.
- Plumers putty is recommended when installing this product.

Maintenance Guide

Please follow the cleaning material manufacturer's instructions. Damage caused by improper treatment will not be covered by product warranty. In addition, pay attention to the following points:

- Regular cleaning can prevent mineral build up on surface.
- Carefully read the cleaner product label to ensure the cleaner is safe for use on the material.
- Test the cleaner on a small area before using on the entire surface.
- Use a mild detergent such as liquid dishwashing soap and warm water for cleaning.
- Do not use abrasive / harsh chemical when cleaning the fixture as they will damage and dull the finish.
- When using spray cleaners, spray first onto a soft cloth or sponge. Never spray directly onto the faucet as droplets can enter openings and gaps and cause damage.
- After cleaning, rinse thoroughly with clean water to remove any cleaner residue.

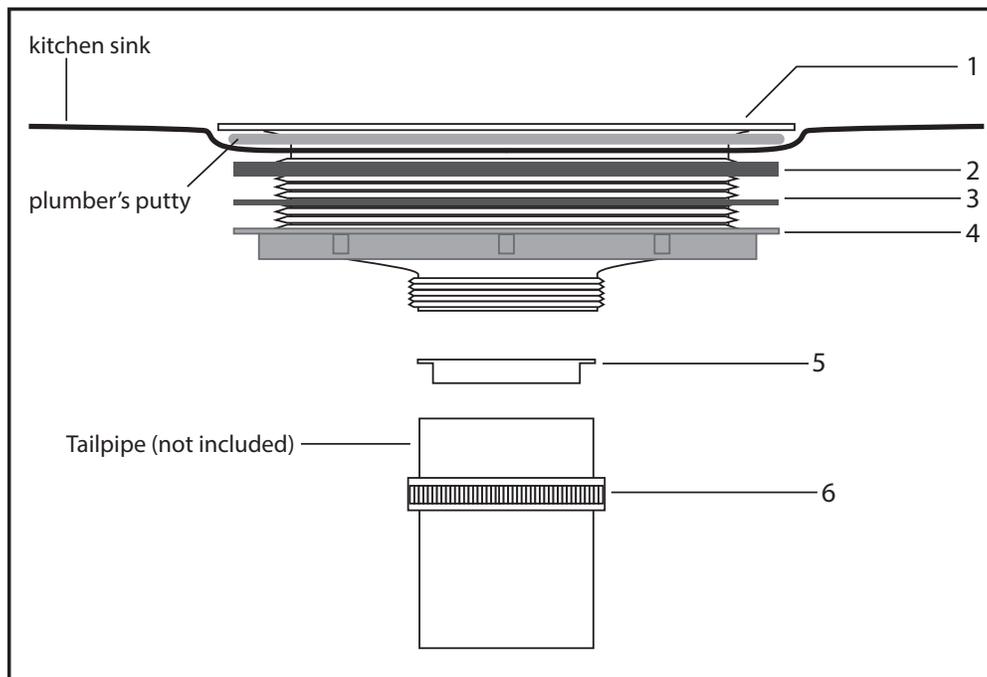

Parts List:

1. Drain Body
2. Rubber Gasket
3. Fiber Gasket
4. Locking Nut
5. Tailpipe Washer
6. Tailpipe Nut

Tools Needed:

1. Safety glasses
2. Plumber's putty
3. Channel lock plier or adjustable wrench

1. Remove old strainer from sink and scrape off any remaining putty. Remove any remaining debris or dirt with soft cloth or paper towel from the sink.
2. Take some fresh plumber's putty and knead the putty into a ring shape that is enough to cover around the drain opening on the sink.
3. Place the Drain Body (#1) in the sink opening from the top and press down the drain with even pressure. Some putty will begin to squeeze out from the side of the drain. Remove excess putty with your fingers. Make sure the drain is sitting level in the sink.
4. From underneath the sink, remove excess putty and install Rubber Gasket (#2), Fiber Gasket (#3) and Locking Nut (#4) onto the drain body. Use a channel lock plier or a wrench to tighten the locking Nut. (**NOTE:** Do not over tighten the nut. You may need to hold the drain in place from the top of the sink to prevent the drain from slipping.)
5. Slip the Tailpipe Nut (#6) onto the tailpipe (not included) and insert the Tailpipe Washer (#7) into the tailpipe. Connect the tailpipe to the drain body with a wrench. (**NOTE:** Do not over tighten the nut)