



Toilet Seat Installation


1



Insert the toilet seat hinge gasket (KK) onto the bottom of the hinge.

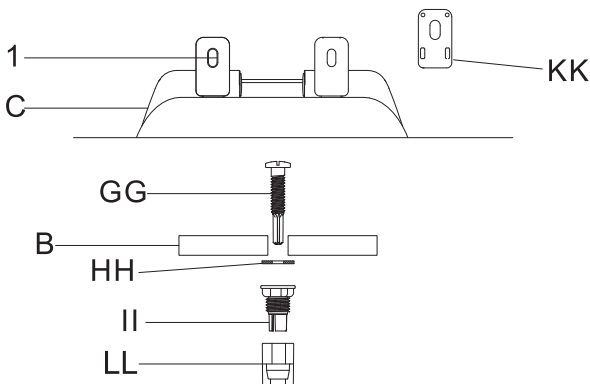


2

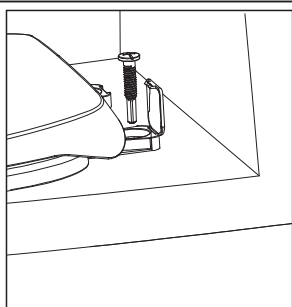


Insert the lock-bolt (GG) in the bolt trough (1).

3

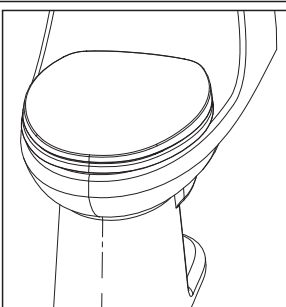


Adjust the seat match with the toilet bowl.

4

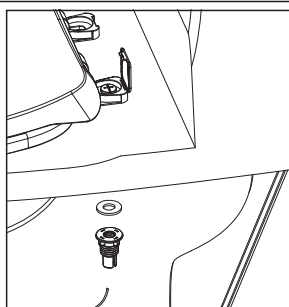


Place the washer (HH) and the inner lock-nut (II) onto the lock bolt (GG) from underneath the toilet (B).

5

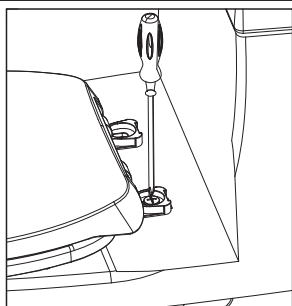


Use a screwdriver to hold the lock-bolt (GG) then tighten the inner lock-nut (II).

6

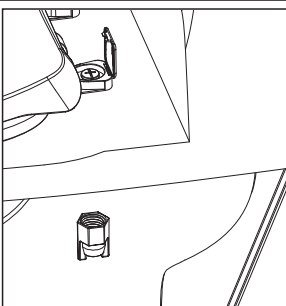

Attach the outer lock-nut (LL) to hold the inner lock-nut (II) firmly.

7

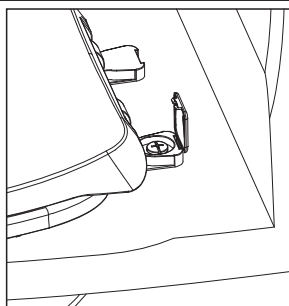

Close the bolt trough cover and snap into place.