



LEAKNO GASKET

INSTALLATION INSTRUCTIONS


Instrucciones de instalación

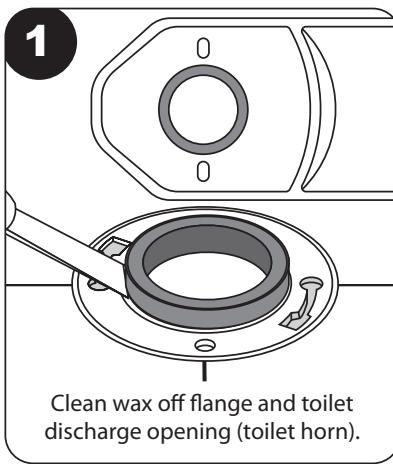


Clean wax off flange and toilet discharge opening (toilet horn).

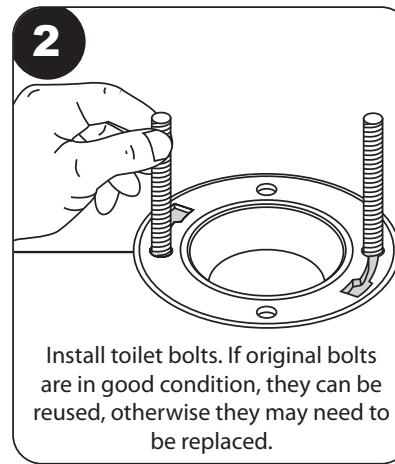


Install toilet bolts. If original bolts are in good condition, they can be reused, otherwise they may need to be replaced.

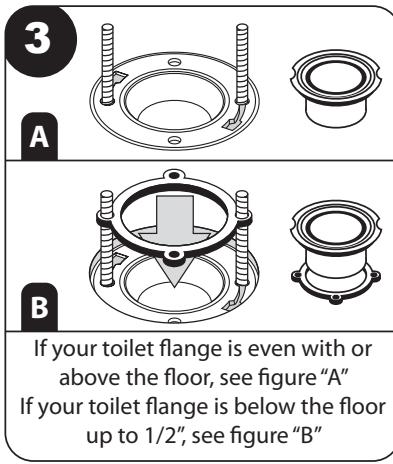


If your toilet flange is even with or above the floor, see figure "A"
If your toilet flange is below the floor up to 1/2", see figure "B"

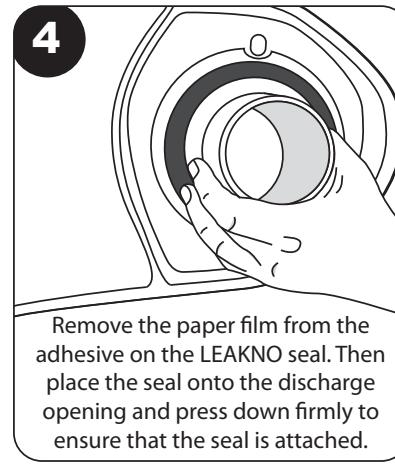


Remove the paper film from the adhesive on the LEAKNO seal. Then place the seal onto the discharge opening and press down firmly to ensure that the seal is attached.

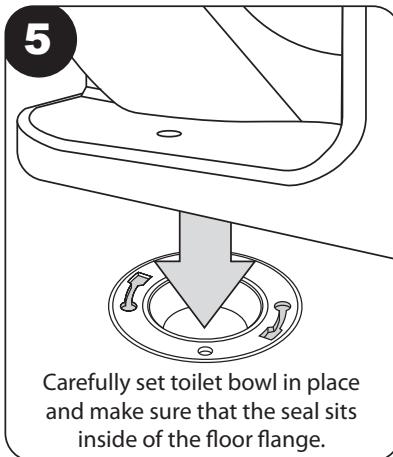


Carefully set toilet bowl in place and make sure that the seal sits inside of the floor flange.

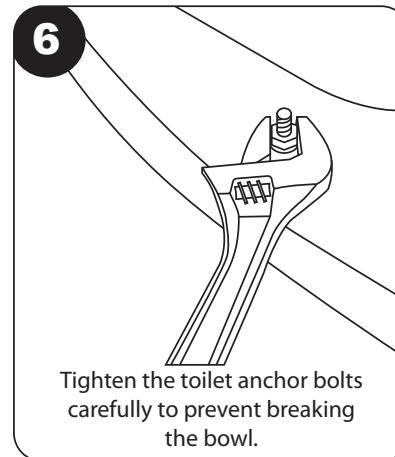

Tighten the toilet anchor bolts carefully to prevent breaking the bowl.

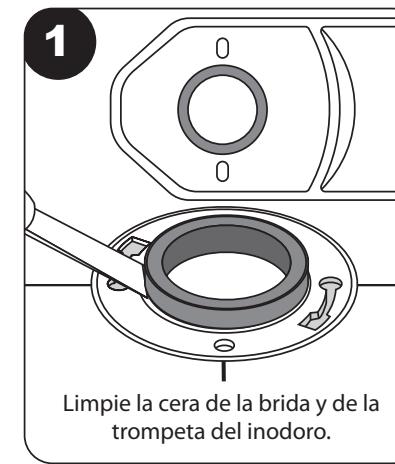

Limpie la cera de la brida y de la trompeta del inodoro.

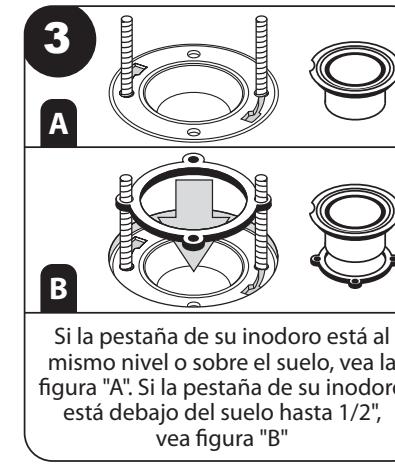


Si la pestaña de su inodoro está al mismo nivel o sobre el suelo, vea la figura "A". Si la pestaña de su inodoro está debajo del suelo hasta 1/2", vea figura "B"



Cuidadosamente establezca la taza del inodoro en su lugar y asegúrese que el sellador se siente dentro la brida del piso



Instale los tornillos del inodoro. Si los tornillos originales están en buen estado, pueden volverse a usar, de lo contrario deben reemplazarse.

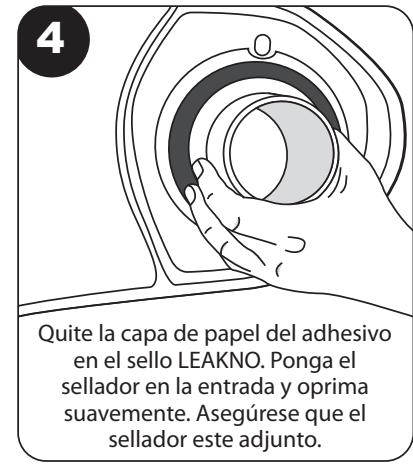

Quite la capa de papel del adhesivo en el sello LEAKNO. Ponga el sellador en la entrada y oprima suavemente. Asegúrese que el sellador este adjunto.



Apriete los pernos de anclaje cuidadosamente para evitar romper la taza.