

PALRUF®

Corrugated PVC Sheet

Available in Four Colors
& Two Light Transmission Levels


Accessories to
Complete Your Project

| Palram Products Compared | PALRUF® GOOD | SUNTOP® BETTER | SUNTUF® BEST |
|--------------------------|-------------------------------|---------------------------------|---------------------------------|
| Impact resistance | Good | Better | Best |
| Chemical resistance | Best | Good | Good |
| Snow load capacity | Good | Better | Best |
| Temperature range | -4°F to 120°F (-20°C to 49°C) | -40°F to 212°F (-40°C to 100°C) | -40°F to 212°F (-40°C to 100°C) |
| UV Protection | 100% | 100% | 100% |
| Flame resistance | Good | Good | Good |
| Cost effectiveness | Good | Better | Best |
| Warranty | 5 Year Limited | 10 Year Limited | Lifetime Limited |

Typical Uses Around The Home & On The Farm

- Deck skirting
- Water proof under decking
- Shade canopies
- Car ports
- Awnings
- Walkway covers
- Fences
- Car washes
- Patio covers
- Fences


Just a few ideas of what you can do with
PALRUF Corrugated Panels!




Clear
90% Light
Transmission



White Opaque
No Light
Transmission



Green Opaque
No Light
Transmission




Beige Opaque
No Light
Transmission

3 Standard Sizes

26" W x 8' L 26" W x 10' L 26" W x 12' L
Palruf Beige is only available in 26" W x 8' L.

Note: 26" panel covers 24" with 1 corrugation overlap.

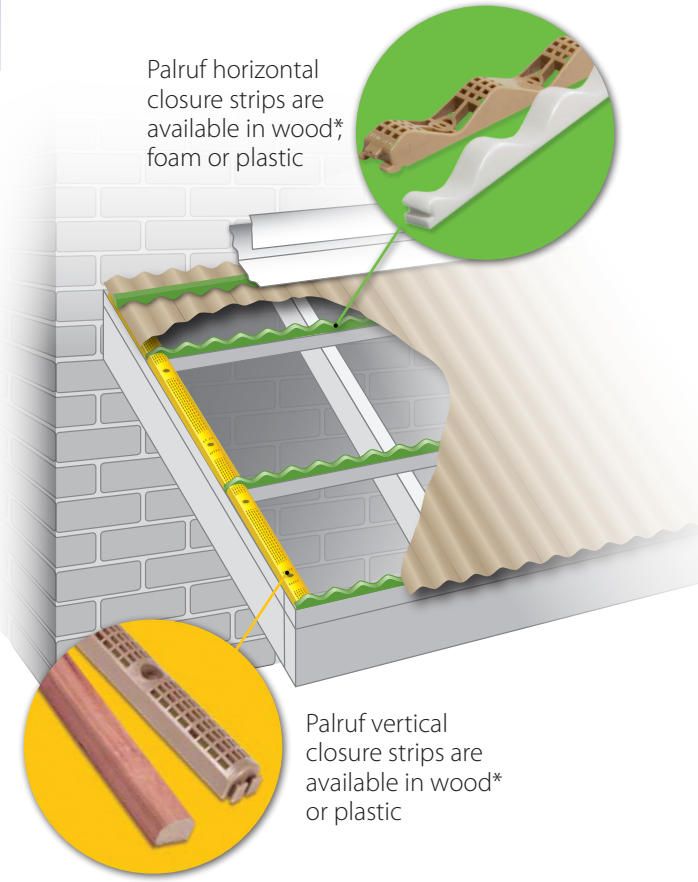

Palruf horizontal
closure strips are
available in wood*,
foam or plastic

Palruf vertical
closure strips are
available in wood*
or plastic

*Available in select markets only.
Flashings shown are available from third parties.

Special EPDM Washered Fasteners

MetalTite®
1" or 2" for
installation with
metal framing



WoodTite®
1" or 2" for
installation with
wood framing

PALRUF®

The Affordable Corrugated PVC Panel that's Perfect for Your DIY Projects.

PALRUF is a chemically resistant and durable covering for roofing, siding or cladding in industry, agriculture, construction or DIY. PALRUF is extremely easy to install and maintain, and is available in a wide variety of profiles and colors. Generally speaking, PALRUF should be used only for open-sided, well ventilated projects.

Features and Benefits:

- Easily handled, quickly installed
- Requires minimal maintenance
- High chemical resistance
- Fire retardant—meets the highest standards
- UV & weather resistant
- Non-corrosive—does not rust or corrode
- Enables arched roofs and curved walls

For detailed information on physical properties, please visit palram.com/us



PALRUF®

CORRUGATED PVC SHEET
Five Year Limited Warranty

PALRUF is warranted for 5 years against weatherability and structural reliability. The above warranty shall apply only if the panels are installed, used and maintained in accordance with Palram recommendations and specifications.

Distributed by:



PALRAM AMERICAS
9735 Commerce Circle
Kutztown, PA, 19530 USA
Tel: 800.999.9459
contactus.usa@palram.com



Form 202 - 12/01/19 KMP

PALRUF®

Corrugated PVC Sheet



Before You Begin

Make sure the color of all panels match. Be sure panel and horizontal closure support strip fit together...

PALRUF is comprised of round corrugations. Snow, wind and weather loads should be considered when designing the slope degree of your structure. Before installation, check local building codes for relevant specifications and recommendations. Follow local codes at all times.

TRANSPORTATION, HANDLING AND STORAGE: Do not transport, leave or store panels in direct sun before or during installation.

For outdoor storage, cover securely with a colored tarpaulin to avoid solar heat gain between the panels. Sunlight is magnified when passing through uncovered sheets, increasing the temperature of the sheets, which leads to degradation and distortion. Penetration of water between the sheets in storage will accentuate this heat gain. Therefore, it is recommended to store the panels indoors. Panels will withstand heat when properly installed and ventilated. Store the panels stacked evenly on a horizontal flat surface with longer lengths on the bottom. Do not stack other items on top of panels. If panels are not stacked directly on floor, be sure to support evenly. **IMPORTANT: If PALRUF panels have been stored at temperatures below 40° F, allow panels to acclimate to room temperature before cutting.**

| LOAD SUPPORT TABLE | Pounds per Sq. Ft. | 20 psf | 30 psf |
|--------------------------|-----------------------|--------|--------|
| | PALRUF Purlin Spacing | 24" | 16" |

FLEXIBLE ENOUGH FOR CURVED STRUCTURES: PALRUF panels may be used in curved applications, as long as the radius of the curve is not less than 13 feet.

PALRUF ACCESSORIES

- 1. PALRUF plastic vertical closure strip
7/8" H x 1-3/16" W x 24" L
PALRUF wood vertical closure strip*
7/8" H x 1-3/16" W x 24" L
- 2. PALRUF plastic horizontal closure strips
3/4" x 7/8" W x 24" L
PALRUF foam horizontal closure strips
3/4" x 7/8" W x 36" L
PALRUF wood horizontal closure strips*
3/4" x 7/8" W x 24" L
- 3. EPDM washered fasteners
(see lower right corner for more info.)

Note: flashings shown below are available from third parties.
*Available in select markets only.



BE SURE TO CAREFULLY READ ALL INSTRUCTIONS

Installation details for typical canopy structure