

HOW TO ASSEMBLE THE 30 IN. DOUBLE BAGGER ON A TROY-BILT LAWN TRACTOR

1 TO BEGIN:

- a. Park on a flat surface, engage the parking brake and remove the key.




- b. Familiarize yourself with the specific owner's manual and instructions.



2 ASSEMBLE THE MOUNT:

- a. You will need to remove the 4 bolts that came with the unit, using a 1/2" wrench.

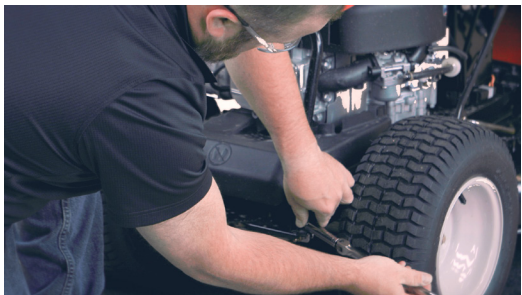

- b. Assemble the mount to the frame and tighten using the 4 new bolts, using a 1/2" wrench.



3 VERTICAL SUPPORT:

- a. Slide vertical support on the mounting bracket.



- b. Connect to the center hole using wing knob and bolt.

4 TOP BAGGER COMPONENTS:

- a. Snap plastic upper chute support in place.



- b. Using a 3/4" wrench, secure the two lock nuts.
- c. Add both bags.



(Continued on next page)

HOW TO ASSEMBLE THE 30 IN. DOUBLE BAGGER ON A TROY-BILT LAWN TRACTOR


5 INSTALL THE BOOT:

- Remove the existing deck cover.
- Secure the boot with both wing knobs.



6 ASSEMBLE THE FRONT WEIGHT:

- Use 1/2" wrenches.
- Remove the existing front bumper, use a 3/8" wrench.
- Remove the cotter pin to release the steering rod.
- Guide the weight into place and secure using two 1/2" wrenches.

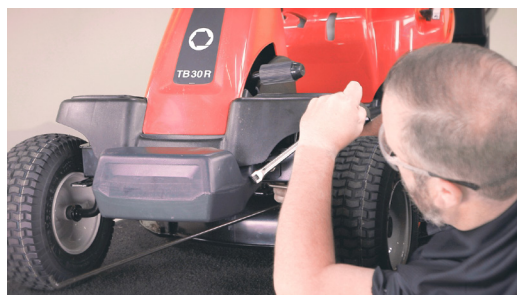

- Replace the cotter pin to re-connect the steering rod.