


## Instructions for Models:

S-4000  
S-4001  
S-4002

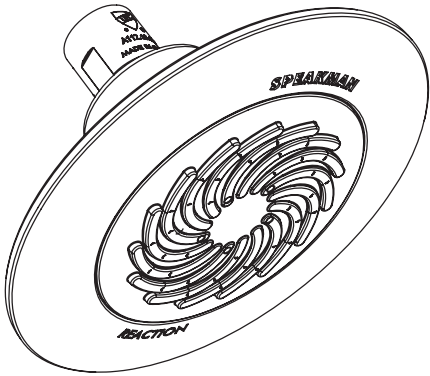

### Need Help?

For additional assistance or service call:

**SPEAKMAN** Company  
400 Anchor Mill Road  
New Castle, DE 19720

PHONE: 800-537-2107  
EMAIL: [customerservice@speakmancompany.com](mailto:customerservice@speakmancompany.com)  
WEB: [www.speakmancompany.com](http://www.speakmancompany.com)


92-S-4000-R2

## What You Need To Know:

### Tools:

#### Required:

\*Thread Seal Tape \*Adjustable Wrench

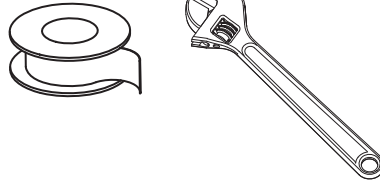

### Important Notes:

Be sure to read instructions thoroughly before beginning installation. Do not overtighten any connections or damage may occur.

### Safety Tips:

Cover your drain to prevent loss of parts.

### Maintenance:

Periodic cleaning using a mild soap and warm water will help keep your showerhead's appearance in its original condition.


For best results, dry immediately with a soft, clean cloth. DO NOT USE harsh and/or abrasive cleaners.

In certain water conditions, mineral deposits may form. To remove these deposits, it is recommended that you soak the showerhead in a solution of 2 parts vinegar to 1 part water for one hour. Rinse thoroughly with fresh water. Brush off any remaining mineral deposits from the spray channels.



### Warranty:

Warranty information can be found at:  
[www.speakmancompany.com](http://www.speakmancompany.com)

- 1 Apply Thread Seal Tape to the outlet side of shower arm in a clockwise direction.



- 2 Thread Showerhead onto shower arm by turning it in a clockwise direction. Tighten with adjustable wrench. Turn water supply on and check for leaks.

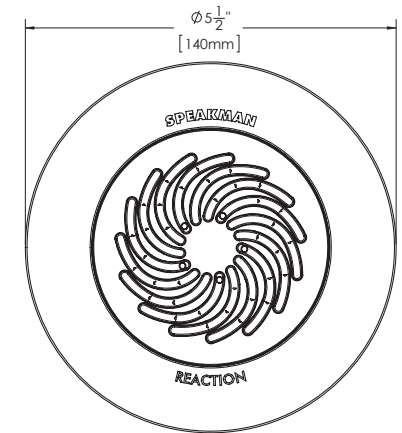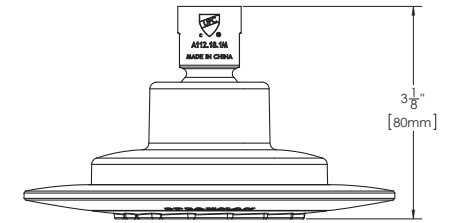

### Specifications:

Inlet: 1/2" NPT FEMALE