


VINYL CLAD REPLACEMENT WEATHER-STRIP

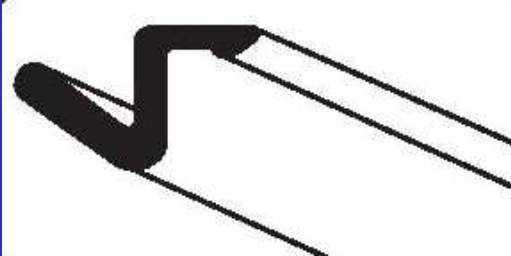

1. Weather-strip Installs into slot in door jamb
2. Remove old weather-strip by pulling it out of the slot in the door jamb.
3. Clean any debris from the slot in the door jamb
4. Measure the left side of the door jamb at the slot and cut a piece of weather-strip to length
5. Starting at the top, push the rigid end of the weatherstrip into the slot. Trim excess
6. Repeat steps on the right side and top of the door to complete the project.