


- 8P8-WS2-LRSC Finish(C)
- 8P8-WS2-LRSGS Finish(GS)
- 8P8-WS2-LRSY Finish(Y)

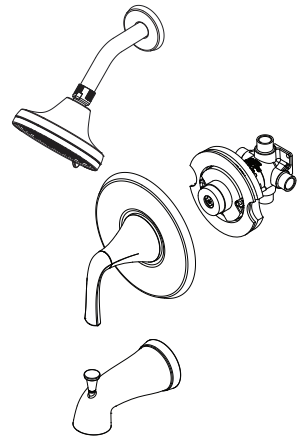

### Specifications

#### Features

- 1.8 GPM Flow Rate
- Spot Defense Finish Resists Spots and Fingerprints (GS Finish Only)
- 3 Function Showerhead (Full Spray, Massage, and Full Spray/Massage Combo)
- SecurePfit™ with Anti Handle Wobble
- Includes OX8 Valve
- Pressure Balanced
- Temperature Limit Stop
- Pforever Seal Ceramic Disc Valve
- Pforever Warranty®

#### Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- ASSE 1016
- Cal Green Compliant
- CEC Compliant
- EPA WaterSense Certification 1.8 gpm, 6.8L/Min



### Dimensions

