WaterBoss® WATER SOFTENER



Model 700

22,000 grain capacity

- Softens and Filters
- Regenerates in 17 minutes
- Use as little as 12 gallons of water and only 2.5lbs of salt to regenerate.



Model 900

36,400 grain capacity

- Softens and Filters
- Regenerates in 20 minutes
- Use as little as 14 gallons of water and only 3lbs of salt to regenerate.

Reduces:

Ca Calcium — *Calcium*

Fe^{2+} — *Ferrous Iron*

Dirt & Sediments

Special Order



Model 950
City Unit

22,000 grain capacity

- Reduces Chlorine Taste and Odor
- Softens and Filters
- Regenerates in 17 minutes
- Use as little as 14 gallons of water and only 2.5lbs of salt to regenerate.

MODEL 900IF
Iron Filter

For water with Iron.
Reduces iron bacteria and up to 2PPM of Hydrogen Sulfide.

*A Waterboss Water softener is highly recommended when using a Waterboss Filter.

MODEL 900NF
Acid Neutralizing Filter

For water with low pH.
pH measures acidity and alkalinity.
Low pH indicates acidity and can cause corrosion in pipes and fixtures.

SPECIFICATIONS	MODEL 700	MODEL 900	MODEL 950 City Unit	900IF Filter	900NF Filter
Maximum compensated hardness:	70 grains per gallon (gpg)	90 grains per gallon (gpg)	35 grains per gallon (gpg)	N/A	N/A
Maximum hardness removed:	22,600 grains	36,490 grains	22,600 grains	N/A	N/A
Maximum ferrous iron reduction:	10 ppm	10 ppm	0	15 ppm	N/A
Minimum pH (standard units):	7	7	7	7	6.3
Salt used per regeneration:	1 to 12 lbs. variable*	1 to 15 lbs. variable*	1 to 12 lbs. variable*	2.8 oz**	backwash only
Length of regeneration cycle:	20 minutes @ (2.5 lbs.)	26 minutes @ (2.5 lbs.)	20 minutes @ (2.5 lbs.)	44 minutes	7 minutes
Water used per regeneration:	15 gallons @ (2.5 lbs.)	18 gallons @ (3 lbs.)	19 gallons @ (2.5 lbs.)	66 gallons	35 gallons
Salt Storage:	120 lbs.	160 lbs.	160 lbs.	5 lbs.**	N/A
Maximum water temperature:	120°	120°	120°	80°	120°
Shipping weight:	85 lbs.	105 lbs.	105 lbs.	115 lbs.	125 lbs.
Water pressure (min. - max. psi):	20 - 120			30 - 120	
Height:	25 ¾″	30 ¾″			
Footprint (WxD):	14 ¾″ x 18 ¾″				
Plumbing connections :	¾″ or 1″ NPT				
Valve Size:	1″				
Electrical requirements:	110/120 VAC, 12V 50/60 cycle				

Operational maintenance and replacement requirements are essential for the product to perform to specification.

** Dependent on water hardness level and the number of people living in the home.*

*** Potassium Permanganate*

www.waterboss.com

WaterBoss® WATER SOFTENER

Supplies Included:

- Manual & Installation Guide
- Water Test Strips
- 12v Transformer
- Overflow Elbow
- Drain Line

Additional Supplies Needed*:

- 1″ NPT Female Connectors (2)
- ½″ Overflow Tube
- Drain Line Hose Clamp

*Waterboss recommends to use a braided stainless steel Water Softener connector.



General plumbing knowledge and additional supplies are needed for installation. Consult your local plumbing professional for assistance.

5/10 YEAR LIMITED WARRANTY — 5/10 Year Warranty: 5 year warranty on all parts including electronics. 10 year warranty on media tank and outershell from manufacturer defects.

NSF®

MADE IN USA

5/10 YEAR LIMITED WARRANTY

P.O. Box 298 Groveport, OH 43125
Visit our website at www.waterboss.com
Or call our toll free help line: 1-800-437-8993
Monday - Friday 8:00AM to 5:00PM EST.

Form#54336S 2019

WaterBoss® WATER SOFTENER



See the brightness, feel the softness, and taste the difference that soft water can make in your life!

MADE IN USA

5/10 YEAR LIMITED WARRANTY

www.waterboss.com

WaterBoss® WATER SOFTENER

Save: Money Time Water

Model 700



Ideal for family size 2+

Model 900




Ideal for family size 4+

Model 950 has the same dimensions as Model 900

Our patented High Efficiency Design means you use less water and salt compared to conventional softeners.

WaterBoss® WATER SOFTENER

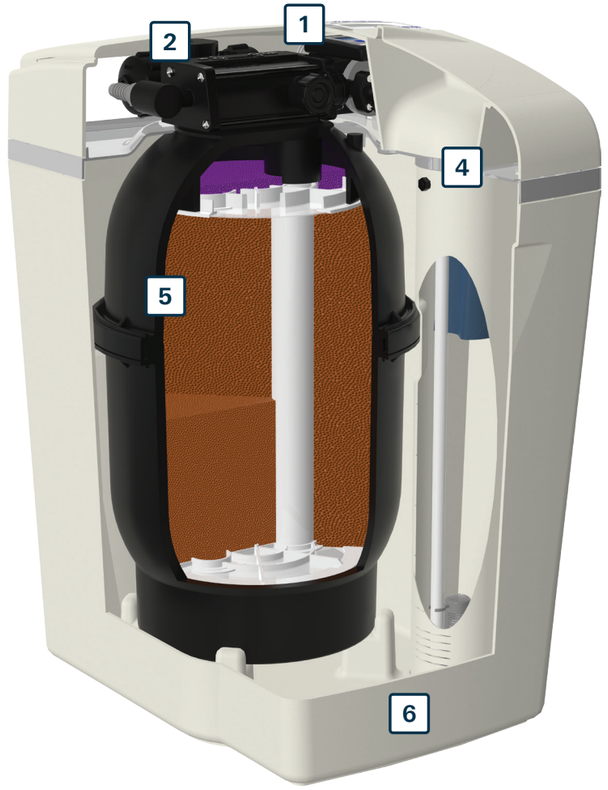

1 Controller
- Regenerate on demand - Never waste salt or water.
- Patented MediaGuard - Monitors and adjusts operation continuously so you never miss soft water.
- Easy one-step configuration

2 Bypass Valve
- Factory Installed
- Easy to operate
- ¾" or 1" connections

3 Built-In Filter
- Whole house built-in dirt and sediment filter
- Never buy a cartridge again
- Exclusive self-cleaning media filters to 20 microns

4 Safety Shut-Off System

5 Dual Compartment Media Tank
High capacity vacuum-packed softening resin

6 Weather Resistant Cabinet

3 Built-In Self Cleaning Filter.
No Additional Filter Purchases Required.