

## DRYLOK® HD-9000 MASONRY WATERPROOFER



**PATCH:**  
Holes and cracks



**DRYING TIME:**  
2-3 hours, recoat  
in 2 hours



**COVERAGE:**  
1st coat: 75 sq. ft.  
per gal., 2nd coat:  
75-100 sq. ft.  
per gal.



**CLEAN-UP:**  
Use warm,  
soapy water

DRYLOK® HD-9000 is a professional grade masonry waterproofer featuring Flexible Encapsulated Polymers that protect the masonry surface and aesthetic integrity by providing a waterproof barrier to water movement into or out of the structure. DRYLOK® HD-9000 is specially formulated to resist mildew growth on the dry paint film with the incorporation of a biocide. DRYLOK® HD-9000 is ideal for basements, stucco, masonry pools, under block, poured concrete, and more. An extensive tintable color palette makes DRYLOK® HD-9000 a one-step solution for waterproofing and beautification. Tested to ASTM D-7088 Resistance to Hydrostatic Pressure and ASTM D-6904 Resistance to Wind Driven Rain. When applied properly, DRYLOK® HD-9000 will hold back 15 PSI, equivalent to a wall of water 33 feet high and 140 mile per hour wind-driven rain penetration on masonry's positive and negative sides. Fully transferable 18-year warranty\*.

**SURFACE PREPARATION:** Surface must be clean and free from dirt, dust, grease, oil, form release compound, or paint. EFFLORESCENCE, a white, powdery, crystal-like deposit visible on the masonry surface, must be removed. DRYLOK® ETCH, used according to manufacturer's directions, is an effective efflorescence removal agent. Re-apply acid until all visible efflorescence is gone. Rinse thoroughly and allow to dry. Patch all holes or cracks, especially the floor/wall joint, with DRYLOK® FAST PLUG® and smooth the patch evenly with the surface around it.

**WET WALL PREPARATION:** For best results, apply to a bare, dry surface. If the surface appears wet and is not actively leaking, first apply DRYLOK® Wet Wall Bonding Primer according to the label instructions. Applying DRYLOK® Wet Wall Bonding Primer over a bare masonry wall and top coating with DRYLOK® Waterproofer will not void the warranty of the DRYLOK® Masonry Waterproofer. Wait for a dry (rain-free) period for application.

**WARNING!** If you scrape, sand, or remove old paint, you may release lead dust. LEAD IS TOXIC. EXPOSURE TO LEAD DUST CAN CAUSE SERIOUS ILLNESS, SUCH AS BRAIN DAMAGE, ESPECIALLY IN CHILDREN. PREGNANT WOMEN SHOULD ALSO AVOID EXPOSURE. Wear a NIOSH-approved respirator to control lead exposure. Clean up carefully with a HEPA vacuum and a wet mop. Before you start, find out how to protect

yourself and your family by contacting the National Lead Information Hotline at 1-800-424-LEAD or log on to [www.epa.gov/lead](http://www.epa.gov/lead).

**APPLICATION:** STIR THOROUGHLY BEFORE AND DURING APPLICATION. DO NOT THIN. Air and surface temperatures must be 50°F (10°C) or higher. Apply DRYLOK® HD-9000 directly on bare masonry. 2 coat application is required (17 wet mils). For spray specs, visit [www.DRYLOK.com](http://www.DRYLOK.com). If sprayed or rolled, back brush the first coat to fill all pinholes in the masonry. If brushed, work the DRYLOK® HD-9000 into the pores of the masonry, making sure to fill all pores and pinholes (see COVERAGE). The second coat may be applied by the same methods. When painting the inside of bare concrete swimming pools, allow DRYLOK® HD-9000 to dry at least one week before putting into service. DRYLOK® HD-9000 may be applied over previous coatings in sound condition, but the warranty is void. Not formulated for horizontal surfaces subject to foot traffic (see DRYLOK® Floor & Wall Masonry Waterproofer).

**IMPORTANT:** After applying the second coat of DRYLOK® HD-9000, carefully inspect the entire wall surface for any pinholes in the waterproof coating. Any affected area should be painted with an additional coat to ensure satisfactory waterproofing results.

**TINTING:** Use alkali-proof universal tinting colorants. Use only 50% of color normally recommended. Do not use more than 4-1/2 oz of colorant per gallon.

**WARNING!** Vapor harmful. May affect the brain or nervous system causing dizziness, headache, or nausea. Causes eye, nose, and throat irritation. May be harmful if absorbed through skin. Harmful if swallowed. Do not take internally.

**NOTICE:** Reports have associated repeated and prolonged occupational overexposure to solvents with permanent brain and nervous system damage. Intentional misuse by deliberately concentrating and inhaling the contents may be harmful or fatal. Use only with adequate ventilation. Do not breathe vapors or spray mist. Ensure fresh air entry during application and drying. If you experience eye watering, headache, or dizziness, or if air monitoring demonstrates vapor/mist levels are above applicable limits, wear an appropriate, properly fitted respirator (NIOSH-approved) during and after application. Follow respirator manufacturer's directions for respirator use. Do not get in eyes, on skin, or clothing. Wash thoroughly after handling.

**First Aid:** In case of eye contact, immediately flush eyes with plenty of water for at least 15 minutes, call poison control center, hospital emergency room, or physician immediately; for skin, wash thoroughly with soap and water. If you experience difficulty breathing, leave the area to obtain fresh air. If continued difficulty is experienced, call poison control center, hospital emergency room, or physician immediately. If swallowed, do not induce vomiting. Call poison control center, hospital emergency room, or physician immediately.

**KEEP OUT OF REACH OF CHILDREN. DO NOT TAKE INTERNALLY. KEEP FROM FREEZING.**

If spilled, contain spilled material and remove with inert absorbent. Dispose of contaminated absorbent, container, and unused contents in accordance with local, state, and federal regulations.

**WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

**\*WARRANTY:** DRYLOK® HD-9000 MASONRY WATERPROOFER, when applied according to directions on a properly prepared bare masonry surface, is warranted to provide a waterproof coating for eighteen (18) years from date of sale or we will refund the cost of the DRYLOK® HD-9000 MASONRY WATERPROOFER. Warranty includes subsequent owners. This is the exclusive remedy. Excludes leaks due to cracking of the surface, recurring efflorescence, swimming pools, and over surfaces previously coated with a paint other than DRYLOK® Masonry Waterproofer. ANYONE HANDLING THIS PRODUCT CAN VISIT OUR WEBSITE AT [www.UGL.com/warranties](http://www.UGL.com/warranties) TO REVIEW AND DOWNLOAD COMPLETE DETAILS OF THE WARRANTY'S TERMS AND CONDITIONS.

UNITED GILSONITE LABORATORIES, 1396 Jefferson Ave., Dunmore, PA 18509  
Order No. 90005 L422 [www.DRYLOK.com](http://www.DRYLOK.com)  
R6198



**UGL**  
UNITED GILSONITE  
LABORATORIES



EXCLUSIVELY AT THE HOME DEPOT

WHITE  
(TINTABLE)

**UGL**

# DRYLOK®

## HD-9000

### PROFESSIONAL GRADE MASONRY WATERPROOFER

**GUARANTEED TO PROTECT** Against water seepage,  
leaks, and dampness

Ultra smooth,  
tintable



Mold & mildew resistant  
on the dry paint film

Apply  
by




Protects basement walls  
and building exteriors

**18** YEAR  
WARRANTY



DOES NOT EXCEED  
MAXIMUM VOC 100 g/L

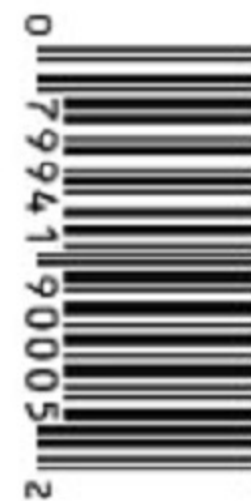

**WARNING:**

Vapor harmful. Harmful if inhaled.  
Read other cautions on back panel.

**620 FL. OZ.**  
(18.34 L)

MADE IN USA